ELECTRIC RANGES

GAS RANGES

STEAM Clean

Steam Clean Option
The new Steam Clean option spot cleans your oven interior in 20 minutes. Used routinely to clean light spills on the bottom of the oven, it keeps the oven clean and reduces the need for frequent self-clean cycles.

Hidden Bake Element
The hidden bake element positioned below the oven floor simplifies cleanup by providing a smooth surface that is easy to wipe clean.

Increased Oven Capacity
Oven capacity has been expanded to 5.3 cu. ft., for an oven that can handle your largest cooking jobs—even a jumbo holiday turkey or an oversized casserole.

TimeSavor™ Plus Convection Cooking System
A fan and third heating element of the TimeSavor™ Plus convection cooking system circulates preheated air over, under and around food to seal in flavor and juices.

Versatile Radiant Elements
6"/9", 9"/12" and 6"/9"/12" radiant elements give you the kind of flexibility and uniform heat you need for simmering, boiling and frying with various sizes of pots and pans.

EZ-Clean Full-Width Cast-Iron Grates
Dishwasher safe full-width satin finish cast iron grates have a smooth surface making it easy to wipe down.

Increased Oven Capacity
Oven capacity has been expanded to 5.0 cu. ft., for an oven that can handle your largest cooking jobs—even a jumbo holiday turkey or an oversized casserole.

TimeSavor™ Convection Cooking System
The TimeSavor™ convection cooking system uses a rear fan to distribute heat more efficiently to seal in flavor and juices.

Power™ Burners
Power™ burners generate the high heat needed for rapid boiling, searing and frying—up to 17,000 BTUs.

AccuSimmer® Burner
The 5,000 BTU AccuSimmer® burner is perfect for making sauces, melting chocolate and creating other dishes that require slow cooking.

Powerpair™ Cooking Centers

MICROWAVE HOODS

GH7208XR | GMH6185XV* | GMH5205XV* | GMH5184XV | WMH3205XV | WMH2205XV | WMH2175XV | WMH1162XV

FREESTANDING ELECTRIC RANGES

GFE471LV | GFE461LV | WFE381LV | WFE371LV | WFE366LV** | WFE361LV | WFE321LW | WFE301LV

RF264LXS | RF263LXT | WFE114LW | RF114PXS | RF111PXS | RF110AXS | RF301OXT

FREESTANDING GAS RANGES

GFG471LV | GFG461LV | WFG381LV | WFG371LV | WFG361LV | WFG231LV | WFG114SV | WFG111SV | WFG110AV

SLIDE-IN RANGES

ELECTRIC — GAS

GY399LXU | GY397LXU | RY160LXT | GW399LXU | GW397LXU

Multiple Appliance Technology
Together, two appliances unite efficient features for the ultimate in cooking performance. Whether you're steaming and using the convection oven, or defrosting and simmering… it's easy to be efficient with a PowerPair™ cooking center. You'll save time, effort and space in the kitchen while serving a deliciously hot meal all at once.

Increased Total Capacity
Emulate the space of a double oven without the cost of redesigning. A PowerPair™ cooking center offers up to 6.3 cu. ft. of capacity.

Easy-to-Clean Interiors
The microwave hood combination in a PowerPair™ cooking center may feature a CleanRelease® non-stick interior that makes clean-up easy. Self-cleaning and Steam Clean freestanding ranges do the dirty work for you.

* Available in October 2009. ** Retail/Contract Exclusive

Whirlpool Gold® GGE350LW DOUBLE OVEN

KEY FEATURES

- Whirlpool Corporation First Double-Oven Range
- Combined Oven Capacity of 6.3 cu. ft.
- Eco-Friendly, Schott Ceran® Ceramic-Glass CleanTop® Cooking Surface
- Precise Clean™ Self-Cleaning System
- AccuBake® Temperature Management System in Both Ovens
- Sabbath Mode in Both Ovens

COLORS

White(Q) Black(B) Stainless Steel(S)

®Schott Ceran is a Registered Trademark of SCHOTT North America, Inc.

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

Model No.	Whirlpool Gold® Double Oven GGE350LW
Capacity (cu. ft.)	2.0/4.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
9" Radiant element	1
9"/12" Dual Radiant Element	1
6" Warm Zone Element	Yes
Oven	
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Sabbath Mode	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	3
Oven Window	EasyView™
Self-Cleaning System	Precise Clean™
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

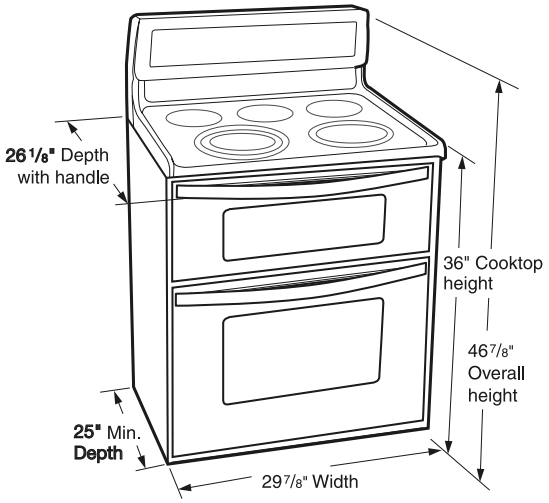

Cut-Out Dimensions

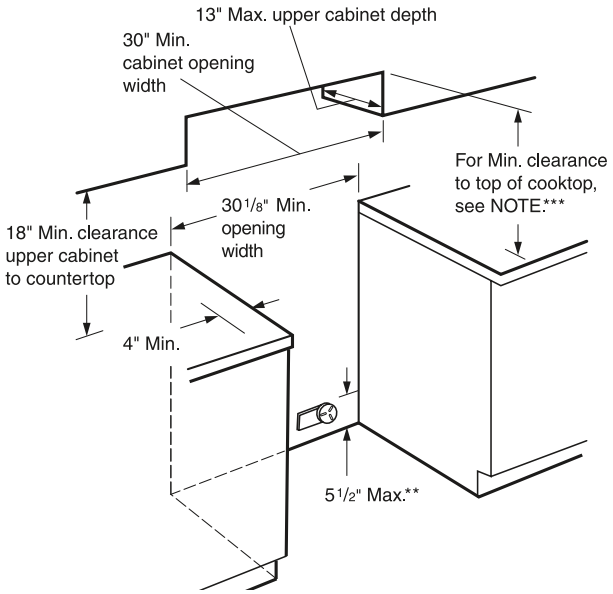
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GFE471LV

STEAM Clean

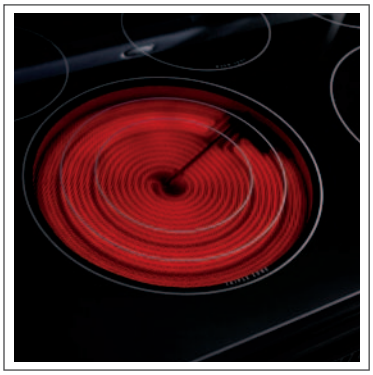

KEY FEATURES

- Steam Clean
- Hidden Bake Element
- Triple Radiant Element
- TimeSavor™ Plus Convection Cooking System
- Warming Drawer
- Energy Save

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool Gold®
Model No.	**GFE471LV**
Capacity (cu. ft.)	5.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
6"/9" Dual radiant element	1
6"/9"/12" Radiant Element	1
6" Warm Zone Element	Yes
Oven	
Steam Clean Option	Yes
Hidden Bake Element	Yes
TimeSavor™ Convection Cooking System	Plus
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Control Bake	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Sabbath Mode	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	2 Adjustable, 1 Split
Oven Window	EasyView™
Full-Width Storage Drawer	Warming
Self-Cleaning System	Precise Clean™
Overall Features	
Energy Save Mode	Yes
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

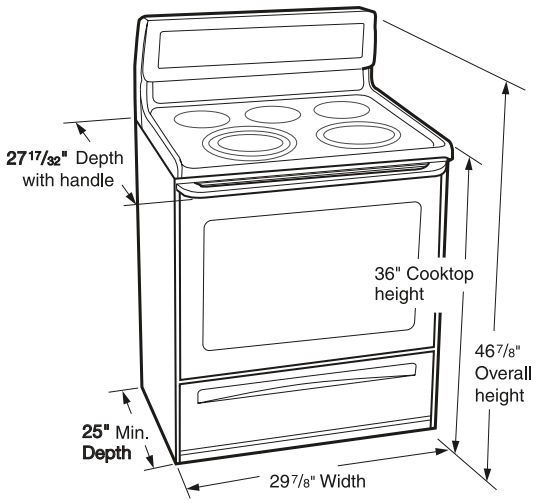

Cut-Out Dimensions

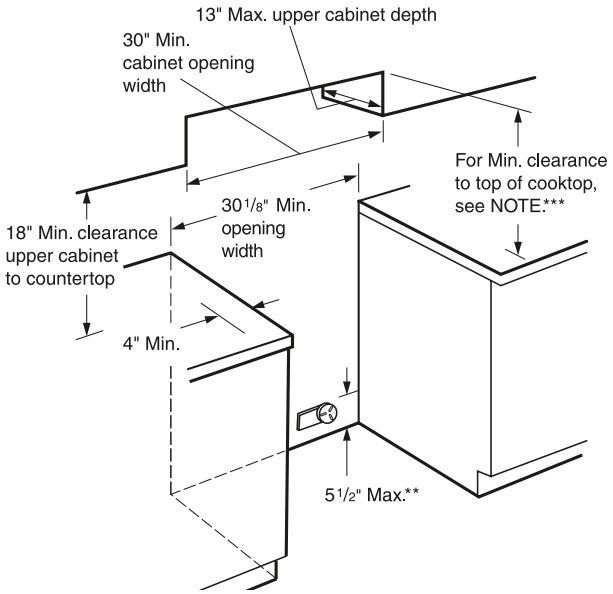
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GFE461LV

STEAM Clean

KEY FEATURES

- Steam Clean
- Hidden Bake Element
- Large Oven Capacity
- TimeSavor™ Plus Convection Cooking System
- Energy Save
- AccuBake® Temperature Management System

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool Gold®
Model No.	**GFE461LV**
Capacity (cu. ft.)	5.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
6"/9" Dual radiant element	1
9"/12" Dual radiant element	1
6" Warm Zone Element	Yes
Oven	
Steam Clean Option	Yes
Hidden Bake Element	Yes
TimeSavor™ Convection Cooking System	Plus
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Control Bake	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Sabbath Mode	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	3 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Self-Cleaning System	Precise Clean™
Overall Features	
Energy Save Mode	Yes
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

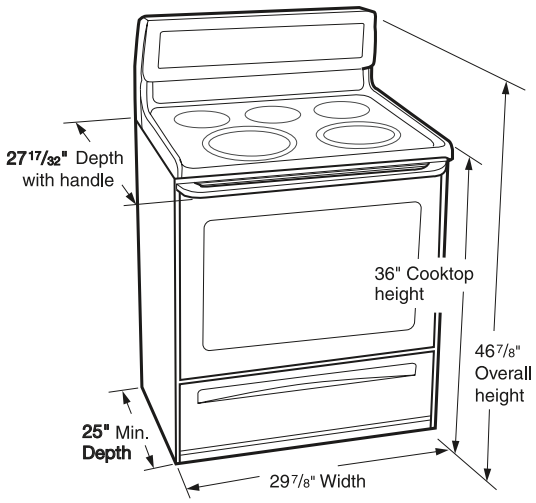

Cut-Out Dimensions

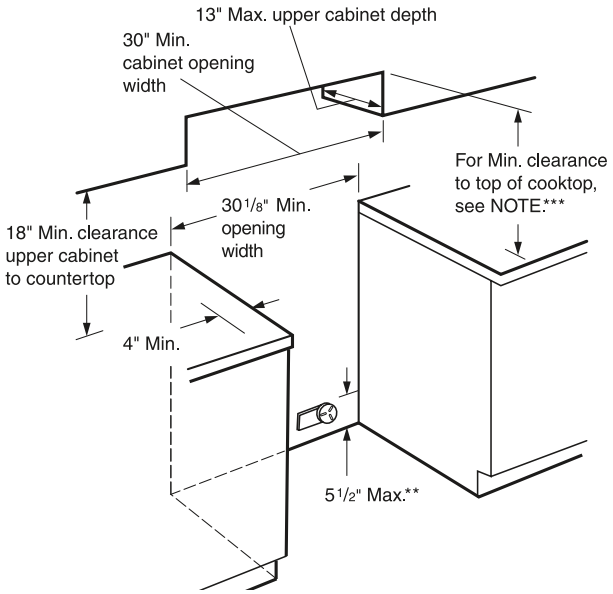
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE381LV

STEAM Clean

KEY FEATURES

- Steam Clean
- Hidden Bake Element
- Large Oven Capacity
- Rapid Boil and 9"/12" Dual Radiant Elements
- TimeSavor™ Convection Cooking System
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE381LV**
Capacity (cu. ft.)	5.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
6"/9" Dual radiant element	1
9"/12" Dual radiant element	1
6" Warm Zone Element	Yes
Oven	
Steam Clean Option	Yes
Hidden Bake Element	Yes
TimeSavor™ Convection Cooking System	Yes
AccuBake® Temperature Management System	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	2 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Self-Cleaning System	Yes
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

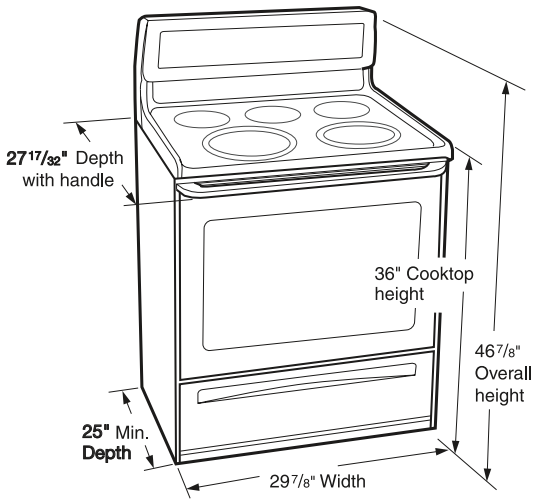

Cut-Out Dimensions

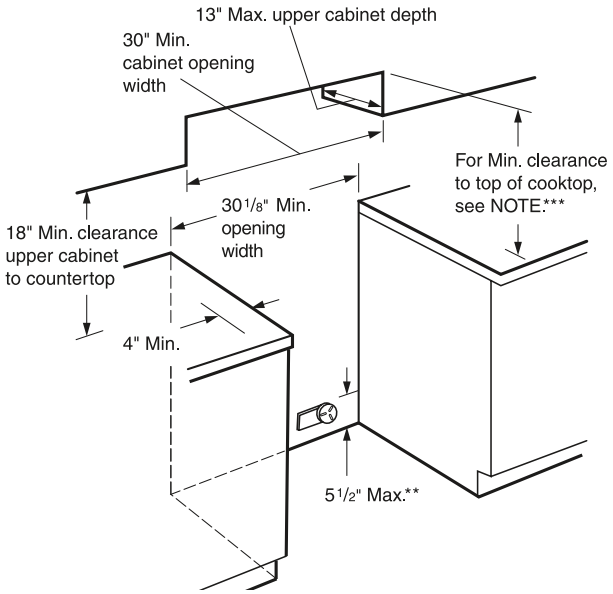
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE371LV

STEAM Clean

KEY FEATURES

- Steam Clean
- Hidden Bake Element
- Large Oven Capacity
- 12" Radiant Element
- 6" Warm Zone Element
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE371LV**
Capacity (cu. ft.)	5.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
12" Radiant Element	1
6"/9" Dual radiant element	1
6" Warm Zone Element	Yes
Oven	
Steam Clean Option	Yes
Hidden Bake Element	Yes
AccuBake® Temperature Management System	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	2 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Self-Cleaning System	Yes
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

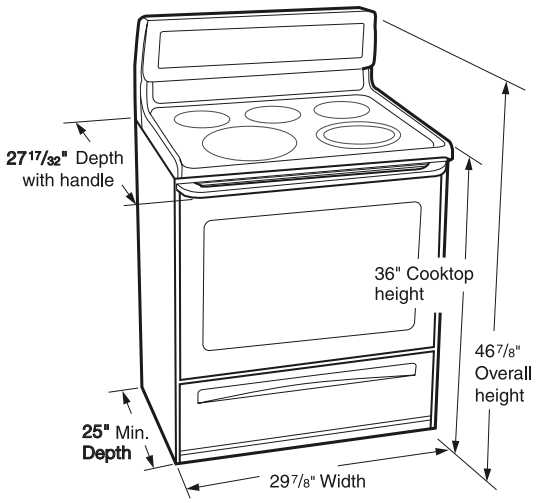

Cut-Out Dimensions

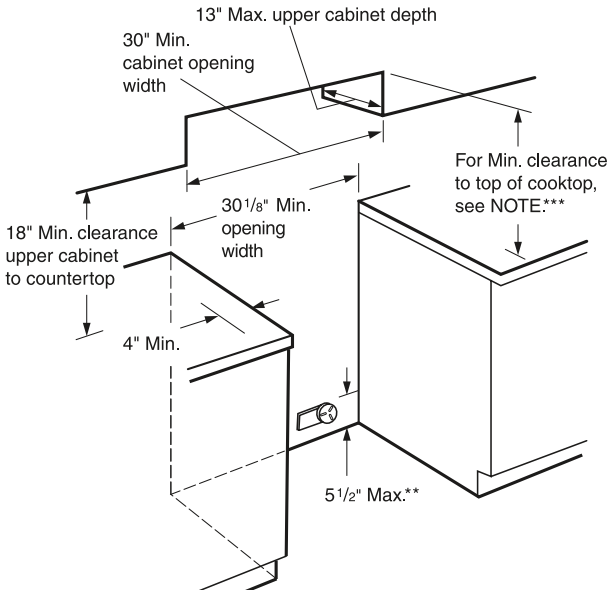
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE366LV

KEY FEATURES

- Contract Exclusive
- Hidden Bake Element
- Upswept, Eco-Friendly, Ceramic-Glass CleanTop® Cooktop
- 5.3 cu. ft. Capacity
- Two 6", One Dual 6"/9", and One 12" Radiant Elements
- AccuBake® Temperature Management System

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE366LV**
Capacity (cu. ft.)	5.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
12" Radiant Element	1
6"/9" Dual radiant element	1
Oven	
Hidden Bake Element	Yes
AccuBake® Temperature Management System	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	2 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Self-Cleaning System	Yes
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

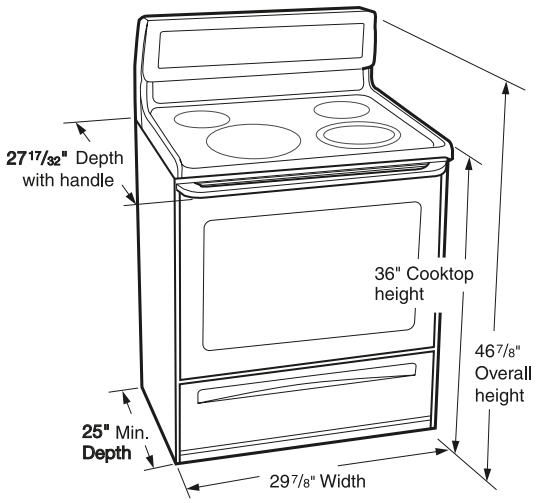

Cut-Out Dimensions

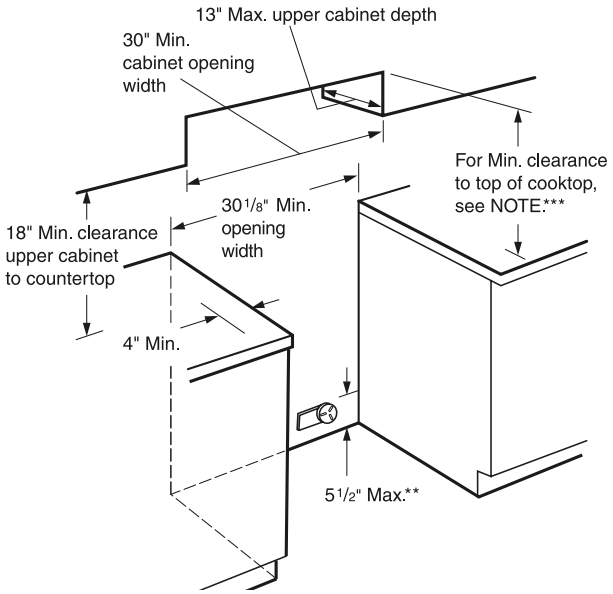
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE361LV

KEY FEATURES

- EasyView™ Oven Window
- Upswept, Eco-Friendly, Ceramic-Glass CleanTop® Cooktop
- 4.8 cu. ft. Capacity
- Two 6", One 9", and One 6"/9" Dual Radiant Elements
- Storage Drawer
- Self Clean

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S) Universal Silver(D)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE361LV**
Capacity (cu. ft.)	4.8
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
9" Radiant Element	1
6"/9" Dual radiant element	1
Oven	
Custom Broil	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	2 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Self-Cleaning System	Yes
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

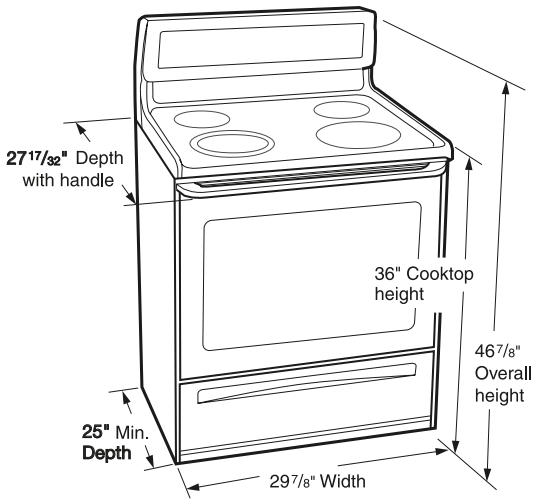

Cut-Out Dimensions

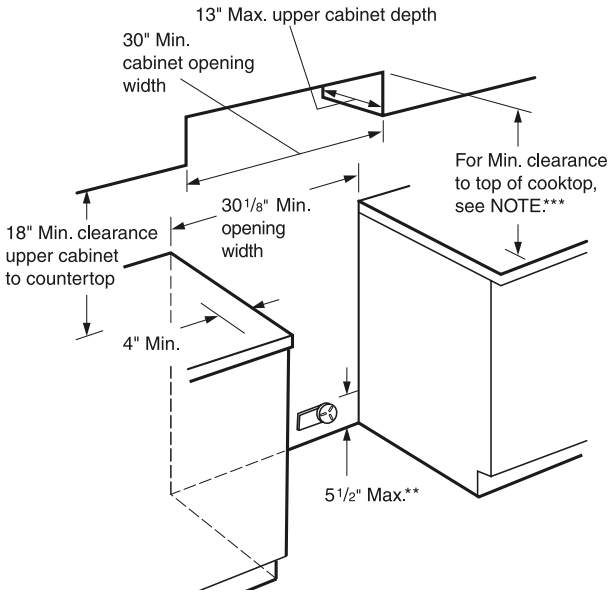
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE321LV

STEAM Clean

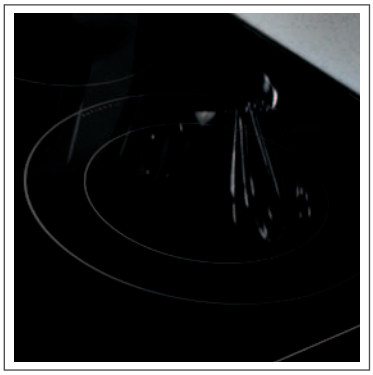

KEY FEATURES

- Steam Clean
- Upswept, Eco-Friendly, Ceramic-Glass CleanTop® Cooktop
- 5.3 cu. ft. Capacity
- One 12", Two 6" and One 8" Radiant Elements
- AccuBake® Temperature Management System
- Hidden Bake Element

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE321LV**
Capacity (cu. ft.)	5.3
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
8" Radiant Element	1
12" Radiant Element	1
Oven	
Steam Clean	Yes
Hidden Bake Element	Yes
AccuBake® Temperature Management System	Yes
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lockout	Yes
Clock & Timer	Yes
Automatic Oven Light	Yes
Racks	2 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Self-Cleaning System	Yes
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

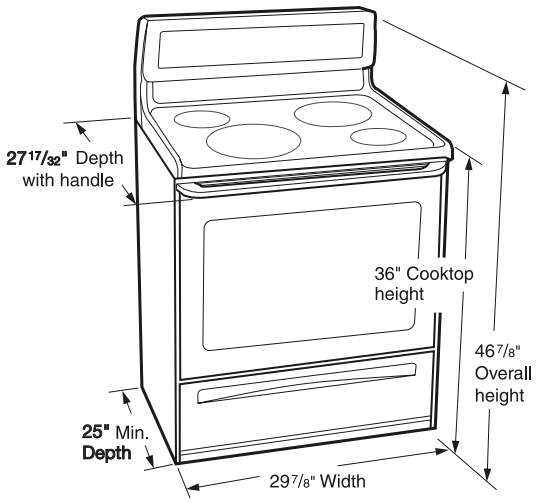

Cut-Out Dimensions

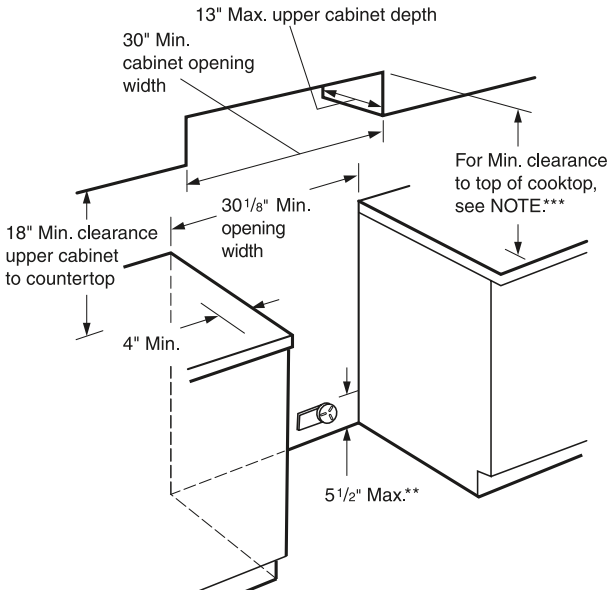
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE301LV

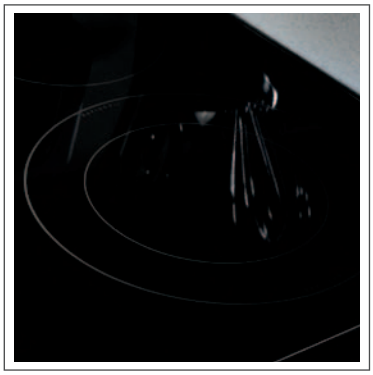

KEY FEATURES

- Upswept, Eco-Friendly, Ceramic-Glass CleanTop® Cooktop
- 4.8 cu. ft. Capacity
- Two 6", and Two 8" Radiant Elements
- Extra-Large, EasyView™ Window
- Custom Broil
- Clock and Timer

COLORS

White(Q) Black(B) Stainless Steel(S)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE301LV**
Capacity (cu. ft.)	4.8
Control system	Electronic
Cooktop	
Ceramic Glass CleanTop® System	Yes
6" Radiant Element	2
8" Radiant Element	2
Oven	
Custom Broil	Yes
Clock & Timer	Yes
Racks	2 Adjustable
Oven Window	EasyView™
Full-Width Storage Drawer	Yes
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

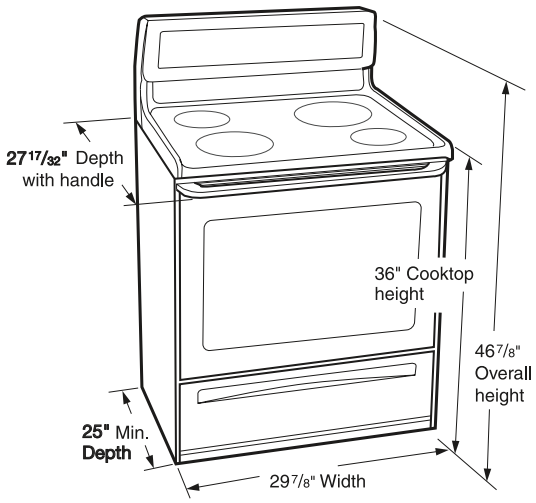

Cut-Out Dimensions

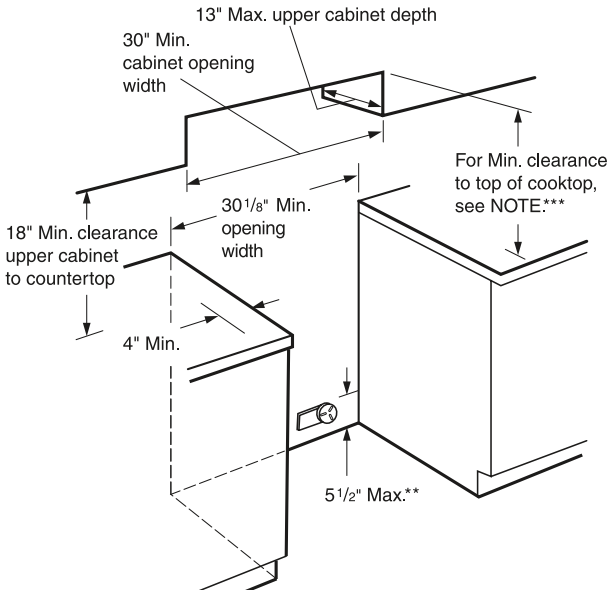
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RF264LXS

KEY FEATURES

- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.8 cu. ft. Oven
- Two 6" and Two 8" High-Speed Coil Elements
- AccuBake® Temperature Management System
- Custom Broil
- Extra-Large, EasyView™ Window

COLORS

White(Q) Black(B)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF264LXS**
Capacity (cu. ft.)	4.8
Controls	Electronic
Cooktop	
6" High-Speed Coil Element (1,500 Watts)	2
8" High-Speed Coil Element (2,600 Watts)	2
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Cooktop "On" Indicator Light	Yes
Oven	
AccuBake® Temperature Management System	Yes
Delay Bake	Yes
Custom Broil	Yes
Clock and Timer	Yes
Control Lockout	Yes
Oven Light	Automatic
Oven Window	EasyView™
2 Adjustable Racks	Yes
Self-Cleaning System	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	136
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 14.1 Kwh 10.7 KWH

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

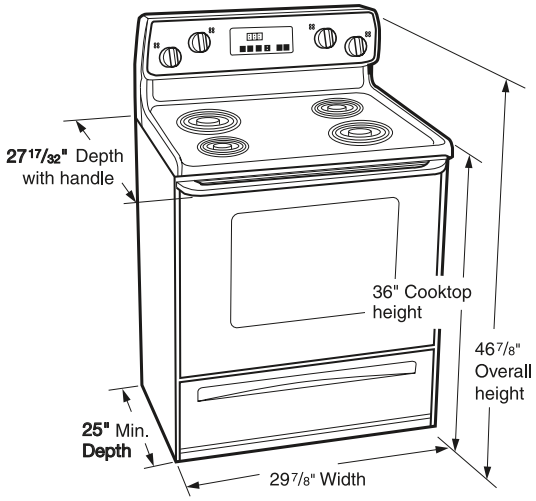

Cut-Out Dimensions

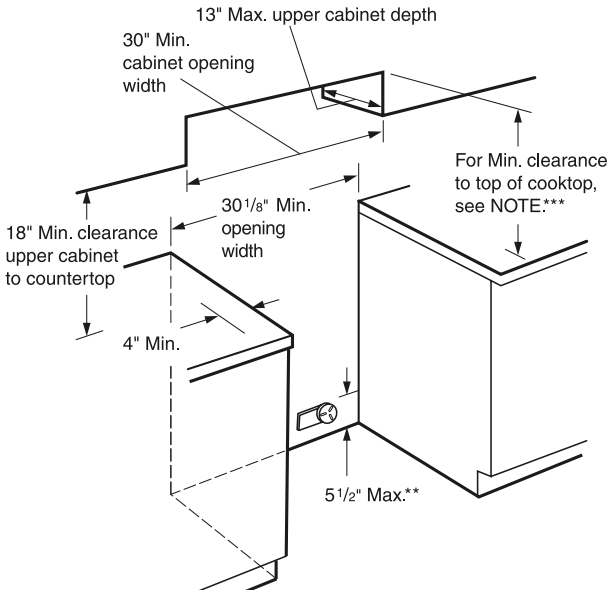
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RF263LXT

KEY FEATURES

- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.8 cu. ft. Oven
- Two 6" and Two 8" High-Speed Coil Elements
- Custom Broil
- Extra-Large, EasyView™ Window
- Self Clean

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF263LXT**
Capacity (cu. ft.)	4.8
Controls	Electronic
Cooktop	
8" High-Speed Coil Element (2,600 Watts)	2
6" Coil Element (1,500 Watts)	2
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Cooktop "On" Indicator Light	Yes
Oven	
Delay Bake	Yes
Custom Broil	Yes
Clock and Timer	Yes
Control Lockout	Yes
Oven Light	Automatic
Oven Window	EasyView™
2 Adjustable Racks	Yes
Self-Cleaning System	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	138
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 14.1 10.7

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

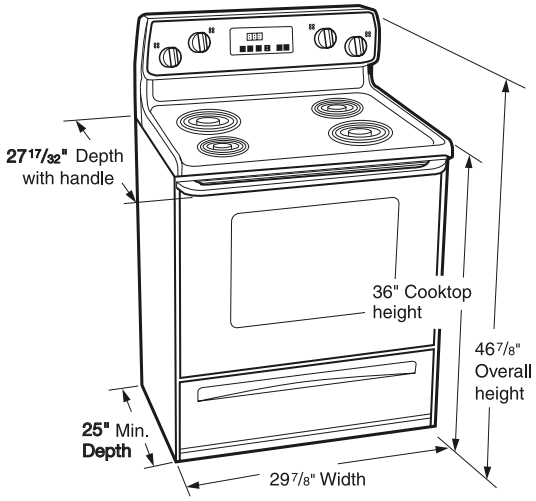

Cut-Out Dimensions

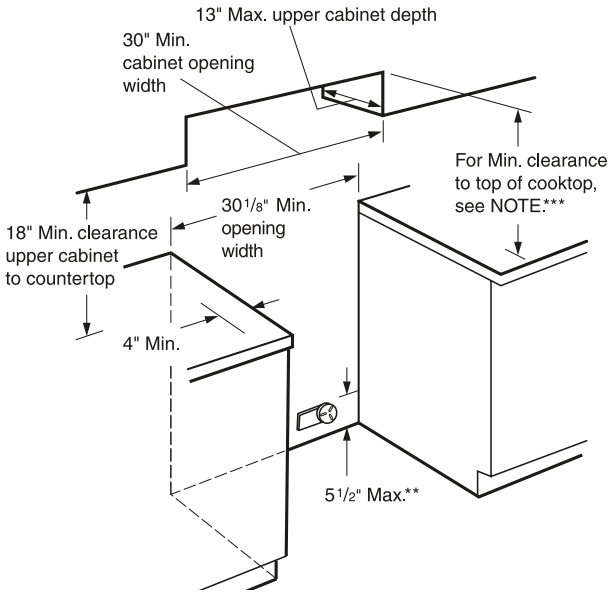
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFE114LW

KEY FEATURES

- CONTRACT EXCLUSIVE
- 4.8 cu. ft. Oven
- Two 6" and Two 8" Coil Elements
- AccuBake® Temperature Management System
- Extra-Large, EasyView™ Window
- Chrome Drip Bowls

COLORS

Stainless Steel(S)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**WFE114LW**
Capacity (cu. ft.)	4.8
Controls	Electronic
Cooktop	
6" Coil Element (1,500 Watts)	2
8" Coil Element (2,100 Watts)	2
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Cooktop "On" Indicator Light	Yes
Oven	
AccuBake® Temperature Management System	Yes
Custom Broil	Yes
Clock and Timer	Yes
Control Lockout	Yes
Oven Light	Automatic
Oven Window	EasyView™
2 Adjustable Racks	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	141
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 14.1 Kw 10.6 Kw

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

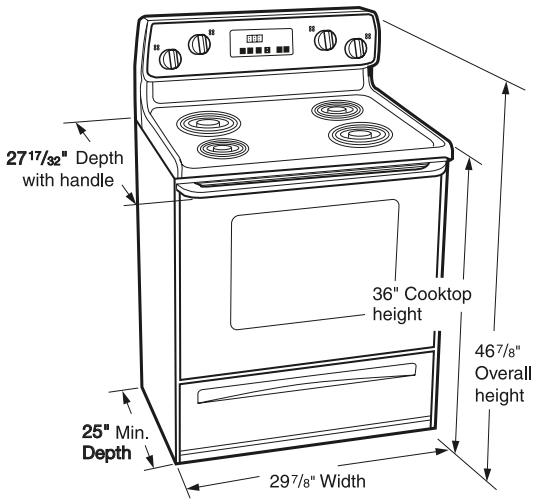

Cut-Out Dimensions

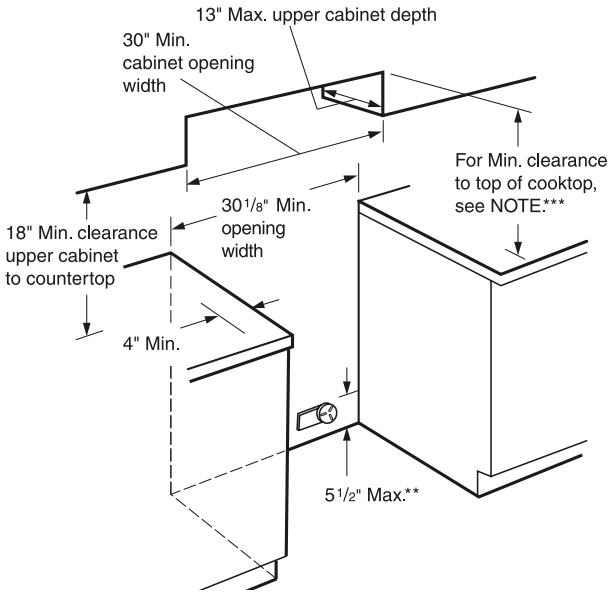
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE:***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RF114PXS

KEY FEATURES

- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.8 cu. ft. Oven
- Two 6" and Two 8" Coil Elements
- Chrome Drip Bowls
- Clock and Timer
- Oven Window

COLORS

White(Q) Biscuit(T) Black(B)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF114PXS**
Capacity (cu. ft.)	4.8
Controls	Electronic
Cooktop	
6" Coil Element (1,250 Watts)	2
8" High-Speed Coil Element (2,600 Watts)	2
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Cooktop "On" Indicator Light	Yes
Oven	
Custom Broil	Yes
Clock and Timer	Yes
Oven Light	Automatic
Oven Window	Yes
2 Adjustable Racks	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	141
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 11.7 Kw 8.9 Kw

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

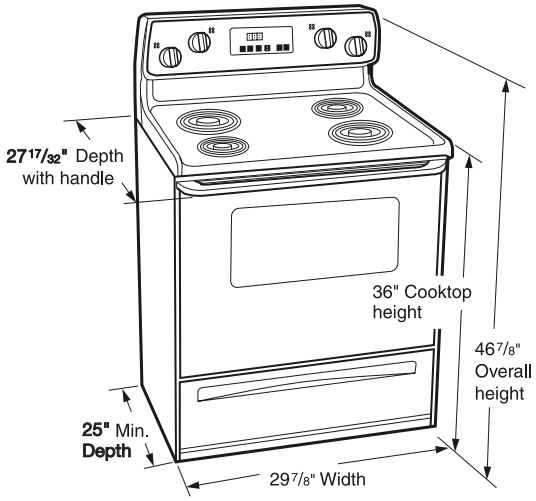

Cut-Out Dimensions

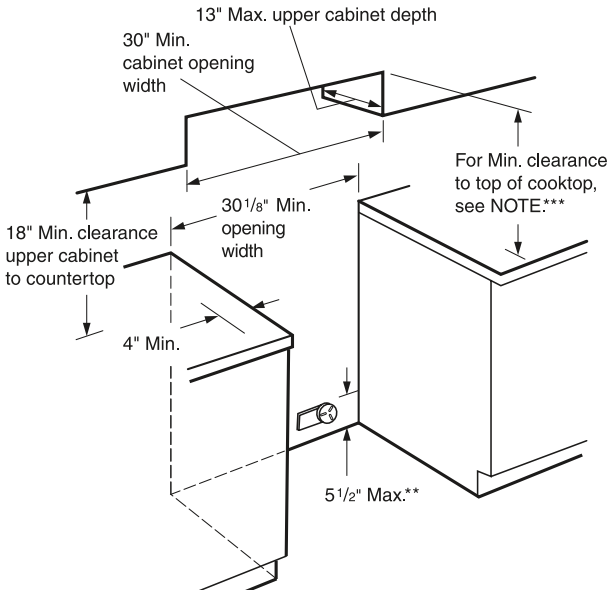
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

- Do not seal range to the side cabinets.
- **If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.**
- **These are not flush-to-cabinet models.**

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RF111PXS

KEY FEATURES

- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.8 cu. ft. Oven
- Three 6" and One 8" Coil Elements
- Chrome Drip Bowls
- Two Full-Width Oven Racks
- Oven Light

COLORS

White(Q)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF111PXS**
Capacity (cu. ft.)	4.8
Controls	Knob
Cooktop	
6" Coil Element (1,250 Watts)	3
8" Coil Element (2,100 Watts)	1
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Cooktop "On" Indicator Light	Yes
Oven	
Oven Light	Manual
Oven Window	Yes
2 Adjustable Racks	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	155
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 9.3 Kw 7.1 Kw

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

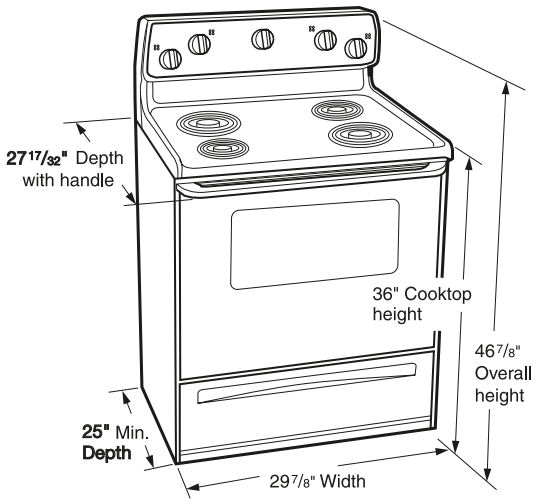

Cut-Out Dimensions

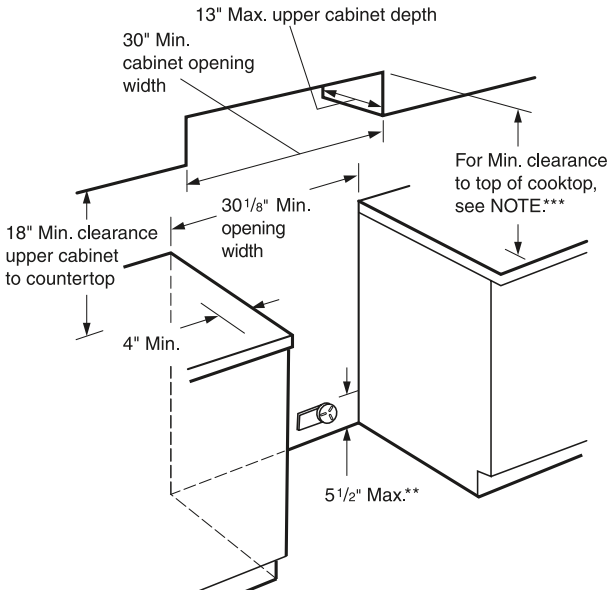
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

- Do not seal range to the side cabinets.
- **If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.**
- **These are not flush-to-cabinet models.**

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RF110AXS

KEY FEATURES

- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.8 cu. ft. Oven
- Three 6" and One 8" Coil Elements
- Chrome Drip Bowls
- Two Full-Width Oven Racks
- Standard Clean Oven

COLORS

White(Q)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF110AXS**
Capacity (cu. ft.)	4.8
Controls	Knob
Cooktop	
6" Coil Element (1,250 Watts)	3
8" Coil Element (2,100 Watts)	1
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Cooktop "On" Indicator Light	Yes
Oven	
Oven Light	Manual
2 Adjustable Racks	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	155
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 9.3 Kw 7.1 Kw

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product Dimensions

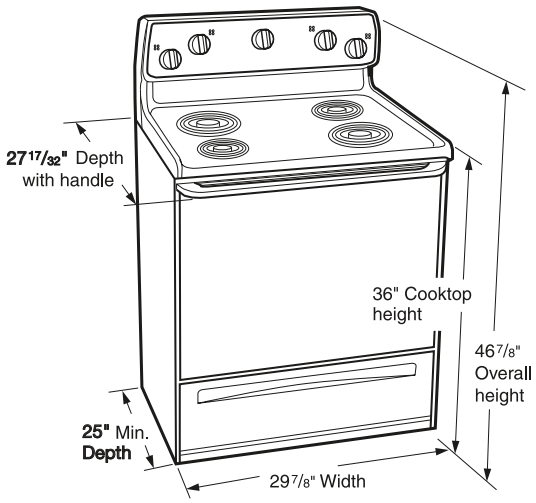

Cut-Out Dimensions

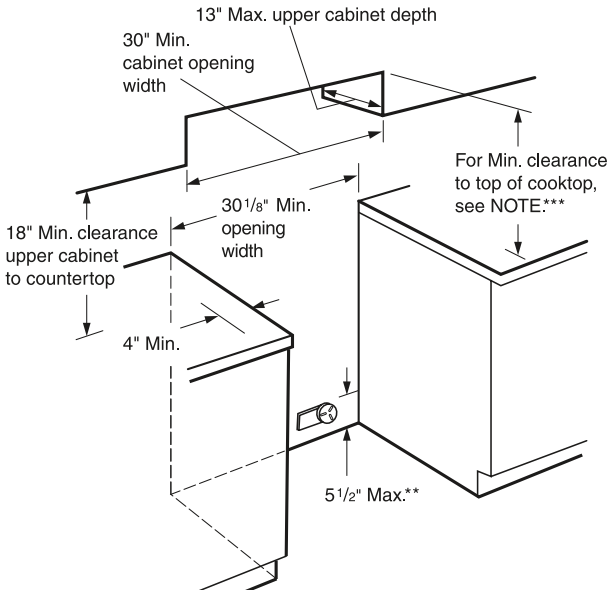
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

*** NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

- Do not seal range to the side cabinets.
- **If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.**
- **These are not flush-to-cabinet models.**

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RF301OXT

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.3 cu. ft. Oven
- Three 6" and One 8" Coil Elements
- Chrome Drip Bowls
- Full-Width Storage Drawer

COLORS

White
with Black
Console(W)

Freestanding Electric Range Features & Specifications

	Whirlpool®
Model No.	**RF301OXT**
Capacity (cu. ft.)	4.3
Controls	Knob
Cooktop	
6" Coil Element (1,250 Watts)	3
8" Coil Element (2,100 Watts)	1
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Drip Pans	Chrome
Oven	
Oven Light	Manual
2 Adjustable Racks	Yes
Overall Features	
Full-Width Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	160
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 8.9 Kw 6.7 Kw

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Product and Cut-Out Dimensions

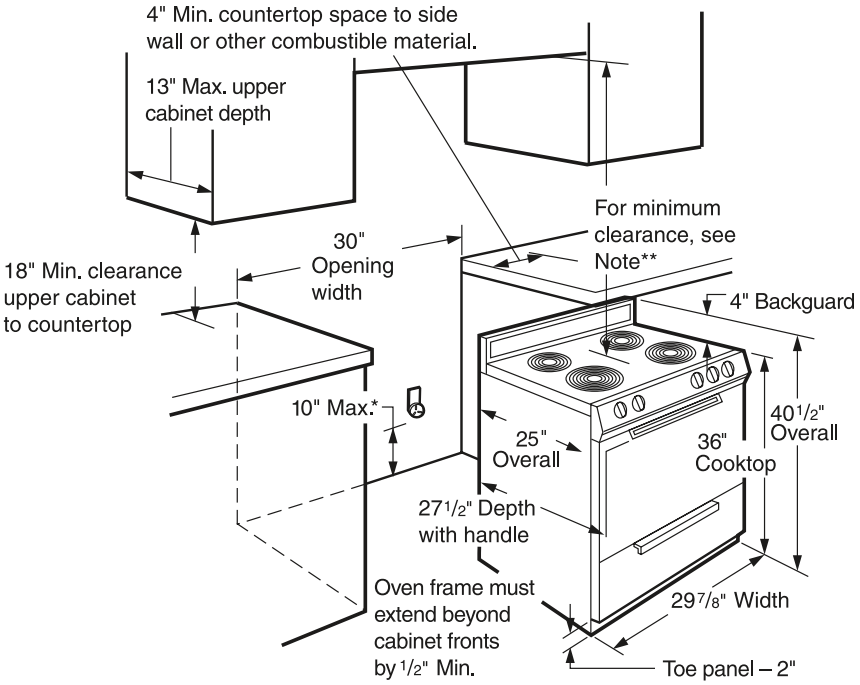
4" Min. countertop space to side wall or other combustible material.
13" Max. upper cabinet depth
For minimum clearance, see Note**
30" Opening width
18" Min. clearance upper cabinet to countertop
4" Backguard
10" Max.*
25" Overall
36" Cooktop
40 1/2" Overall
27 1/2" Depth with handle
Oven frame must extend beyond cabinet fronts by 1/2" Min.
29 7/8" Width
Toe panel – 2"

Do not pinch the power supply cord between the range and the wall.

**Wall receptacle - 8" to 22" from either cabinet, 5 ½" Max. from floor. Position receptacle as shown.

***NOTE: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GFG471LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe Satin Finish Cast-Iron, Full-Width Grates
- Two Power™ Burners with Center Fish Burner
- AccuSimmer® Burner
- TimeSavor™ Convection Cooking System
- Warming Drawer
- Split Rack

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

	Whirlpool Gold®
Model No.	**GFG471LV**
Capacity (cu. ft.)	5.0
Control System	Electronic
Cooktop	
Recessed Cooktop	Full Sump
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Full-Width, Cast-Iron
Sealed Burners	Yes
5,000 BTU AccuSimmer® Burner	1
9,500 BTU Burner	1
15,500 BTU Power™ Burner	1
17,000 BTU Power™ Burner	1
8,000 BTU Middle Burner	1–Fish
Oven	
TimeSavor™ Convection Cooking System	Yes
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Sabbath Mode	Yes
Control Lock	Yes
Clock and Timer	Yes
Oven Light	Automatic
Adjustable Racks	2
Adjustable Split Rack	1
Oven Window	EasyView™
Drawer	Warming
Self-Cleaning System	Precise Clean™
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

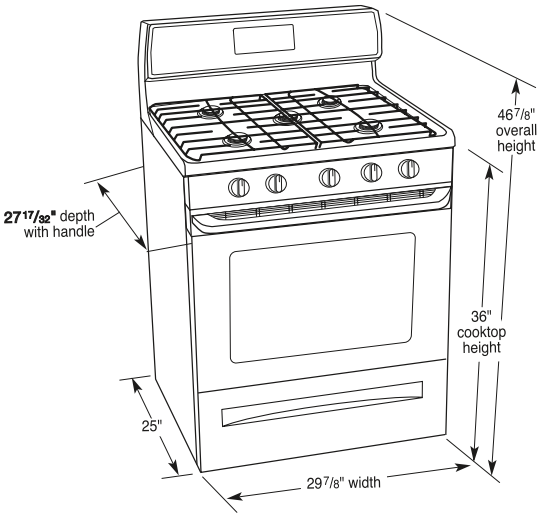

Cut-Out Dimensions

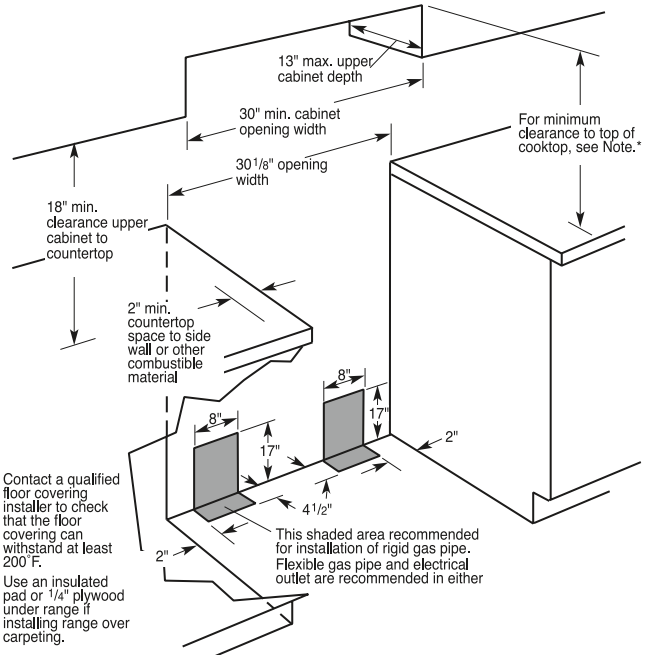
13" max. upper cabinet depth
30" min. cabinet opening width
For minimum clearance to top of cooktop, see Note.*
30 1/8" opening width
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
8"
17"
8"
17"
2"
4 1/2"
2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GFG461LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe Satin Finish Cast-Iron, Full-Width Grates
- Two Power™ Burners with Center Burner
- AccuSimmer® Burner
- TimeSavor™ Convection Cooking System
- 5.0 cu. ft. Oven
- Precise Clean™ Cleaning System

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

	Whirlpool Gold®
Model No.	**GFG461LV**
Capacity (cu. ft.)	5.0
Control System	Electronic
Cooktop	
Recessed Cooktop	Full Sump
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Full-Width, Cast-Iron
Sealed Burners	Yes
5,000 BTU AccuSimmer® Burner	1
9,500 BTU Burner	1
15,500 BTU Power™ Burner	1
17,000 BTU Power™ Burner	1
8,000 BTU Middle Burner	1
Oven	
TimeSavor™ Convection Cooking System	Yes
AccuBake® Temperature Management System	Yes
Rapid Preheat	Yes
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Sabbath Mode	Yes
Control Lock	Yes
Clock and Timer	Yes
Oven Light	Automatic
Adjustable Racks	2
Oven Window	EasyView™
Drawer	Storage
Self-Cleaning System	Precise Clean™
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

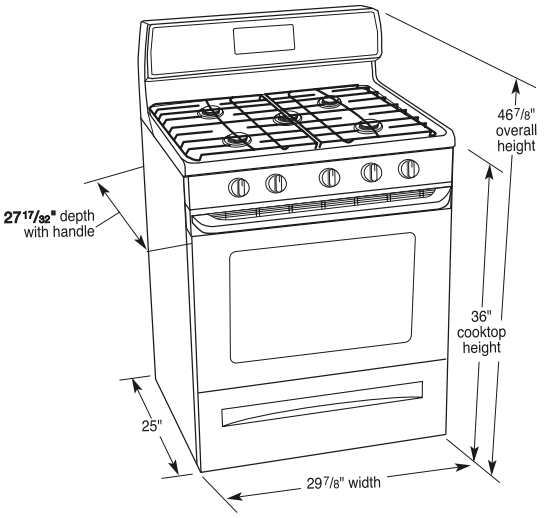

Cut-Out Dimensions

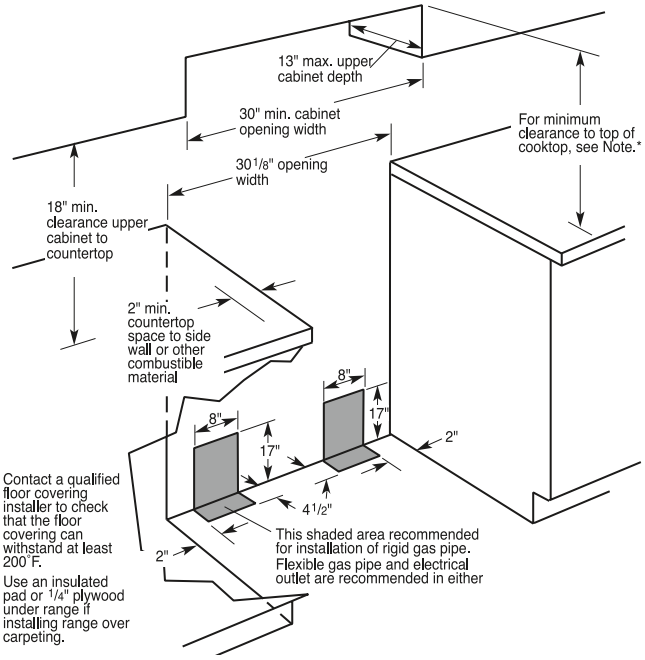
13" max. upper cabinet depth
30" min. cabinet opening width
For minimum clearance to top of cooktop, see Note.*
30 1/8" opening width
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
8"
17"
8"
17"
2"
4 1/2"
2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG381LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe Satin Finish Cast-Iron, In sump Full-Width Grates
- Two Power™ Burners
- AccuSimmer® Burner
- 5.0 cu. ft. Oven
- Recessed Cooktop
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

	Whirlpool®
Model No.	**WFG381LV**
Capacity (cu. ft.)	5.0
Control System	Electronic
Cooktop	
Recessed Cooktop	Full Sump
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Full-Width, In Sump, Cast-Iron
Sealed Burners	Yes
5,000 BTU AccuSimmer® Burner	1
9,500 BTU Burner	1
15,500 BTU Power™ Burner	2
8,000 BTU Middle Burner	1
Oven	
AccuBake® Temperature Management System	Yes
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lock	Yes
Clock and Timer	Yes
Oven Light	Yes/Oven Light Switch
Adjustable Racks	2
Oven Window	EasyView™
Drawer	Storage
Self-Cleaning System	Adjustable Time
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

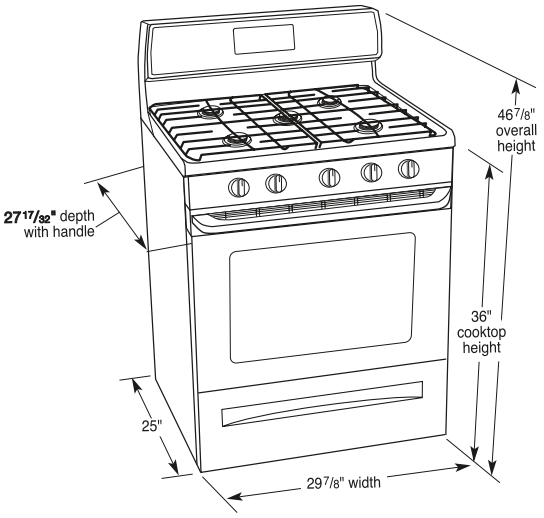

Cut-Out Dimensions

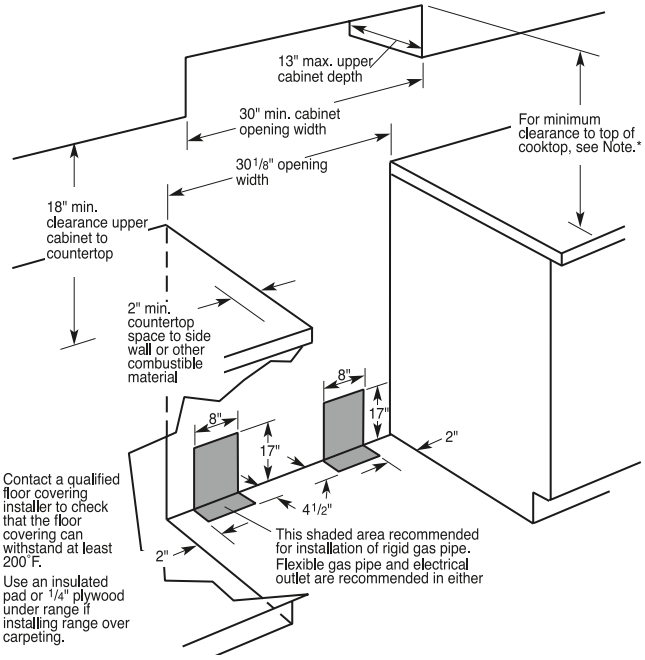
13" max. upper cabinet depth
30" min. cabinet opening width
For minimum clearance to top of cooktop, see Note.*
30 1/8" opening width
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
8"
17"
8"
17"
2"
4 1/2"
2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200˚F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG371LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe Satin Finish Cast-Iron In Sump Full-Width Grates
- Two Power™ Burners
- AccuSimmer® Burner
- 5.0 cu. ft. Oven
- One 5,000 BTU AccuSimmer® Burner, One 9,500 BTU and Two 15,500 BTU Sealed Gas Power™ Burners
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

	Whirlpool®
Model No.	**WFG371LV**
Capacity (cu. ft.)	5.0
Control System	Electronic
Cooktop	
Recessed Cooktop	Full Sump
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Full-Width, In-Sump Cast-Iron
Sealed Burners	Yes
5,000 BTU AccuSimmer® Burner	1
9,500 BTU Burner	1
15,500 BTU Power™ Burner	2
Oven	
AccuBake® Temperature Management System	Yes
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lock	Yes
Clock and Timer	Yes
Oven Light	Automatic
Adjustable Racks	2
Oven Window	EasyView™
Drawer	Storage
Self-Cleaning System	Adjustable Time
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

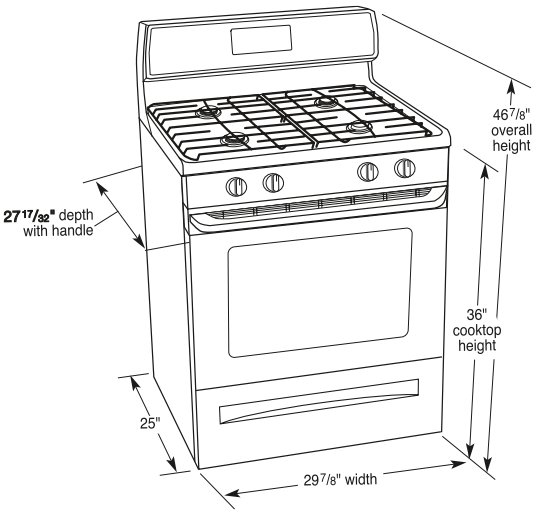

Cut-Out Dimensions

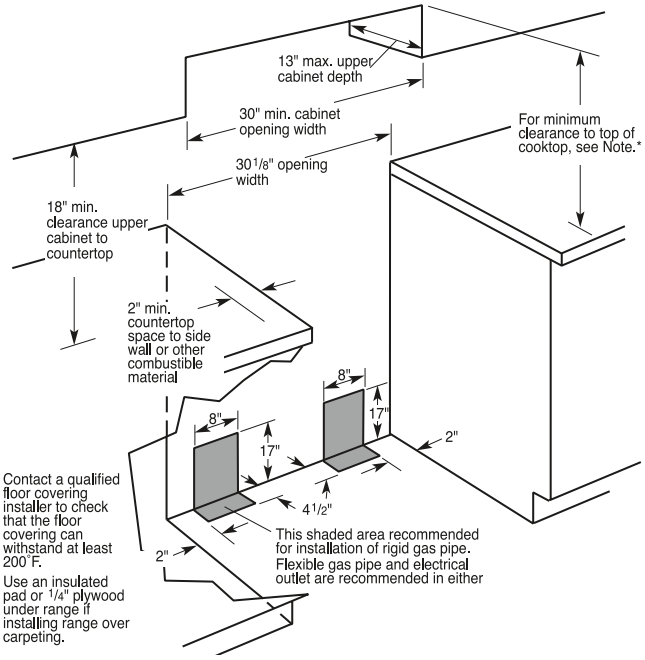
13" max. upper cabinet depth
30" min. cabinet opening width
For minimum clearance to top of cooktop, see Note.*
30 1/8" opening width
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
8"
17"
8"
17"
2"
4 1/2"
2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200˚F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG361LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe, Cast-Iron Grates
- Power™ Burner
- 5.0 cu. ft. Oven
- One 5,000 BTU AccuSimmer® Burner, Two 9,500 BTU, and One 13,500 BTU Sealed Gas Power™ Burners
- Cast-Iron Grates
- AccuBake® Temperature Management System

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S) Universal Silver(D)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

Model No.	WFG361LV
Capacity (cu. ft.)	5.0
Control System	Electronic
Cooktop	
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Cast-Iron
Sealed Burners	Yes
5,000 BTU AccuSimmer® Burner	1
9,500 BTU Burner	2
13,500 BTU Power™ Burner	1
Oven	
AccuBake® Temperature Management System	Yes
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Delay Bake	Yes
Oven Hold Warm	Yes
Custom Broil	Yes
Control Lock	Yes
Clock and Timer	Yes
Oven Light	Automatic
Adjustable Racks	2
Oven Window	EasyView™
Drawer	Storage
Self-Cleaning System	Adjustable Time
Overall Features	
Metal Handle	S

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

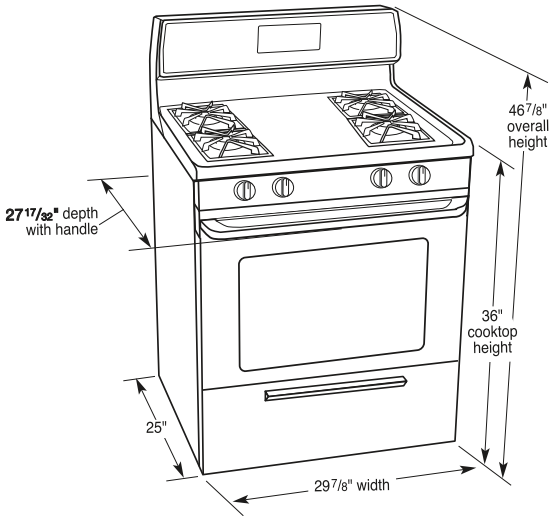

Cut-Out Dimensions

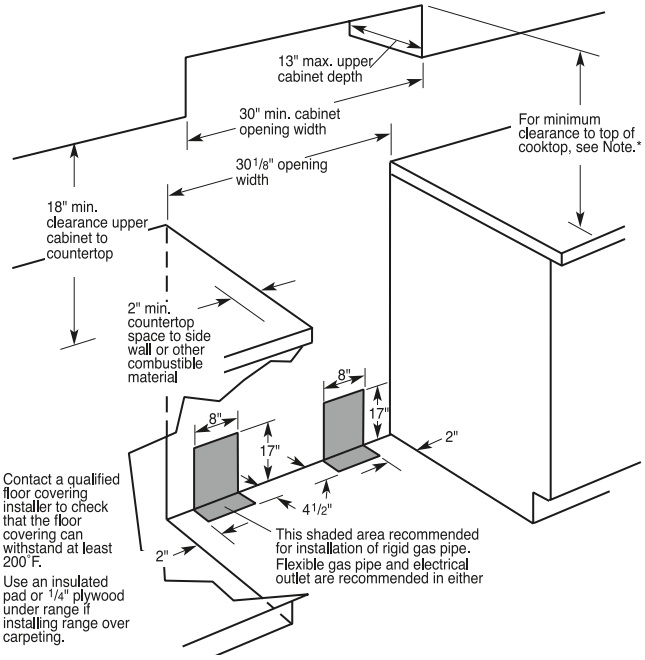
13" max. upper cabinet depth
30" min. cabinet opening width
For minimum clearance to top of cooktop, see Note.*
30 1/8" opening width
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
8"
17"
8"
17"
2"
4 1/2"
2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200˚F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG231LV

KEY FEATURES

- EZ-Clean, Dishwasher-Safe, Cast-Iron Grates
- Center Griddle
- 4.4 cu. ft. Oven
- Three 7,000 BTU, One 8,000 BTU, and One 7,500 BTU Fish Semi Sealed Gas Burners
- Extra-Large, EasyView™ Window
- Broiler Drawer

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

Model No.	WFG231LV
Capacity (cu. ft.)	4.4
Control System	Electronic
Cooktop	
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Cast-Iron
Sealed Burners	Semi Sealed
7,000 BTU Burner	3
7,500 BTU Fish Burner	1
8,000 BTU Burner	1
Center Griddle	Yes
Oven	
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Oven Light	Manual
Adjustable Racks	2
Oven Window	EasyView™
Drawer	Broiler

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

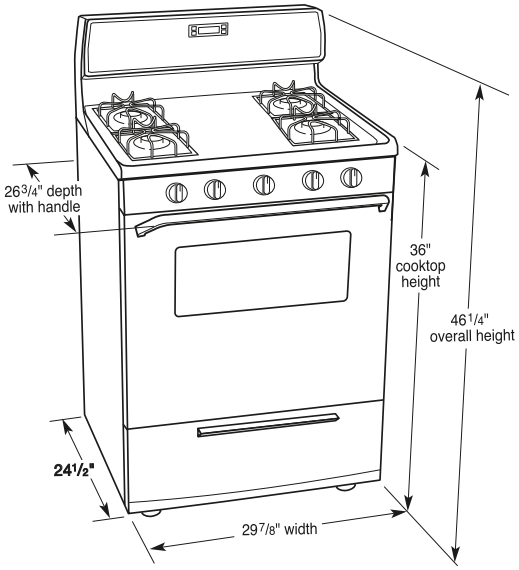

Cut-Out Dimensions

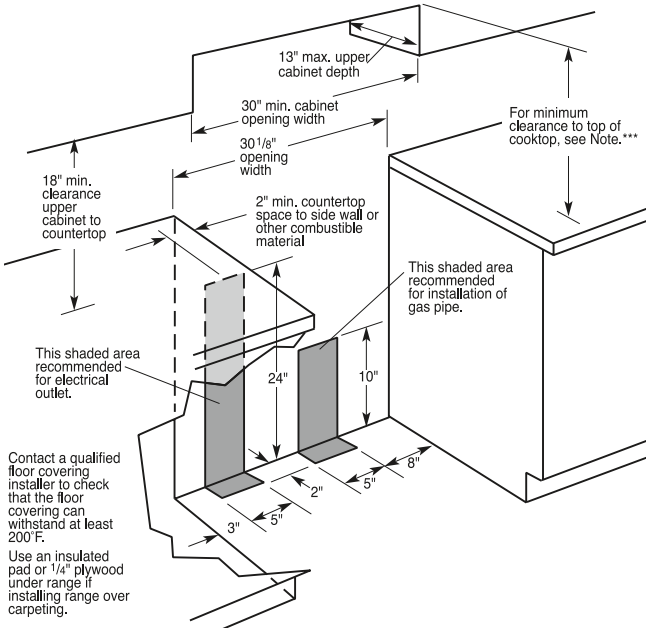
13" max. upper cabinet depth
30" min. cabinet opening width
30 1/8" opening width
For minimum clearance to top of cooktop, see Note.***
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
This shaded area recommended for installation of gas pipe.
This shaded area recommended for electrical outlet.
24"
10"
8"
5"
2"
5"
3"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

This is not a flush-to-cabinet model.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG114SV

KEY FEATURES

- Broiler Drawer
- Upswept Porcelain-on-Steel SpillGuard™ Cooktop
- 4.4 cu. ft. Oven
- One 11,500 BTU and Three 9,500 BTU Sealed Gas Burners
- Steel Grates
- Glass Oven Door with Window

COLORS

White(Q) Biscuit(T) Black(B) White with Black Console(W)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Freestanding Gas Range Features & Specifications

Model No.	WFG114SV
Capacity (cu. ft.)	4.4
Control System	Electronic
Cooktop	
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Grates	Steel
Sealed Burners	Yes
9,500 BTU Burner	3
11,500 BTU Burner	1
Oven	
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Oven Light	Automatic
Adjustable Racks	2
Oven Window	Yes
Drawer	Broiler

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

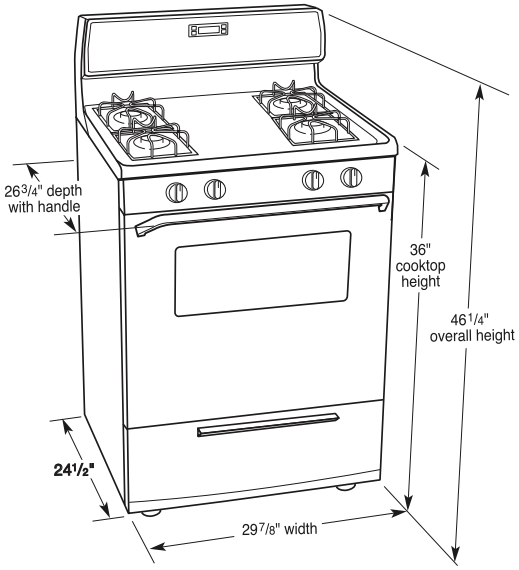

Cut-Out Dimensions

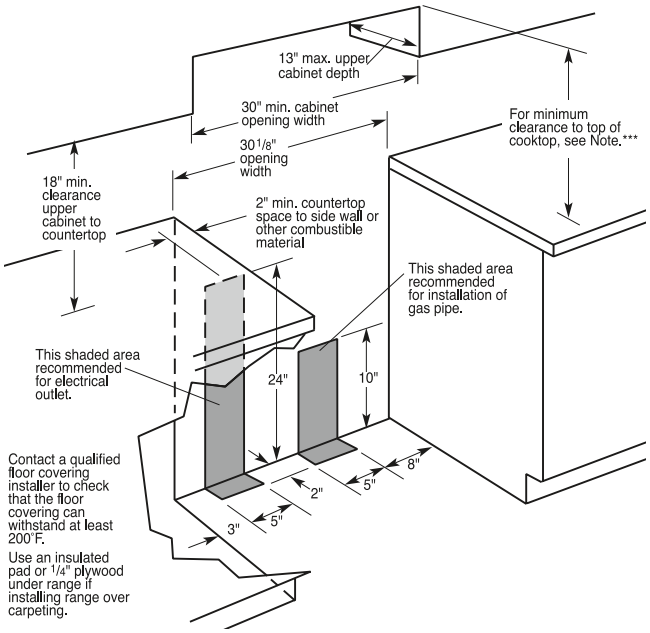
13" max. upper cabinet depth
30" min. cabinet opening width
30 1/8" opening width
For minimum clearance to top of cooktop, see Note.***
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
This shaded area recommended for installation of gas pipe.
This shaded area recommended for electrical outlet.
24"
10"
8"
5"
2"
5"
3"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

This is not a flush-to-cabinet model.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG111SV

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Broiler Compartment
- 4.4 cu. ft. Oven
- Four 9,500 BTU Gas Burners
- Steel Grates
- Glass Oven Door with Window

COLORS

White(Q)

Freestanding Gas Range Features & Specifications

Model No.	WFG111SV
Capacity (cu. ft.)	4.4
Control System	Knob
Cooktop	
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes
Grates	Steel
9,500 BTU Burner	4
Oven	
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Oven Light	Manual
Adjustable Racks	2
Oven Window	Yes
Drawer	Broiler Compartment

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

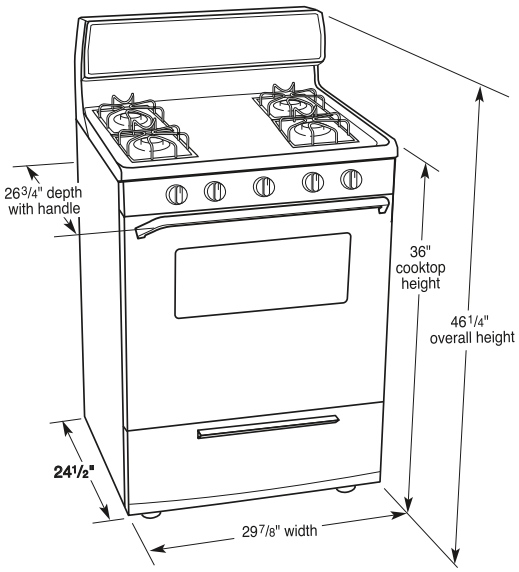

Cut-Out Dimensions

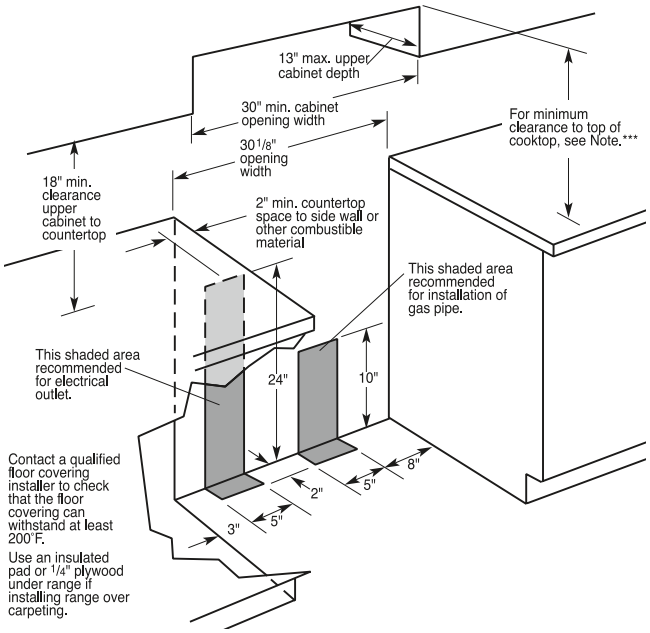
13" max. upper cabinet depth
30" min. cabinet opening width
30 1/8" opening width
For minimum clearance to top of cooktop, see Note.***
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
This shaded area recommended for installation of gas pipe.
This shaded area recommended for electrical outlet.
24"
10"
8"
5"
2"
5"
3"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

This is not a flush-to-cabinet model.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WFG110AV

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Broiler Compartment
- 4.4 cu. ft. Oven
- Four 9,500 BTU Gas Burners
- Steel Grates
- Porcelain-Steel Oven Door

COLORS

White(Q)

Freestanding Gas Range Features & Specifications

Model No.	WFG110AV
Capacity (cu. ft.)	4.4
Control System	Knob
Cooktop	
Upswept, Porcelain SpillGuard™ Cooktop	Yes
Grates	Steel
9,500 BTU Burner	4
Oven	
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500
Adjustable Racks	2
Drawer	Broiler Compartment

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Product Dimensions

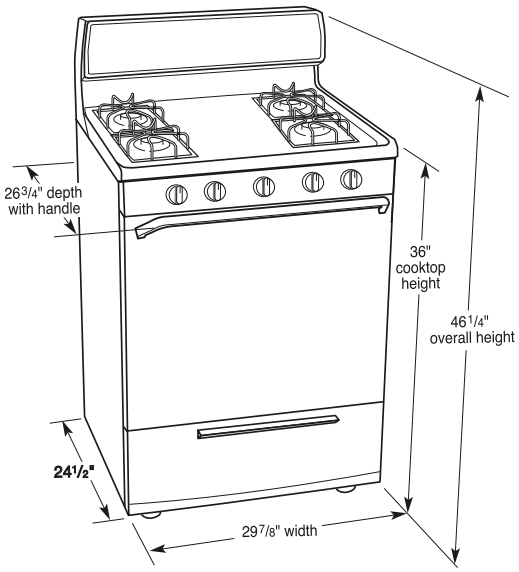

Cut-Out Dimensions

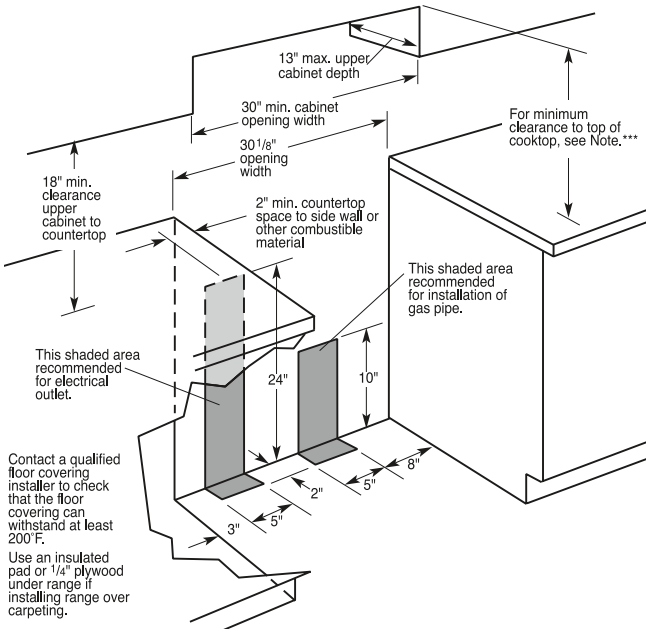
13" max. upper cabinet depth
30" min. cabinet opening width
30 1/8" opening width
For minimum clearance to top of cooktop, see Note.***
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
This shaded area recommended for installation of gas pipe.
This shaded area recommended for electrical outlet.
24"
10"
8"
5"
2"
5"
3"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.

Do not pinch the power supply cord between the range and the wall.

Do not seal range to the side cabinets.

If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.

* NOTE: 24" minimum when bottom of wood or metal cabinet is covered by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

This is not a flush-to-cabinet model.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GW399LXU

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- EZ-Clean, Dishwasher-Safe, Satin Finish In Sump Full-Width Grates
- TimeSavor™ Plus Convection Cooking System
- Power™ Burners
- Large Oven Capacity
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Slide-In Gas Range Features & Specifications

	Whirlpool Gold®
Model No.	**GW399LXU**
Oven	
Temperature Management System	AccuBake®
TimeSavor™ Convection Cooking System	Yes
Capacity (cu. ft.)	4.5
Cleaning System	Self-Clean
Automatic Light	Yes
Light Switch	Touch-Pad
Adjustable Racks	2 Full-Width/1 Split
Rack Guides	5
Sabbath Mode	Yes
Broiler	Waist-High
Glass Door	Yes
Window	Extra Large
Bake Burner BTU/hr. Rating (Nat./LP)	15,500/15,500
Broil Burner BTU/hr. Rating (Nat./LP)	10,000/9,000
Cooktop	
Porcelain-on-Steel SpillGuard™	Yes
Burner Type	Sealed
Ignition	Electronic
Surface Burner BTU/hr. Rating (Nat./LP): Left Rear AccuSimmer® Burner	5,000 BTU
Right Front	16,000 BTU Power™ Burner
Left Front	12,500 BTU Power™ Burner
Right Rear	9,200 BTU
Total Load Gas BTU (Nat./LP):	65,000/58,500
Burner Grates	2-Piece Porcelain-Coated-Full-Width Cast-Iron Q — Grey B/S — Black
Non-Turn Grates	Yes
Lift-Off Control Knobs	Yes
Controls	
Controls	Electronic
General Information	
Storage Drawer	Yes
Anti-Tip Brackets	Yes
Approx. Shipping Weight (lbs.)	239

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Slide-In Gas Range Requirements

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2 ½" (6.4 cm) beyond 24" (61 cm) base cabinet.

Product Dimensions

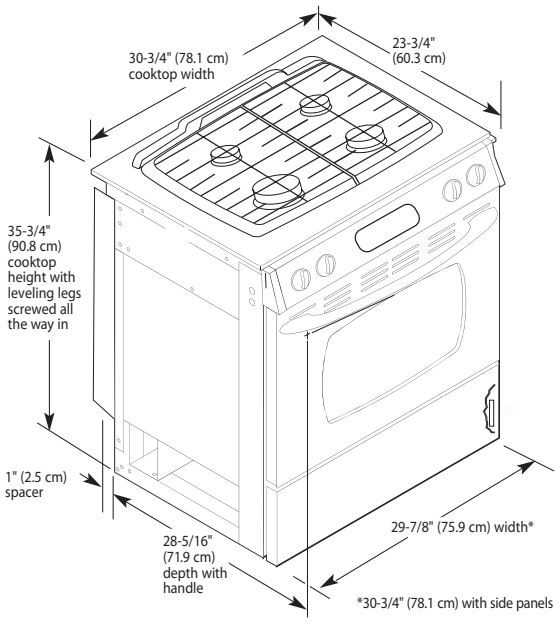
30-3/4" (78.1 cm) cooktop width
23-3/4" (60.3 cm)
35-3/4" (90.8 cm) cooktop height with leveling legs screwed all the way in
1" (2.5 cm) spacer
28-5/16" (71.9 cm) depth with handle
29-7/8" (75.9 cm) width*
*30-3/4" (78.1 cm) with side panels

Cabinet Opening Dimensions

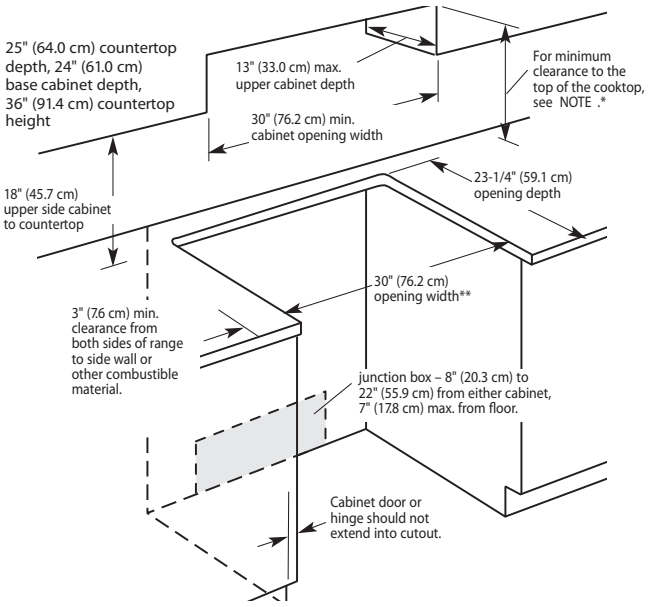
25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth, 36" (91.4 cm) countertop height
13" (33.0 cm) max. upper cabinet depth
For minimum clearance to the top of the cooktop, see NOTE .*
30" (76.2 cm) min. cabinet opening width
18" (45.7 cm) upper side cabinet to countertop
23-1/4" (59.1 cm) opening depth
30" (76.2 cm) opening width**
3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material.
junction box – 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
Cabinet door or hinge should not extend into cutout.

** NOTE: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GW397LXU

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- EZ-Clean, Dishwasher-Safe, Satin Finish In Sump Full-Width Grates
- Power™ Burner
- Large Oven Capacity
- Sabbath Mode
- AccuBake® Temperature Management System

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Slide-In Gas Range Features & Specifications

	Whirlpool Gold®
Model No.	**GW397LXU**
Oven	
Temperature Management System	AccuBake®
Capacity (cu. ft.)	4.5
Cleaning System	Self-Clean
Automatic Light	Yes
Light Switch	Touch-Pad
Adjustable Racks	2 Full-Width
Rack Guides	5
Sabbath Mode	Yes
Broiler	Waist-High
Glass Door	Yes
Window	Extra Large
Bake Burner BTU/hr. Rating (Nat./LP)	15,500/15,500
Broil Burner BTU/hr. Rating (Nat./LP)	10,000/9,000
Cooktop	
Porcelain-on-Steel SpillGuard™	Yes
Burner Type	Sealed
Ignition	Electronic
Surface Burner BTU/hr. Rating (Nat./LP): Left Rear AccuSimmer® Burner	5,000 BTU
Right Front	14,000 BTU Power™ Burner
Left Front	9,200 BTU
Right Rear	9,200 BTU
Total Load Gas BTU (Nat./LP):	65,000/58,500
Burner Grates	2-Piece Porcelain-Coated-Full-Width Cast-Iron B/S — Black Q, T — Grey
Non-Turn Grates	Yes
Lift-Off Control Knobs	Yes
Controls	
Controls	Electronic
General Information	
Storage Drawer	Yes
Anti-Tip Brackets	Yes
Approx. Shipping Weight (lbs.)	239

Optional Accessories

Part #	Description
30-48KITRC	4' gas range connector install kit, kit. Includes a 48 gas connector cord.
W10163349A	LP Gas high altitude conversion kit for elevations about 6500 ft.
W10163727A	A Natural Gas high altitude conversion kit for elevations about 6500ft.

Slide-In Gas Range Requirements

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2 ½" (6.4 cm) beyond 24" (61 cm) base cabinet.

Product Dimensions

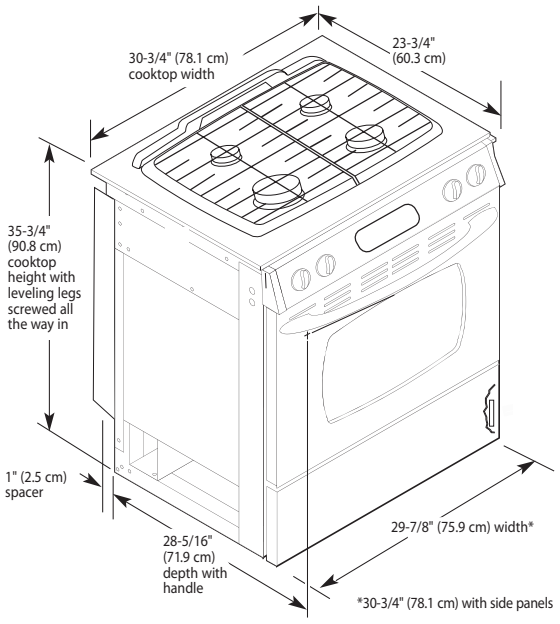
30-3/4" (78.1 cm) cooktop width
23-3/4" (60.3 cm)
35-3/4" (90.8 cm) cooktop height with leveling legs screwed all the way in
1" (2.5 cm) spacer
28-5/16" (71.9 cm) depth with handle
29-7/8" (75.9 cm) width*
*30-3/4" (78.1 cm) with side panels

Cabinet Opening Dimensions

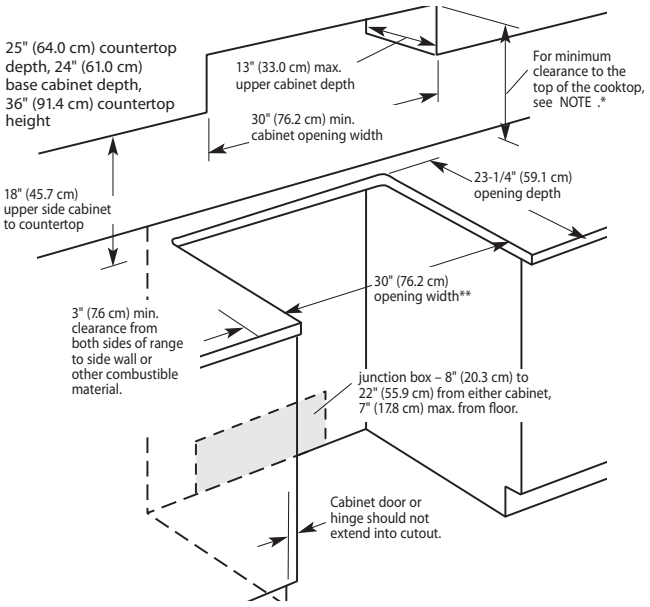
25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth, 36" (91.4 cm) countertop height
13" (33.0 cm) max. upper cabinet depth
For minimum clearance to the top of the cooktop, see NOTE .*
30" (76.2 cm) min. cabinet opening width
18" (45.7 cm) upper side cabinet to countertop
23-1/4" (59.1 cm) opening depth
30" (76.2 cm) opening width**
3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material.
junction box – 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
Cabinet door or hinge should not extend into cutout.

** NOTE: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GY399LXU

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Hidden Bake
- TimeSavor™ Plus Convection Cooking System
- Dual Radiant Elements
- Large Oven Capacity
- AccuBake® Temperature Management System

COLORS

White(Q) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Slide-In Electric Range Features & Specifications

	Whirlpool Gold®
Model No.	**GY399LXU**
Oven	
Convection	TimeSavor™ Plus
Temperature Management System	AccuBake®
Delay Bake	Yes
Capacity (cu. ft.)	4.5
Hidden Bake	Yes
Sabbath Mode	Yes
Cleaning System	Self-Clean
Auto Self-Clean Latch	Yes
Automatic Light	Yes
Light Switch	Touch-Pad
Adjustable Racks	2 Full-Width/ 1 Split
Rack Guides	5
Glass Door	Yes
Window	Extra Large
Cooktop	
Ceramic-Glass CleanTop®	Yes
Surface Elements	(2) 6", (1) 6/9", (1) 9/12" Radiant
Surface Unit Indicator Lights	Yes
General Information	
Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	200

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Slide-In Electric Range Requirements

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

Cabinet opening dimensions shown are for 25" (64 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Product Dimensions

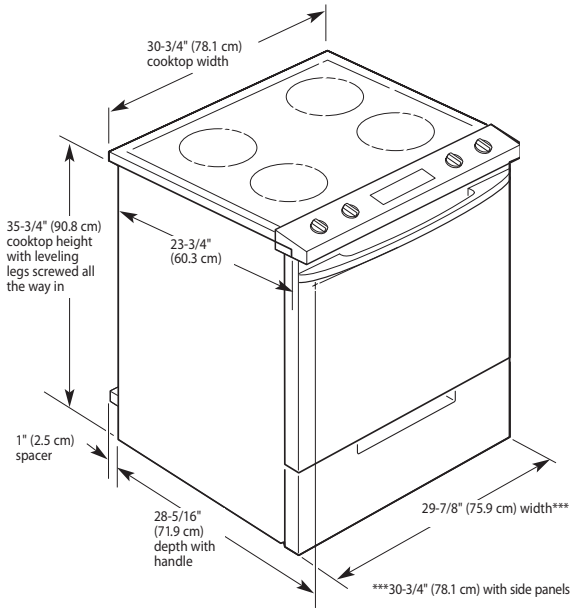
30-3/4" (78.1 cm) cooktop width
35-3/4" (90.8 cm) cooktop height with leveling legs screwed all the way in
23-3/4" (60.3 cm)
1" (2.5 cm) spacer
28-5/16" (71.9 cm) depth with handle
29-7/8" (75.9 cm) width***
***30-3/4" (78.1 cm) with side panels

Cabinet Opening Dimensions

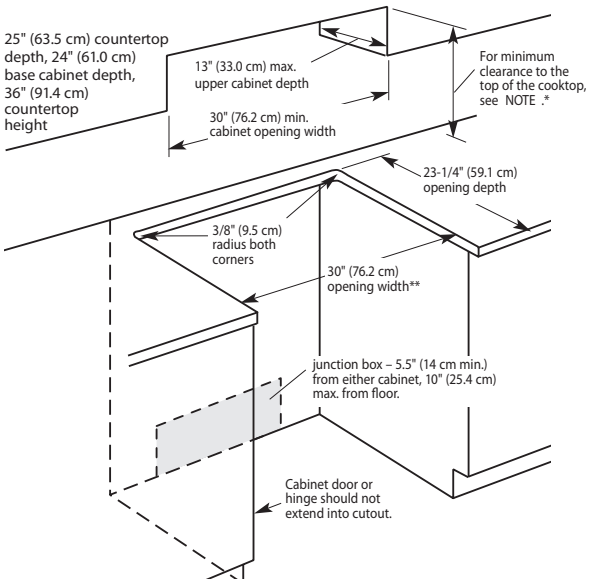
25" (63.5 cm) countertop depth, 24" (61.0 cm) base cabinet depth, 36" (91.4 cm) countertop height
13" (33.0 cm) max. upper cabinet depth
30" (76.2 cm) min. cabinet opening width
For minimum clearance to the top of the cooktop, see NOTE .*
23-1/4" (59.1 cm) opening depth
3/8" (9.5 cm) radius both corners
30" (76.2 cm) opening width**
junction box – 5.5" (14 cm min.) from either cabinet, 10" (25.4 cm) max. from floor.
Cabinet door or hinge should not extend into cutout.

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 2 1/2" (6.4 cm) beyond 24" (61 cm) base cabinet.

** Note: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum, or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool Gold® GY397LXU

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- Sabbath Mode
- Large Oven Capacity
- Two 6" and Two 6"/9" Radiant Elements
- AccuBake® Temperature Management System
- EasyView™ Extra Large Window

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Slide-In Electric Range Features & Specifications

	Whirlpool Gold®
Model No.	**GY397LXU**
Oven	
Temperature Management System	AccuBake®
Delay Bake	Yes
Capacity (cu. ft.)	4.5
Cleaning System	Self-Clean
Sabbath Mode	Yes
Auto Self-Clean Latch	Yes
Automatic Light	Yes
Light Switch	Touch-Pad
Adjustable Racks	2 Full-Width
Rack Guides	5
Glass Door	Yes
Window	Extra Large
Cooktop	
Ceramic-Glass CleanTop®	Yes
Surface Elements	(2) 6", (2) 6/9" Radiant
Surface Unit Indicator Lights	Yes
General Information	
Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	200

Product Dimensions

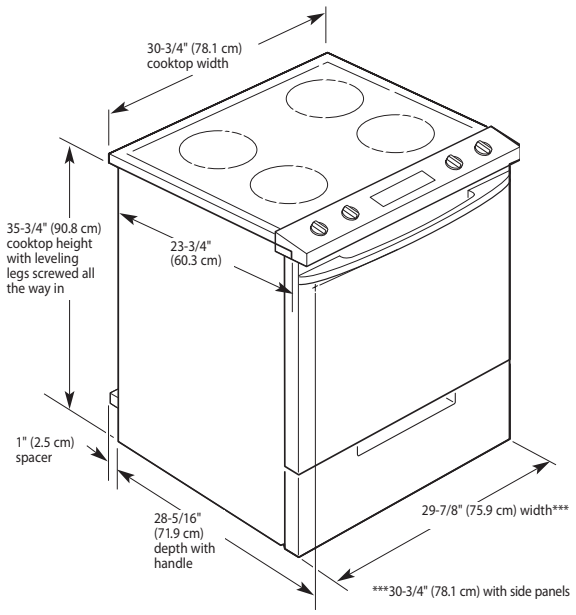

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Cabinet Opening Dimensions

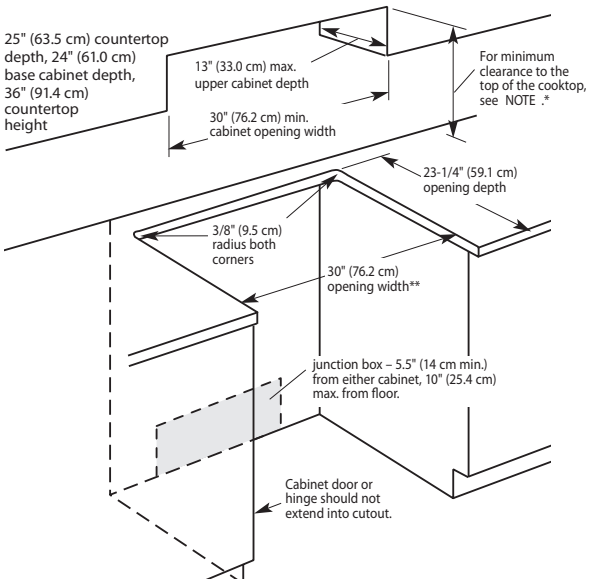

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 2 1/2" (6.4 cm) beyond 24" (61 cm) base cabinet.

** Note: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum, or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Slide-In Electric Range Requirements

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

Cabinet opening dimensions shown are for 25" (64 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® RY160LXT

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- 4.3 cu. ft. Oven
- Two 8" Coil Elements, Two 6" Coil Elements
- Chrome Drip Bowls
- Delay Bake
- Glass Oven Door with EasyView™ Extra-Large Window

COLORS

White(Q) Black(B) Stainless Steel(S)

Slide-In Electric Range Features & Specifications

Model No.	RY160LXT
Oven	
Delay Bake	Yes
Capacity (cu. ft.)	4.3
Cleaning System	Self-Clean
Light Switch	Rocker
Adjustable Racks	2 Full-Width
Rack Guides	5
Glass Door	Yes
Window	Extra Large
Cooktop	
Porcelain-on-Steel Cooktop	Yes
Surface Elements	(2) 6", (2) 8" Coil
Drip Bowls	Chrome
General Information	
Storage Drawer	Yes
Approx. Shipping Weight (lbs.)	200

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp

Slide-In Electric Range Requirements

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

Cabinet opening dimensions shown are for 25" (64 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Product Dimensions

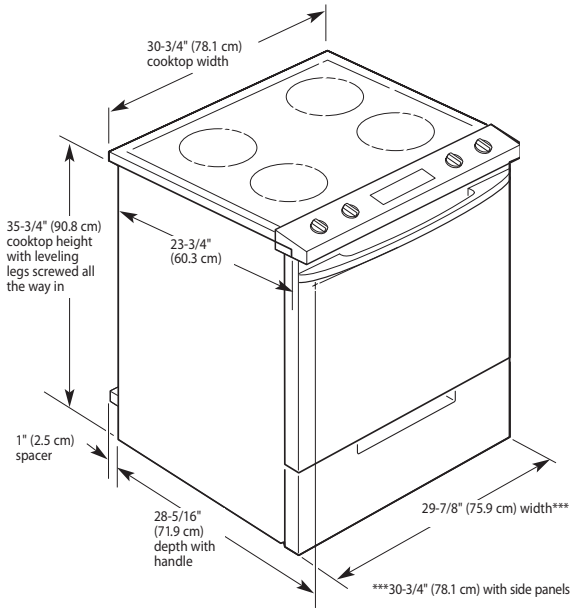

Cabinet Opening Dimensions

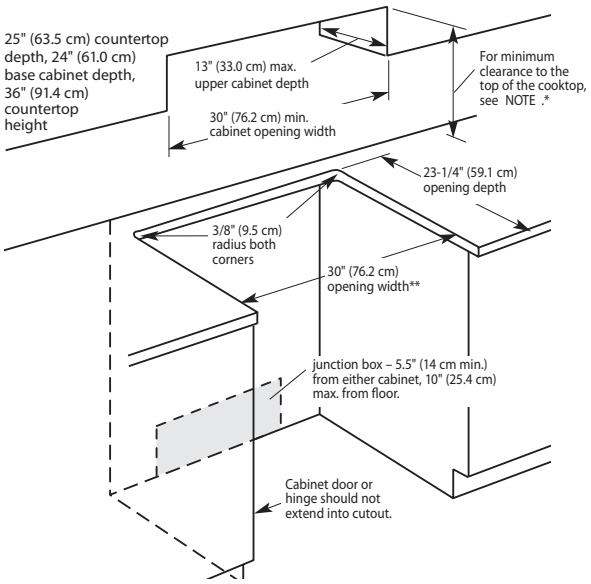

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 2 1/2" (6.4 cm) beyond 24" (61 cm) base cabinet.

** Note: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum, or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

Whirlpool® WDE350LV

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- 4.5 cu. ft. Oven
- Two 6" and Two 6"/9" Radiant Elements
- Delay Bake
- EasyView™ Extra-Large Window
- Self Clean

COLORS

White(Q) Black(B) Stainless Steel(S)

Drop-In Electric Range Features & Specifications

Model No.	WDE350LV
Oven	
Temperature Management System	AccuBake®
Capacity (cu. ft.)	4.5
Cleaning System	Self-Clean
Automatic Light	Yes
Light Switch	Rocker
Adjustable Racks	2 Full-Width
EasyView™ Extra Large Window	Yes
Cooktop	
Ceramic-Glass CleanTop®	Yes
Elements	(2) 6" and (2) 6"/9" Radiant
Controls	
Controls	Electronic
Custom Broil	Yes
General Information	
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 10.8 kw 9.4 kw
Approx. Shipping Weight (lbs.)	182

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp
6" Backsplash Kits	
Stainless Steel	UXA9107AAS
Black	UXA9107AAB
White	UXA9107AAW
Biscuit	UXA9107AAQ
Filler Kits	
Stainless Steel	MK71FILLS
Black	MK71FILLB
White	FILL52 WHT
Biscuit	FILL52 BIS

Product Dimensions

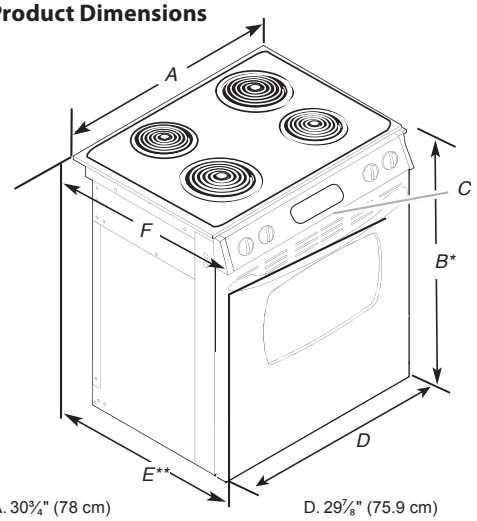

A. 30¾" (78 cm)
B. 27½" (69.9 cm) height to underside of cooktop edge with leveling legs screwed all the way in*
C. Model/serial number plate (located below the electronic control on oven frame)
D. 29⅞" (75.9 cm)
E. 28 5/16" (71.9 cm) from handle to standoff at back of range**
F. 23¾" (60.3 cm) countertop notch to rear of cooktop

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2½" (6.4 cm) beyond 24" (61.0 cm) base cabinet.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

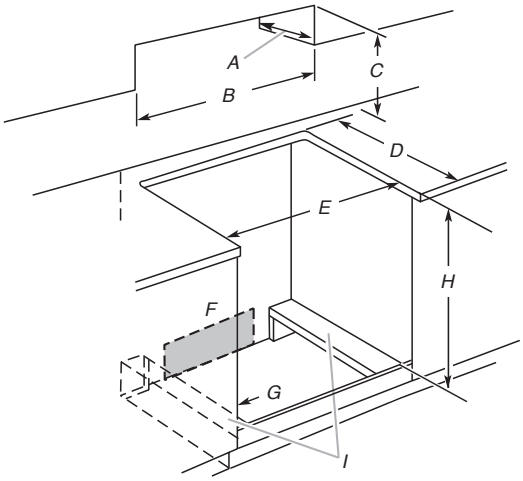

A. 13" (33 cm) upper cabinet depth
B. 30" (76.2 cm) min. opening width
C. For minimum clearance to the top of the cooktop, see NOTE.*
D. 23¼" (58.1 cm) opening depth
E. 30" (76.2 cm) min. opening width
F. Junction box - 5.5" (14 cm) min. from either cabinet, 8¼" (21 cm) max. from floor
G. Cabinet door or hinge should not extend into cutout.
H. 27½" (69.9 cm) top of countertop to support slats
I. 6" (15.2 cm) wide support slat on each side of cutout

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Whirlpool® WDE150LV

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- 4.5 cu. ft. Oven
- Two 6" and Two 8" Coil Elements
- AccuBake® Temperature Management System
- EasyView™ Extra-Large Window
- Frameless Door

COLORS

White(Q) Biscuit(T) Black(B) Stainless Steel(S)

Complete Product Specifications on the back. For all product accessories, please reference the Accessories section.

Drop-In Electric Range Features & Specifications

Model No.	WDE150LV
Oven	
Temperature Management System	AccuBake®
Capacity (cu. ft.)	4.5
Cleaning System	Self-Clean
Automatic Light	Yes
Light Switch	Rocker
Adjustable Racks	2 Full-Width
EasyView™ Extra Large Window	Yes
Cooktop	
Porcelain-on-Steel SpillGuard™	Yes
Elements	(2) 6", (2) 8"
Drip Bowls	Chrome
Controls	
Controls	Electronic
Custom Broil	Yes
General Information	
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 9.7 kw 8.4 kw
Approx. Shipping Weight (lbs.)	160

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp
6" Backsplash Kits	
Stainless Steel	UXA9107AAS
Black	UXA9107AAB
White	UXA9107AAW
Biscuit	UXA9107AAQ
Filler Kits	
Stainless Steel	MK71FILLS
Black	MK71FILLB
White	FILL52 WHT
Biscuit	FILL52 BIS

Product Dimensions

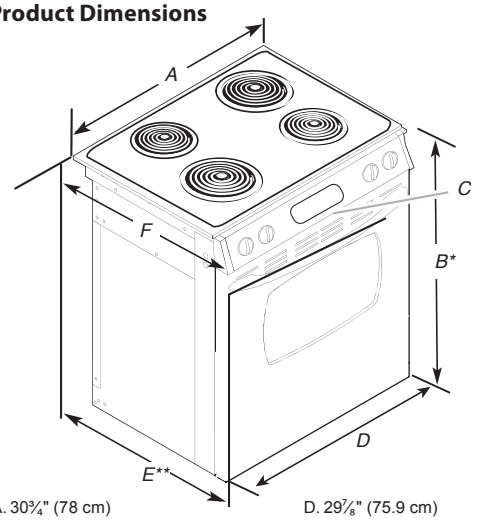

A. 30¾" (78 cm)
B. 27½" (69.9 cm) height to underside of cooktop edge with leveling legs screwed all the way in*
C. Model/serial number plate (located below the electronic control on oven frame)
D. 29⅞" (75.9 cm)
E. 28⁵⁄₁₆" (71.9 cm) from handle to standoff at back of range**
F. 23¾" (60.3 cm) countertop notch to rear of cooktop

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2½" (6.4 cm) beyond 24" (61.0 cm) base cabinet.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

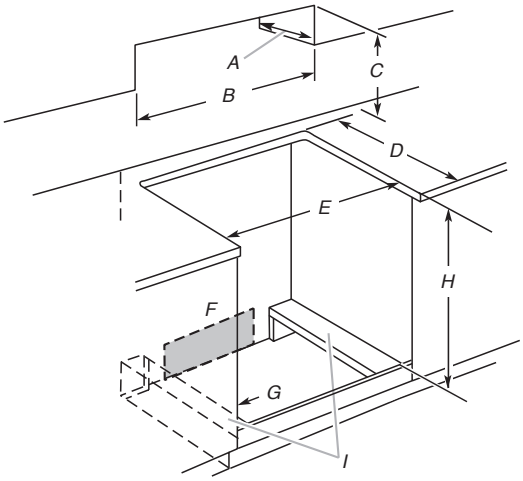

A. 13" (33 cm) upper cabinet depth
B. 30" (76.2 cm) min. opening width
C. For minimum clearance to the top of the cooktop, see NOTE.*
D. 23¼" (58.1 cm) opening depth
E. 30" (76.2 cm) min. opening width
F. Junction box - 5.5" (14 cm) min. from either cabinet, 8¼" (21 cm) max. from floor
G. Cabinet door or hinge should not extend into cutout.
H. 27½" (69.9 cm) top of countertop to support slats
I. 6" (15.2 cm) wide support slat on each side of cutout

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

Whirlpool® WDE101LV

KEY FEATURES

- Meets ADA Push/Pull Force Guidelines
- 4.5 cu. ft. Oven
- Two 6" and Two 8" Coil Elements
- Delay Bake
- EasyView™ Extra-Large Window
- Frameless Door

COLORS

White(Q)

Drop-In Electric Range Features & Specifications

Model No.	WDE101LV
Oven	
Capacity (cu. ft.)	4.5
Cleaning System	Standard
Light Switch	Rocker
Adjustable Racks	2 Full-Width
EasyView™ Extra Large Window	Yes
Cooktop	
Porcelain-on-Steel SpillGuard™	Yes
Elements	(2) 6", (2) 8" Coil
Drip Bowls	Chrome
Controls	
Controls	Electronic
Custom Broil	Yes
General Information	
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 9.1 kw 7.9 kw
Approx. Shipping Weight (lbs.)	160

Optional Accessories

Part #	Description
8171385RC	4' Range Conducts 40 Amp and is a 3-Wire Power Cord (Replaces 8171385RA). Gray.
8171394RC	4' Range Conducts 50 Amp and is a 4-Wire Power Cord (Replaces 8171394RA). Black.
PT220	4' Range Cord, 3-Wire, 40 Amp
PT600	6' Range Power Cord, 4-Wire, 40 Amp
6" Backsplash Kits	
Stainless Steel	UXA9107AAS
Black	UXA9107AAB
White	UXA9107AAW
Biscuit	UXA9107AAQ
Filler Kits	
Stainless Steel	MK71FILLS
Black	MK71FILLB
White	FILL52 WHT
Biscuit	FILL52 BIS

Product Dimensions

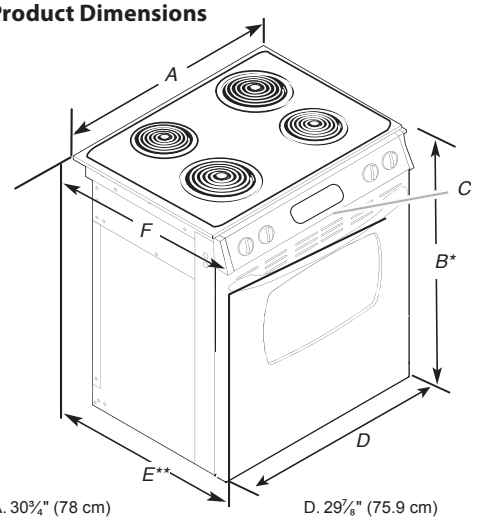

A. 30¾" (78 cm)
B. 27½" (69.9 cm) height to underside of cooktop edge with leveling legs screwed all the way in*
C. Model/serial number plate (located below the electronic control on oven frame)
D. 29⅞" (75.9 cm)
E. 28 5/16" (71.9 cm) from handle to standoff at back of range**
F. 23¾" (60.3 cm) countertop notch to rear of cooktop

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2½" (6.4 cm) beyond 24" (61.0 cm) base cabinet.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

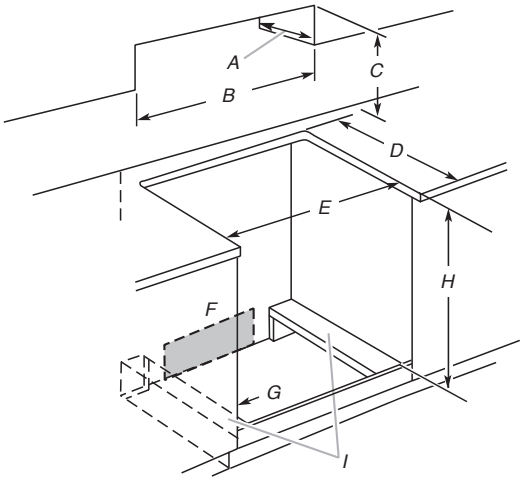

A. 13" (33 cm) upper cabinet depth
B. 30" (76.2 cm) min. opening width
C. For minimum clearance to the top of the cooktop, see NOTE.*
D. 23¼" (58.1 cm) opening depth
E. 30" (76.2 cm) min. opening width
F. Junction box - 5.5" (14 cm) min. from either cabinet, 8¼" (21 cm) max. from floor
G. Cabinet door or hinge should not extend into cutout.
H. 27½" (69.9 cm) top of countertop to support slats
I. 6" (15.2 cm) wide support slat on each side of cutout

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product.
Specifications subject to change without notice.

SINGLE, DOUBLE, & COMBINATION OVENS
FEATURES & SPECIFICATIONS

	Single Ovens				
	Whirlpool Gold®	Whirlpool®		Whirlpool Gold®	Whirlpool®
Model No.	**30" GBS309PV**	**30" RBS307PV**	**30" RBS305PV**	**27" GBS279PV**	**27" RBS277PV**
Features (Upper)					
Capacity (cu. ft.)					
Watts					
SpeedCook Oven, Sizzle Pan With Handle and Quartz Element					
Full & Center Broil					
Hidden Bake					
Convection Cooking System					
Convection Conversion					
Self-Cleaning					
Features (Lower/Single)					
Capacity (cu. ft.)	4.1	4.1	4.1	3.6	3.6
Full & Center Broil	Yes	—	—	Yes	—
Hidden Bake	Yes	—	—	Yes	—
Convection Cooking System	TimeSavor™ Plus	TimeSavor™	—	TimeSavor™ Plus	TimeSavor™
Convection Conversion	Yes	—	—	Yes	—
Self-Cleaning	Yes	Yes	Yes	Yes	Yes
General Oven Features					
AccuBake® Temperature Management System	Yes	Yes	Yes	Yes	Yes
Delay Bake	Yes	Yes	Yes	Yes	Yes
Sabbath Mode	Yes	—	—	Yes	—
Closed Door Broiling	Yes	Yes	Yes	Yes	Yes
Preheat Countdown with Timer	Temperature	Timer	Timer	Temperature	Timer
Mylar® Controls	Yes	Yes	Yes	Yes	Yes
Control Lockout	Yes	Yes	Yes	Yes	Yes
Illuminated Display (Bi-Color)	Yes	Yes	Yes	Yes	Yes
Oven Light(s)	Halogen	Incandescent	Incandescent	Halogen	Incandescent
Flush-to-Cabinet Design	Yes	Yes	Yes	Yes	Yes
Approved for Under-the-Counter Installation	Yes	Yes	Yes	Yes	Yes
Bake Element Watts @ 240/208 Volts	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W
Broil Element Watts @ 240/208 Volts	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W
Oven Cavity Size (in.) 30 inch oven	16 H x 25 W x 17⅝ D	16 H x 25 W x 17⅝ D	16 H x 25 W x 17⅝ D	16 H x 22 W x 17⅝ D	16 H x 22 W x 17⅝ D
General Information					
Total Connected Load (kwh) @ 240 Volts @ 208 Volts	 4.7 Kw 3.5 Kw	 5 Kw 3.8 Kw	 5 Kw 3.8 Kw	 4.7 Kw 3.5 Kw	 5 Kw 3.8 Kw
Circuit (amps)	30 Amp.	30 Amp.	30 Amp.	30 Amp.	30 Amp.
Approx. Shipping Weight (lbs.)	139	139	139	134	134
Metal Handle	All Colors	All Colors	All Colors	All Colors	All Colors
Colors*	Q, B, S	Q, B, S	Q, B, T, S	Q, B, S	Q, B, S

* Q – White, T – Biscuit, B – Black and S – Stainless Steel
** Maintains current oven styling. Plastic handle on all colors.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

SINGLE, DOUBLE, & COMBINATION OVENS FEATURES & SPECIFICATIONS

	Single Ovens		Double Ovens		
	Whirlpool®		Whirlpool Gold®	Whirlpool®	
Model No.	**27" RBS275PV**	**24" RBS245PR****	**30" GBD309PV**	**30" RBD307PV**	**30" RBD305PV**
Features (Upper)					
Capacity (cu. ft.)			4.1	4.1	4.1
Watts					
SpeedCook Oven, Sizzle Pan With Handle and Quartz Element			—	—	—
Full & Center Broil			Yes	—	—
Hidden Bake			Yes	—	—
Convection Cooking System			TimeSavor™ Plus	TimeSavor™	—
Convection Conversion			Yes	—	—
Self-Cleaning			Yes	Yes	Yes
Features (Lower/Single)					
Capacity (cu. ft.)	3.6	3.1	4.1	4.1	4.1
Full & Center Broil	—	—	Yes	—	—
Hidden Bake	—	—	Yes	—	—
Convection Cooking System	—	—	—	—	—
Convection Conversion	—	—	—	—	—
Self-Cleaning	Yes	Yes	Yes	Yes	—
General Oven Features					
AccuBake® Temperature Management System	Yes	Yes	Yes	Yes	Yes
Delay Bake	Yes	Yes	Yes	Yes	Yes
Sabbath Mode	—	—	Yes	—	—
Closed Door Broiling	Yes	Yes	Yes	Yes	Yes
Preheat Countdown with Timer	Timer	Timer	Temperature	Timer	Timer
Mylar® Controls	Yes	Yes	Yes	Yes	Yes
Control Lockout	Yes	Yes	Yes	Yes	Yes
Illuminated Display (Bi-Color)	Yes	Yes	Yes	Yes	Yes
Oven Light(s)	Incandescent	Incandescent	Halogen	Incandescent	Incandescent
Flush-to-Cabinet Design	Yes	Yes	Yes	Yes	Yes
Approved for Under-the-Counter Installation	Yes	Yes	—	—	—
Bake Element Watts @ 240/208 Volts	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W
Broil Element Watts @ 240/208 Volts	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W
Oven Cavity Size (in.) 30 inch oven	16 H x 22 W x 17⅝ D	16 H x 19 W x 17⅝ D	16 H x 25 W x 17⅝ D	16 H x 25 W x 17⅝ D	16 H x 25 W x 17⅝ D
General Information					
Total Connected Load (kwh) @ 240 Volts @ 208 Volts	 5 Kw 3.8 Kw	 5 Kw 3.8 Kw	 7.7 Kw 5.8 Kw	 8 Kw 6 Kw	 8 Kw 6 Kw
Circuit (amps)	30 Amp.	30 Amp.	40 Amp.	40 Amp.	40 Amp.
Approx. Shipping Weight (lbs.)	134	126	238	238	238
Metal Handle	All Colors	—	All Colors	All Colors	All Colors
Colors*	Q, B, T, S	Q, B, T, S	Q, B, S	Q, B, S	Q, B, T, S

* Q – White, T – Biscuit, B – Black and S – Stainless Steel
** Maintains current oven styling. Plastic handle on all colors.

Double Ovens				Combination Ovens		
Whirlpool Gold®	**Whirlpool®**			**Whirlpool Gold®**	**Whirlpool®**	
27" GBD279PV	**27" RBD277PV**	**27" RBD275PV**	**24" RBD245PR****	**30" GSC309PV**	**30" RMC305PV**	**27" RMC275PV**
				SpeedCook	Microwave	Microwave
3.6	3.6	3.6	3.1	1.4	1.4	1.4
				900	900	900
—	—	—	—	Yes	—	—
Yes	—	—	—	—	—	—
Yes	—	—	—	—	—	—
TimeSavor™ Plus	TimeSavor™	—	—	TimeSavor™ Plus	—	—
Yes	—	—	—	—	—	—
Yes	Yes	Yes	Yes	—	—	—
3.6	3.6	3.6	3.1	4.1	4.1	3.6
Yes	—	—	—	Yes	—	—
Yes	—	—	—	Yes	—	—
—	—	—	—	TimeSavor™ Plus	—	—
—	—	—	—	Yes	—	—
Yes	Yes	—	—	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Lower	Lower	Lower
Yes	Yes	Yes	Yes	Lower	Lower	Lower
Yes	—	—	—	Yes	—	—
Yes	Yes	Yes	Yes	Lower	Lower	Lower
Temperature	Timer	Timer	Timer	Temperature	Timer	Timer
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes	Yes	Yes	Yes
Halogen	Incandescent	Incandescent	Incandescent	Halogen	Incandescent	Incandescent
Yes	Yes	Yes	Yes	Yes	Yes	Yes
—	—	—	—	—	—	—
2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W	2000W/1500W
3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W	3000W/2250W
16 H x 22 W x 17⅝ D	16 H x 22 W x 17⅝ D	16 H x 22 W x 17⅝ D	16 H x 19 W x 17⅝ D	16 H x 25 W x 17⅝ D	16 H x 25 W x 17⅝ D	16 H x 22 W x 17⅝ D
7.7 Kw 5.8 Kw	8 Kw 6 Kw	8 Kw 6 Kw	8 Kw 6 Kw	9.2 Kw 8 Kw	7 Kw 5.8 Kw	7 Kw 5.8 Kw
40 Amp.	40 Amp.	40 Amp.	40 Amp.	40 Amp.	40 Amp.	40 Amp.
230	230	230	222	227	227	221
All Colors	All Colors	All Colors	—	All Colors	All Colors	All Colors
Q, B, S	Q, B, S	Q, B, T, S	Q, B, T, S	Q, B, S	Q, B, T, S	Q, B, T, S

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

SINGLE, DOUBLE, & COMBINATION OVEN DIMENSIONS

	Cutout Dimensions				Product Dimensions			
	Height	Width	Depth	Bottom of Cutout to Floor	Overall Height	Overall Width	Overall Depth*	Distance Between Oven/ Microwave H
Oven Size/Type	A	B	C	D	E	F	G	
24" Single	27 ¾	22 ½	23 ¼	32	29	23 ¾	26	3 min.
24" Single Undercounter	27 ¾	22 ½	23 ¼	5 ¼/ 4 ⅝**	29	23 ¾	26	—
27" Single	27 ¾	25 ½	23 ¼	32	29	26 ¾	26	3 min.
27" Single Undercounter	27 ¾	25 ½	23 ¼	5 ¼/ 4 ⅝**	29	26 ¾	26	—
30" Single	27 ¾	28 ½	23 ¼	32	29	29 ¾	26	3 min.
30" Single Undercounter	27 ¾	28 ½	23 ¼	5 ¼/ 4 ⅝**	29	29 ¾	26	—
24" Double	49 ¾	22 ½	23 ¼	14 ¾	51	23 ¾	26	—
27" Double	49 ¾	25 ½	23 ¼	14 ¾	51	26 ¾	26	—
30" Double	49 ¾	28 ½	23 ¼	14 ¾	51	29 ¾	26	—
27" Combo	41 ¼	25 ½	23 ¼	19 ¼	42 ⅜	26 ¾	26	—
30" Combo	41 ¼	28 ½	23 ¼	19 ¼	42 ⅜	29 ¾	26	—

* Including handle.
** Without cooktop/with cooktop.
All dimensions are shown in inches.
NOTE: Top of cutout to cabinet door equals 1 inch. Bottom of cutout to cabinet door equals 1 ½ inches.

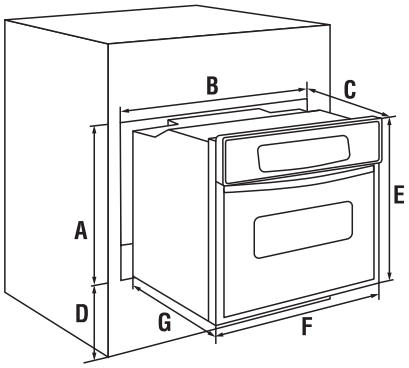

Single Wall Oven

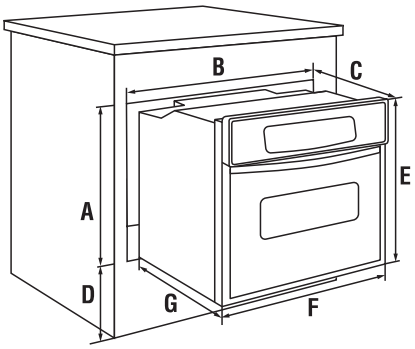

Single Undercounter Oven

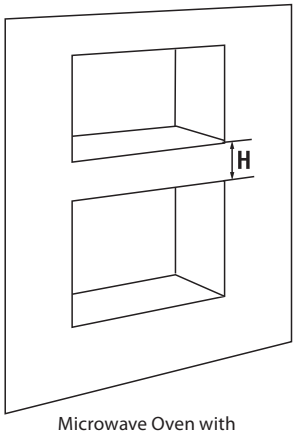

Microwave Oven with Single Oven Below

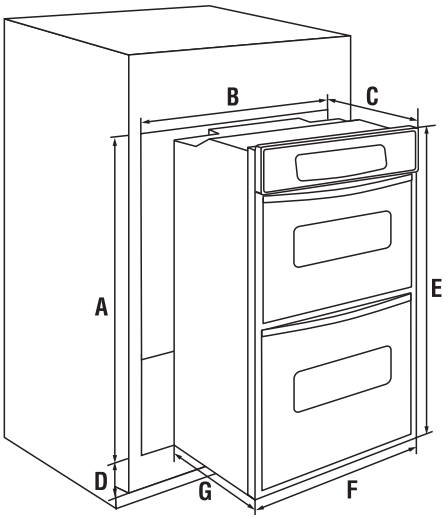

Double Oven

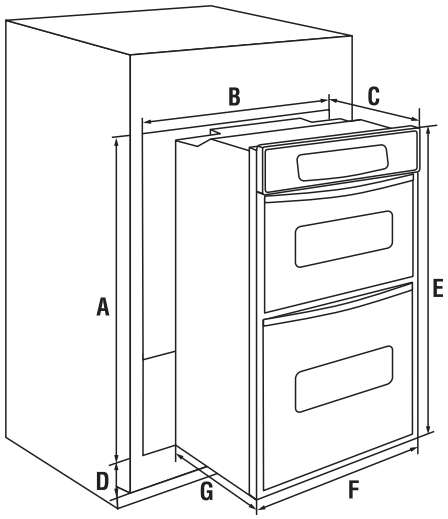

Combination Oven

OVEN FILLER KIT

Filler kits are available for customers purchasing a new Whirlpool® single, double, or combination oven to replace an existing Whirlpool® oven. Not all ovens require a filler kit. If a configuration is not listed, it does not require a kit.

	30" Single	30" Double	27" Combination	30" Combination
White	—	4378948	4378951	4378945
Biscuit	8171648	8171649	—	8171650
Black	4378941	4378947	4378950	4378944

ELECTRIC COOKTOP FEATURES & SPECIFICATIONS

Model No.	Whirlpool Gold® 36" GJC3655R	Whirlpool Gold® 36" GJC3654R	Whirlpool Gold® 36" GJC3634R	Whirlpool Gold® 30" GJC3055R	Whirlpool Gold® 30" GJC3054R	Whirlpool Gold® 30" GJD3044R
Cooktop						
Ceramic-Glass Cooktop	Yes	Yes	Yes	Yes	Yes	Yes
Porcelain-on-Steel Cooktop	—	—	—	—	—	—
Surface Units	Radiant	Radiant	Radiant	Radiant	Radiant	Radiant
Right Front	6"	6"	6"	6"	6"	6"
Left Front	6/9" Dual	6/9" Dual	7" Bridge	6/9" Dual	6/9" Dual	6/9" Dual
Right Rear	7"	7"	6"	5/8" Dual	5/8" Dual	5/8" Dual
Left Rear	6"	6"	7"	7"	6"	6"
Center	5/8" Dual	5/8" Dual	6/9" Dual	—	—	—
Warm Zone 5th Element	Yes	Yes	Yes	—	—	—
AccuSimmer® System Element	—	Yes	Yes	—	Yes	—
Downdraft Vent System	—	—	—	—	—	Yes
Infinite-Heat Controls	Yes	Yes	Yes	Yes	Yes	Yes
Hot-Surface Indicator Light	Yes	Yes	Yes	Yes	Yes	Yes
Power-On Light	No	No	No	No	No	No
Chrome Drip Pans	—	—	—	—	—	—
Lift-Off Control Knobs	—	Yes	Yes	—	Yes	Yes
General Information						
Total Connected Load (kwh) @ 240 Volts @ 208 Volts @ 120 Volts	 8.1 6.0 —	 8.1 6.0 —	 8.1 6.0 —	 8.1 6.0 —	 8.1 6.0 —	 7.2 5.4 —
Approval Over Single Oven	Yes	Yes	Yes	Yes	Yes	—
Approval with Downdraft	Yes	Yes	Yes	Yes	Yes	—
Approx. Shipping Wt. (lbs.)	40	40	40	35	35	57
Color Availability*	B, S	B, S	P, B, S	P, B, S	P, B, S	B

Model No.	Whirlpool Gold® 30" GJC3034R	Whirlpool® 30" RCC3024R	Whirlpool® 30" RCS3014R	Whirlpool® 30" RCS3004R	Whirlpool® 2-Element 21" RCS2012R	Whirlpool® 2-Element 21" RCS2002R
Cooktop						
Ceramic-Glass Cooktop	Yes	Yes	—	—	—	—
Porcelain-on-Steel Cooktop	—	—	Yes**	Yes**	Yes**	Yes**
Surface Units	Radiant	Radiant	Hi-Speed Coil	Coil	Hi-Speed Coil	Coil
Right Front	6"	6"	8"	8"	8"	8"
Left Front	7" Bridge	9"	6"	6"	6"	6"
Right Rear	6/9" Dual	7"	6"	6"	—	—
Left Rear	7"	6"	8"	8"	—	—
Center	—	—	—	—	—	—
Warm Zone 5th Element	—	—	—	—	—	—
AccuSimmer® System Element	Yes	—	—	—	—	—
Downdraft Vent System	—	—	—	—	—	—
Infinite-Heat Controls	Yes	Yes	Yes	Yes	Yes	Yes
Hot-Surface Indicator Light	Yes	Yes	—	—	—	—
Power-On Light	No	No	Yes	Yes	Yes	Yes
Chrome Drip Pans	—	—	Yes	Yes	Yes	Yes
Lift-Off Control Knobs	Yes	Yes	Yes	Yes	Yes	Yes
General Information						
Total Connected Load (kwh) @ 240 Volts @ 208 Volts @ 120 Volts	 8.1 6.0 —	 6.7 5.0 —	 7.2 5.4 —	 6.7 5.0 —	 3.4 2.5 —	 — — 2.4
Approval Over Single Oven	Yes	Yes	Yes	Yes	—	—
Approval with Downdraft	Yes	Yes	Yes	Yes	—	—
Approx. Shipping Wt. (lbs.)	35	35	35	35	18	18
Color Availability*	P, C, B, S	Q, T, B	Q, B, S	S	S	S

* Q – White-on-White, P – Pure White, T – Biscuit-on-Biscuit, C – Pure Biscuit, B – Black-on-Black and S – Stainless Steel
** Stainless model features stainless steel cooktop.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

ELECTRIC COOKTOP DIMENSIONS

30" and 36" Ceramic-Glass Models
RCC3024R, GJC3034R, GJC3054R, GJC3055R,
GJC3634R, GJC3654R and GJC3655R

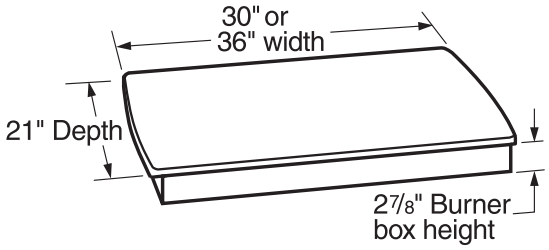

CUT-OUT DIMENSIONS FOR CERAMIC-GLASS MODELS

Model No.	A	B
RCC3024R	29 ½	20 ½
GJC3034R	29 ½	20 ½
GJC3634R	35 ½	20 ½
GJC3054R	29 ½	20 ½
GJC3654R	35 ½	20 ½
GJC3055R	29 ½	20 ½
GJC3655R	35 ½	20 ½

30" or 36" models require a 30" minimum base cabinet. If cabinet has a drawer, a 4" depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. All dimensions are shown in inches.

30" Coil Models
RCS3014R and RCS3004R

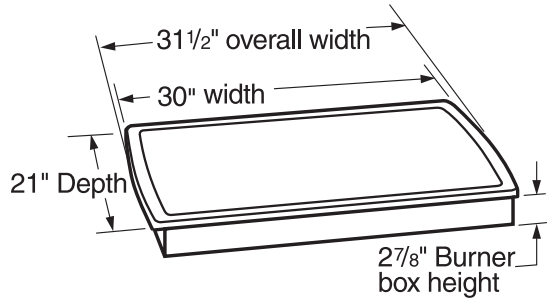

CUT-OUT DIMENSIONS FOR COIL MODELS

Model No.	A	B
RCS2002R	18 5/8	15 ½
RCS2012R	18 5/8	15 ½
RCS3004R	28 7/8	18 5/8
RCS3014R	28 7/8	18 5/8

21" models require 24" base cabinet; 30" and 36" models require a 30" minimum base cabinet. If cabinet has a drawer, a 4" depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. All dimensions are shown in inches.

21" Coil Models
RCS2012R and RCS2002R

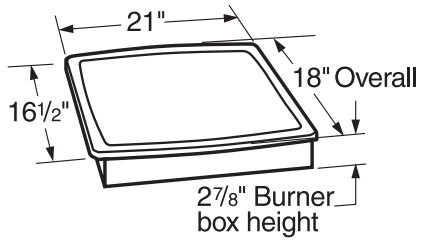

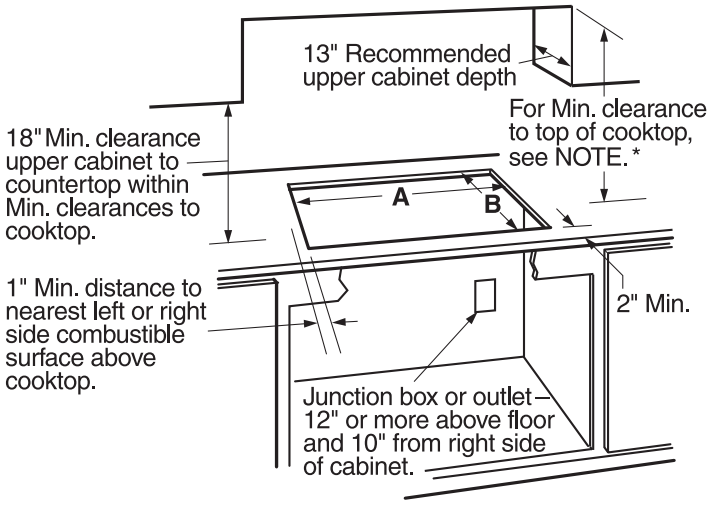

Do not seal cooktop to countertop.

* Note: 24" (61 cm) min. clearance if bottom of wood or metal cabinet is protected by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper. 30" (76.2 cm) min. clearance between top of cooking platform and bottom of unprotected wood or metal cabinet.

Important note on base cabinet construction:
After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the burner box. To avoid this modification, use a base cabinet having side walls wider than the cutout.

Cutout dimensions have not changed from previous Whirlpool Gold® Electric Cooktops.

GAS COOKTOP FEATURES & SPECIFICATIONS

	Downdraft Modular	Whirlpool Gold®			Whirlpool®
Model No.	**30" SC8720ED**	**36" GLS3675V**	**36" GLS3665R**	**36" GLT3657R**	**36" SCS3617R**
Cooktop					
Stainless Steel Cooktop	—	Yes	Yes	—	—
Tempered-Glass Cooktop	—	—	—	Yes	—
Porcelain-on-Steel Cooktop	Yes	—	—	—	Yes**
Burner Type	Open	Sealed	Sealed	Sealed	Sealed
AccuSimmer® System Burner	—	—	—	Yes	—
Ignition	Pilot-Light	Electronic	Electronic	Electronic	Electronic
Auto Reignition	—	—	Yes	—	—
Burner BTU/hr. Rating: Right Front	10,000	6,000	9,000	12,500	5,000
Left Front	Open Bay	15,000	12,000	12,500	12,500
Right Rear	10,000	12,500	12,000	9,100	12,500
Center Rear	—	9,000	15,000	6,000	—
Left Rear	Open Bay	9,000	9,000	6,000	9,100
Downdraft Vent System	Yes	—	—	—	—
Porcelain-Coated Cast-Iron Grates	—	Yes	Yes	Yes	Yes
Recessed Grates	—	—	Yes	—	—
Non-Turn Grates	Yes	Yes	Yes	Yes	Yes
Lift-Off Control Knobs	Yes	Yes	Yes	Yes	Yes
General Information					
LP Conversion Kit Included	—	Yes	Yes	Yes	Yes
Approval Over Single Oven	—	Yes	—	Yes	Yes
Approval with Downdraft	—	Yes	—	Yes	Yes
Approx. Shipping Weight (lbs.)	61	53	72	47	44
Color Availability*	B	S	S	Q, B	Q, B, S

	Whirlpool Gold®			Whirlpool®
Model No.	**30" GLS3074V**	**30" GLS3064R**	**30" GLT3057R**	**30" SCS3017R**
Cooktop				
Stainless Steel Cooktop	Yes	Yes	—	—
Tempered-Glass Cooktop	—	—	Yes	—
Porcelain-on-Steel Cooktop	—	—	—	Yes**
Burner Type	Sealed	Sealed	Sealed	Sealed
AccuSimmer® System Burner	—	—	Yes	—
Ignition	Electronic	Electronic	Electronic	Electronic
Auto Reignition	—	Yes	—	—
Burner BTU/hr. Rating: Right Front	6,000	9,000	12,500	5,000
Left Front	15,000	15,000	12,500	12,500
Right Rear	12,500	12,000	6,000	12,500
Center Rear	—	—	—	—
Left Rear	9,000	9,000	9,100	9,100
Downdraft Vent System	—	—	—	—
Porcelain-Coated Cast-Iron Grates	Yes	Yes	Yes	Yes
Recessed Grates	—	Yes	—	—
Non-Turn Grates	Yes	Yes	Yes	Yes
Lift-Off Control Knobs	Yes	Yes	Yes	Yes
General Information				
LP Conversion Kit Included	Yes	Yes	Yes	Yes
Approval Over Single Oven	Yes	—	Yes	Yes
Approval with Downdraft	Yes	—	Yes	Yes
Approx. Shipping Weight (lbs.)	57.5	60	43	40
Color Availability*	S	S	Q, B	Q, T, B, S

* Q – White-on-White, T – Biscuit-on-Biscuit, B – Black-on-Black and S – Stainless Steel
** Stainless model features stainless steel cooktop

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

GAS COOKTOP DIMENSIONS

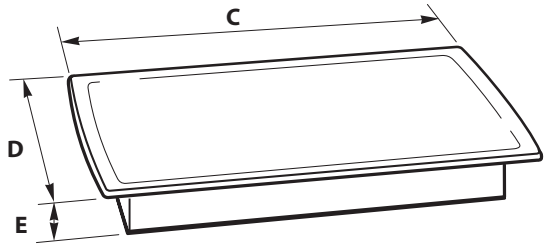

Cooktop Model	Cutout Width A	Cutout Depth B	Overall Width C	Depth D	Burner Box Height E
SCS3017R	29	19	31 7/16	21 1/8	2 7/8
SCS3617R	35 1/4	19	37 9/16	21 1/8	2 7/8
GLT3057R	29	19	30 5/16	21 1/8	2 7/8
GLT3657R	35 1/4	19	36 5/16	21 1/8	2 7/8
GLS3064R	29 3/8	19 1/2	30	20 1/8	2 27/32
GLS3665R	35 3/8	19 1/2	36	20 1/8	2 27/32
GLS3074V	29	19	31 7/16	21 1/4	2 7/8
GLS3675V	35 1/4	19	37 9/16	21 1/4	2 7/8

All dimensions are shown in inches. Note: Dimensions **A** and **B** below.

CUTOUT DIMENSIONS

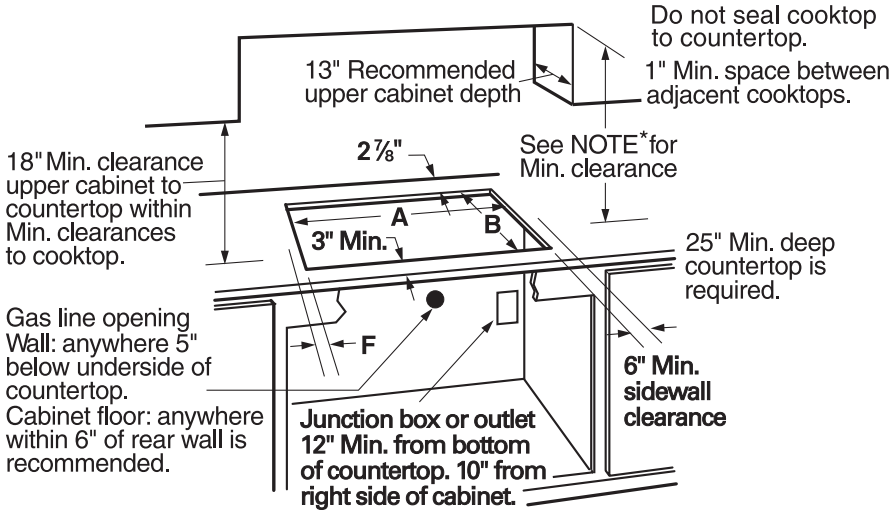
Do not seal cooktop to countertop.
13" Recommended upper cabinet depth
1" Min. space between adjacent cooktops.
2 7/8"
See NOTE* for Min. clearance
18" Min. clearance upper cabinet to countertop within Min. clearances to cooktop.
A
B
3" Min.
25" Min. deep countertop is required.
Gas line opening Wall: anywhere 5" below underside of countertop.
Cabinet floor: anywhere within 6" of rear wall is recommended.
F
6" Min. sidewall clearance
Junction box or outlet 12" Min. from bottom of countertop. 10" from right side of cabinet.

* Note: 24" (61 cm) min. clearance if bottom of wood or metal cabinet is protected by not less than ¼" (0.6 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.04 cm) stainless steel, or 0.024" (0.06 cm) aluminum or 0.020" (0.05 cm) copper. 30" (76.2 cm) min. clearance between top of cooking platform and bottom of unprotected wood or metal cabinet.

30" models require a 30" minimum base cabinet; 36" models require a 36" minimum base cabinet. After making the countertop cutout, some installations may require notching down the base cabinet side walls to clear the burner box. To avoid this modification, use a base cabinet with side walls wider than the cutout. If cabinet has a drawer, a 4" depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required. The drawer depth may need to be shortened to avoid interfering with the regulator. All dimensions are shown in inches.

APPROVED BUILT-IN OVEN AND COOKTOP COMBINATIONS

ELECTRIC COOKTOP

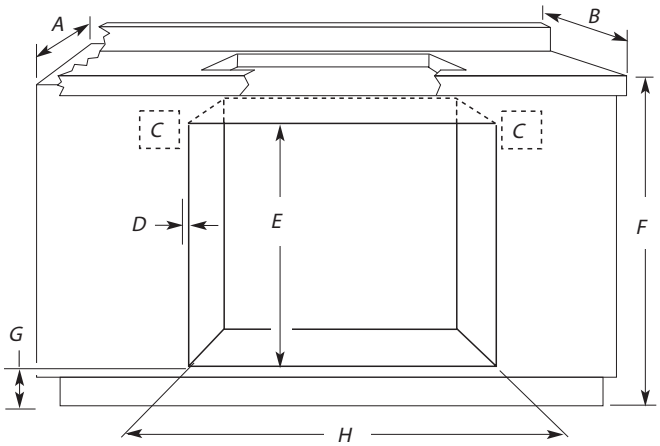

APPROVED COMBINATIONS

	Model Numbers
Built-In Ovens	RBS245, RBS275, RBS305, RBS277, RBS307, GBS279, GBS309
Electric Cooktops	GJC3034, GJC3634, GJC3054, GJC3654, GJC3055, GJC3655, RCC3024, RCS3004, RCS3014

CUTOUT DIMENSIONS

Oven Size	Oven Cutout Dimension
24" (61 cm)	22½" (57.2 cm)
27" (68.6 cm)	25½" (64.8 cm)
30" (76.2 cm)	28½" (72.4 cm)

A. 24" (61 cm) cabinet depth
B. 25" (63.5 cm) countertop depth
C. Recommended oven and cooktop junction box locations
D. Allow ⅝" (1.6 cm) for oven to overlap each side.
E. 27¾" (70.5 cm) minimum cutout height
F. 36" (91.4 cm) from cabinet base to countertop
G. 4⅝" (11.7 cm) from floor
H. See Cutout Dimensions chart.

For the approved model number combinations refer to the undercounter label located on top of the oven chassis and on the bottom of the Cooktop burner box.

NOTE: For undercounter installation, it is recommended that the junction boxes for oven and cooktop be located in the adjacent right or left cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the upper rear right or left corner of the side wall surface to pass the appliance cable through to the junction box. On models with Steam-Assist, it will be necessary to drill a ½" (1.3 cm) minimum diameter hole in the upper right or left rear corner of the side wall to pass the water supply tubing through to the undersink water filter. If water supply tubing hole is drilled on the same side as the oven cable hole, a minimum of 2" (5.1 cm) is required between the 2 holes.

GAS COOKTOP

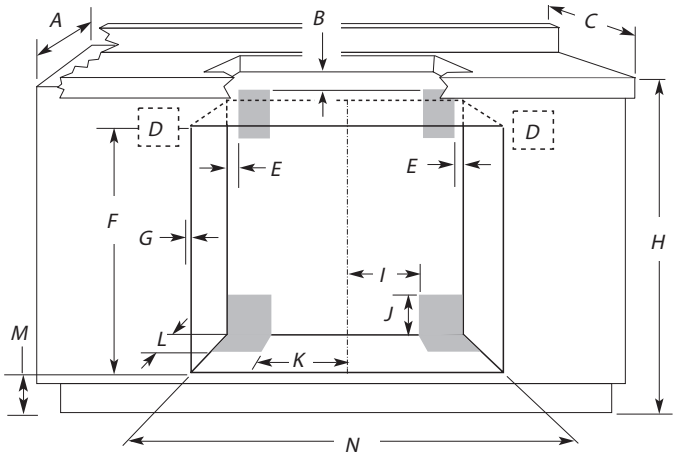

APPROVED COMBINATIONS

	Model Numbers
Built-In Ovens	RBS245, RBS275, RBS305, RBS277, RBS307, GBS279, GBS309
Gas Cooktops	GLT3057, GLT3657, SCS3017, SCS3617, GLS3064, GLS3665, GLS3074, GLS3675

CUTOUT DIMENSIONS

Oven Size	Oven Cutout Dimension
24" (61 cm)	22½" (57.2 cm)
27" (68.6 cm)	25½" (64.8 cm)
30" (76.2 cm)	28½" (72.4 cm)

A. 24" (61 cm) cabinet depth
B. 1" (2.5 cm) clearance from the top of junction box to bottom of countertop.
C. 25" (63.5 cm) countertop depth
D. Recommended oven junction box locations
E. 1" (2.5 cm) clearance from the side of junction box to cabinet wall.
F. 27¾" (70.5 cm) minimum cutout height
G. Allow ⅝" (1.6 cm) for oven to overlap each side.
H. 36" (91.4 cm) from cabinet base to countertop
I. Gas line through wall 10½" (26.7 cm) to center of cutout
J. 3¼" (8.3 cm)
K. Gas line through floor 10½" (26.7 cm) to center of cutout
L. 3½" (8.9 cm)
M. 4⅝" (11.7 cm) from floor
N. See Cutout Dimensions chart.

For the approved model number combination refer to the undercounter label located on top of the oven chassis.

NOTE: For undercounter installation, it is recommended that the junction box for oven be located in the adjacent right or left cabinet. A 1" (2.5 cm) minimum diameter hole should have been drilled in the upper rear right or left corner of the side wall surface to pass the appliance cable through to the junction box. On models with Steam-Assist, it will be necessary to drill a 1/2" (1.3 cm) minimum diameter hole in the upper right or left rear corner of the side wall to pass the water supply tubing through to the undersink water filter. If water supply tubing hole is drilled on the same side as the oven cable hole, a minimum of 2" (5.1 cm) is required between the 2 holes. The upper shaded areas are recommended locations for recessed junction box for 120-volt grounded outlet for cooktop. Lower shaded areas are recommended locations for flexible or rigid gas pipe installation. The gas pipe can be installed on either side of the cutout, and either through the floor or through the wall.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

30" ELECTRIC DOWNDRAFT COOKTOP DIMENSIONS

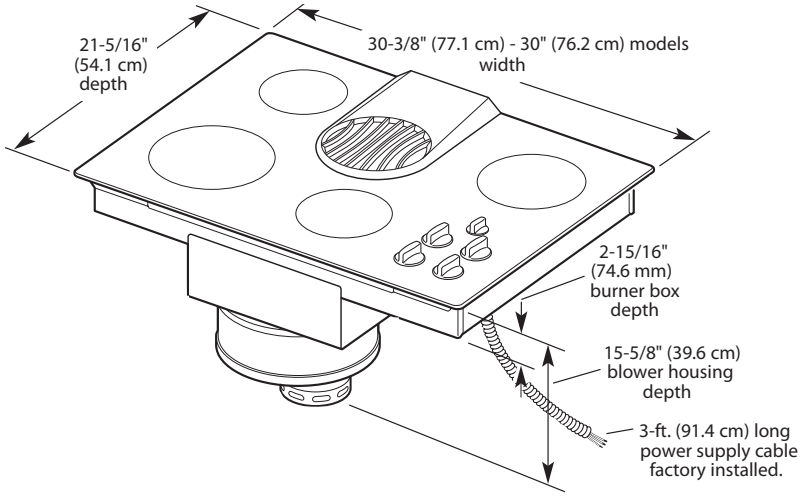

CUTOUT DIMENSIONS

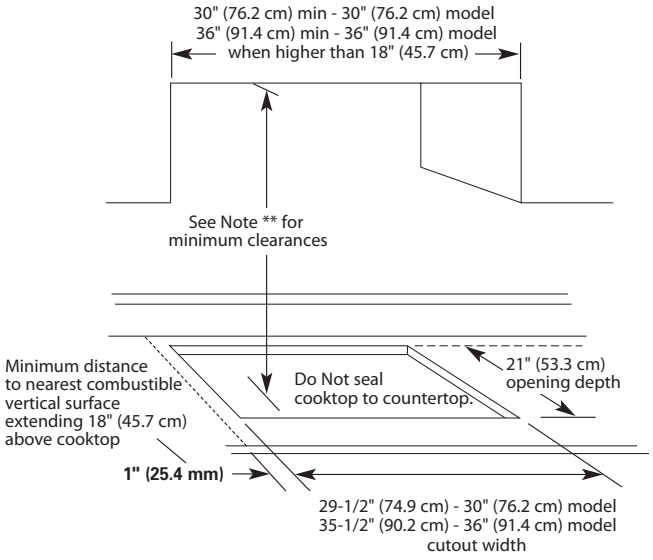
30" (76.2 cm) min - 30" (76.2 cm) model
36" (91.4 cm) min - 36" (91.4 cm) model
when higher than 18" (45.7 cm)
See Note ** for
minimum clearances
Minimum distance
to nearest combustible
vertical surface
extending 18" (45.7 cm)
above cooktop
Do Not seal
cooktop to countertop.
21" (53.3 cm)
opening depth
1" (25.4 mm)
29-1/2" (74.9 cm) - 30" (76.2 cm) model
35-1/2" (90.2 cm) - 36" (91.4 cm) model
cutout width

Minimum base cabinet dimensions:
30" (76.2 cm) base cabinet width
24" (61 cm) base cabinet depth
25" (63.5 cm) countertop depth

Countertop opening dimensions that are shown must be used. Given dimensions are minimum clearances and provide required 0" (0 cm) clearance.

New installations — Follow minimum dimensions given.

Replacement installation — Be sure that front edge of cooktop is at least 1-1/2" (38.1 mm) back from front edge of countertop. If cabinet has drawers, drawers will need to be removed and drawer fronts installed on front of cabinet.

Side clearance — 6" (15.2 cm) minimum clearance between side of cooktop and side wall is recommended for maximum ventilation performance.

Rear clearance — 3/4" (19.1 mm) clearance between rear edge of cooktop and rear wall is recommended.

Motor/blower clearance — 2" (51 mm) minimum clearance between motor and cabinet is required for proper cooling. 6" (15.2 cm) clearance is recommended for servicing access.

** Note: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and bottom of unprotected wood or sheet metal.

EXHAUST DUCT CUTOUT LOCATION

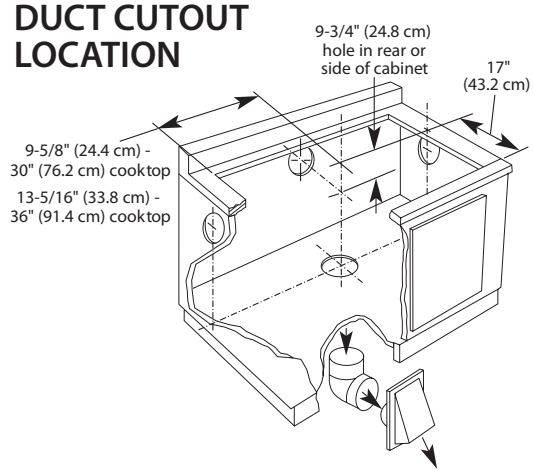

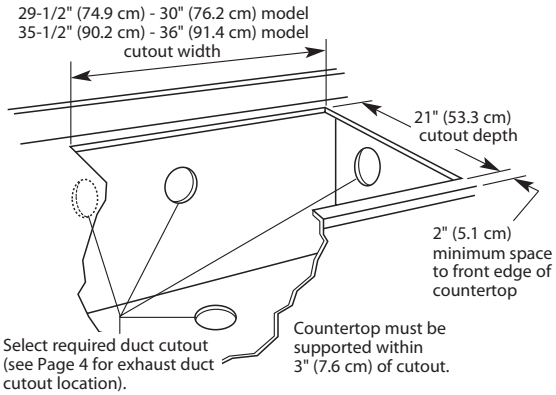

MODULAR DOWNDRAFT COOKTOP DIMENSIONS

PRODUCT DIMENSIONS

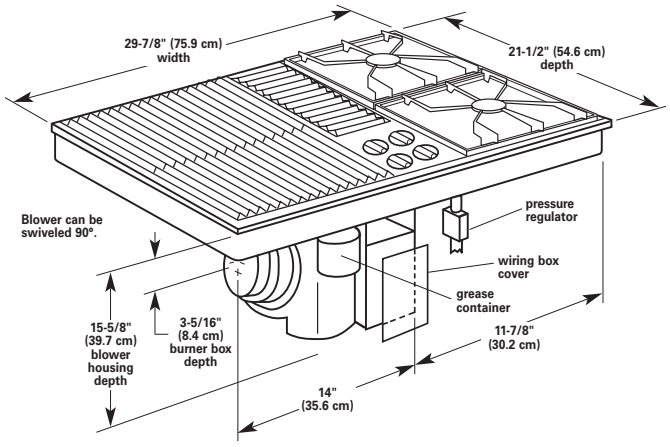

CUTOUT DIMENSIONS

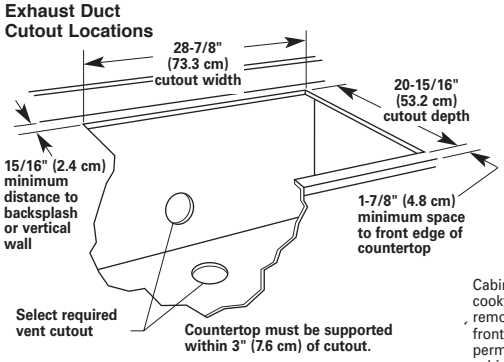
Exhaust Duct Cutout Locations
28-7/8" (73.3 cm) cutout width
20-15/16" (53.2 cm) cutout depth
15/16" (2.4 cm) minimum distance to backsplash or vertical wall
1-7/8" (4.8 cm) minimum space to front edge of countertop
Select required vent cutout
Countertop must be supported within 3" (7.6 cm) of cutout.

If cabinet has drawers, drawers will need to be removed and drawer fronts installed on front of cabinet.

Cabinet drawers under the cooktop will need to be removed and the drawer fronts installed permanently on front of cabinet.

Minimum base cabinet dimensions
30" (76.2 cm) base cabinet.
24" (61.0 cm) base cabinet depth
25" (63.5 cm) countertop depth



Cutout preparation:
Decorative laminate — Chamfer all exposed edges to prevent chipping laminate. Cut radius corners and file to insure smooth edges and to prevent cracking.

CLEARANCE DIMENSIONS

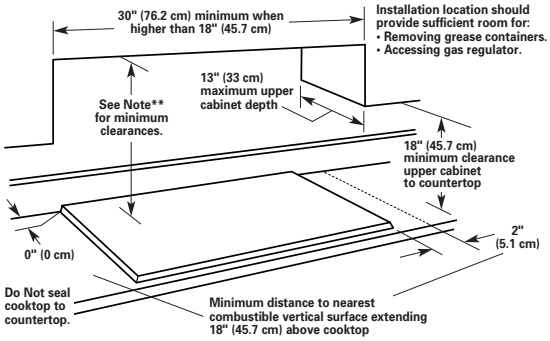
30" (76.2 cm) minimum when higher than 18" (45.7 cm)
Installation location should provide sufficient room for:
• Removing grease containers.
• Accessing gas regulator.
See Note** for minimum clearances.
13" (33 cm) maximum upper cabinet depth
18" (45.7 cm) minimum clearance upper cabinet to countertop
2" (5.1 cm)
0" (0 cm)
Do Not seal cooktop to countertop.
Minimum distance to nearest combustible vertical surface extending 18" (45.7 cm) above cooktop

**** Note: 30" (76.2 cm) minimum when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.**

36" (91.4 cm) minimum clearance between the top of the cooking platform and bottom of unprotected wood or sheet metal.

Side clearance — 2" (5.1 cm) minimum clearance is required. 6" (15.2 cm) clearance between side of cooktop and side wall is recommended for maximum ventilation performance.

Rear clearance — The rear edge of the cooktop may be installed flush with countertop backsplash. 15/16" (2.4 cm) clearance between rear edge of appliance and rear wall is recommended.

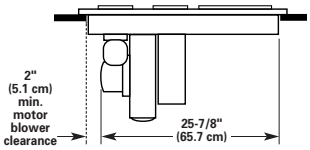

Motor/blower clearance — 2" (5.1 cm) clearance is required between motor and cabinet for proper cooling. 6" (15.2 cm) clearance is recommended for maximum performance.

Electrical Outlet Location

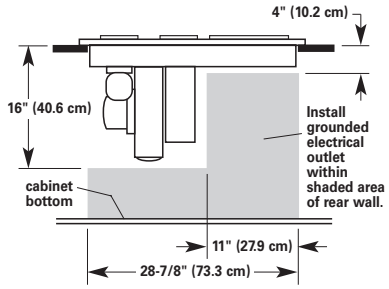

Gas Line Location

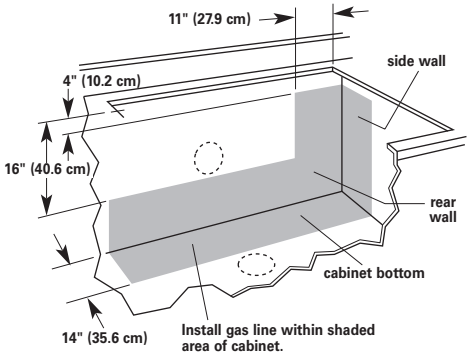

OPTIONAL MODULES FOR GAS DOWNDRAFT MODULAR

Description	Part No.
Two-Burner	SCM10DB — Black
Non-Stick Grill	SCM20DB — Black
Non-Stick Griddle (requires SCM20DB as a power source)	SCM40DB — Black
Grill Cover	SCM50DB — Black

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

RETRACTABLE DOWNDRAFT VENTILATION SYSTEM DIMENSIONS

Countertop Cutout Dimensions for Installing Cooktops with Retractable Vent Systems

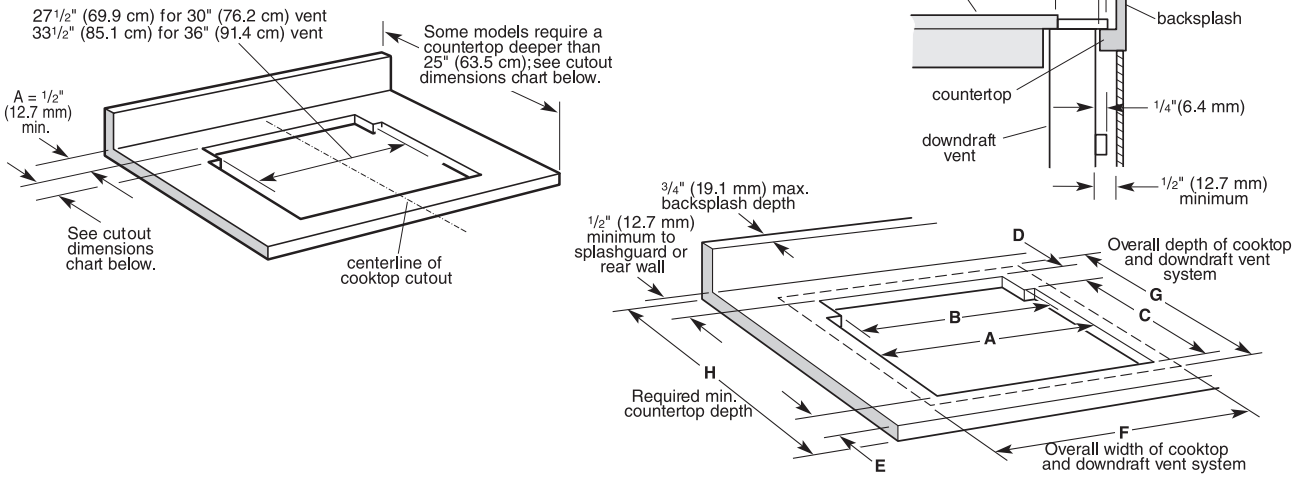
27 1/2" (69.9 cm) for 30" (76.2 cm) vent
33 1/2" (85.1 cm) for 36" (91.4 cm) vent
Some models require a countertop deeper than 25" (63.5 cm); see cutout dimensions chart below.
A = 1/2" (12.7 mm) min.
See cutout dimensions chart below.
centerline of cooktop cutout
1-7/8" (4.8 cm)
1/4" (6.4 mm)
1/2" (12.7 mm) min.
cooktop
backsplash
countertop
1/4"(6.4 mm)
downdraft vent
1/2" (12.7 mm) minimum
3/4" (19.1 mm) max. backsplash depth
1/2" (12.7 mm) minimum to splashguard or rear wall
D
Overall depth of cooktop and downdraft vent system
G
C
B
A
H
Required min. countertop depth
F
E
Overall width of cooktop and downdraft vent system

Cooktop Model	Installed with Vent System Model	Size	A	B	C	D	E	F	G	H
GJC3034R*	GZ7930XH	30"	29 1/2	27 1/2	20 1/2	2	2	30 5/16	23	25 3/4
GJC3634R*	GZ7936XH	36"	35 1/2	33 1/2	20 1/2	2	2	36 5/16	23	25 3/4
GJC3655R*	GZ7936XH	36"	35 1/2	33 1/2	20 1/2	2	2	36 5/16	23	25 3/4
GJC3055R*	GZ7930XH	30"	29 1/2	27 1/2	20 1/2	2	2	30 5/16	23	25 3/4
GJC3654R*	GZ7936XH	36"	35 1/2	33 1/2	20 1/2	2	2	36 5/16	23	25 3/4
GJC3054R*	GZ7930XH	30"	29 1/2	27 1/2	20 1/2	2 1/8	2	30 5/16	23	25 3/4
RCC3024R*	GZ7930XH	30"	29 1/2	27 1/2	20 1/2	2	2	30	23	25 3/4
RCS3014R*	GZ7930XH	30"	28 7/8	27 1/2	19	2 1/2	3	31 1/2	23	25 1/2
RCS3004R*	GZ7930XH	30"	28 7/8	27 1/2	19	2 1/2	3	31 1/2	23	25 1/2
GLS3675V	GZ7936XH	36"	35 1/4	33 1/2	19 5/8	2 1/8	1 3/4	32 1/2	23	25
GLS3075V	GZ7930XH	30"	29	27 1/2	19 5/8	2 1/8	1 3/4	31 3/8	23	25
GLT3657R	GZ7936XH	36"	35 1/4	33 1/2	19	2 1/8	1 3/4	36 5/8	23	25
GLT3057R	GZ7930XH	30"	29	27 1/2	19	2 1/8	1 3/4	31 3/8	23	25
SCS3617R	GZ7936XH	36"	35 1/4	33 1/2	19 5/8	2 1/8	1 3/4	37 1/2	23	25
SCS3017R	GZ7930XH	30"	29	27 1/2	19 5/8	2 1/8	1 3/4	31 3/8	23	25

* Installation with vent system requires countertop and base cabinet deeper than standard 25" deep countertop and 24" deep base cabinet.
All dimensions are shown in inches.

Models GZ7930XH and GZ7936XH

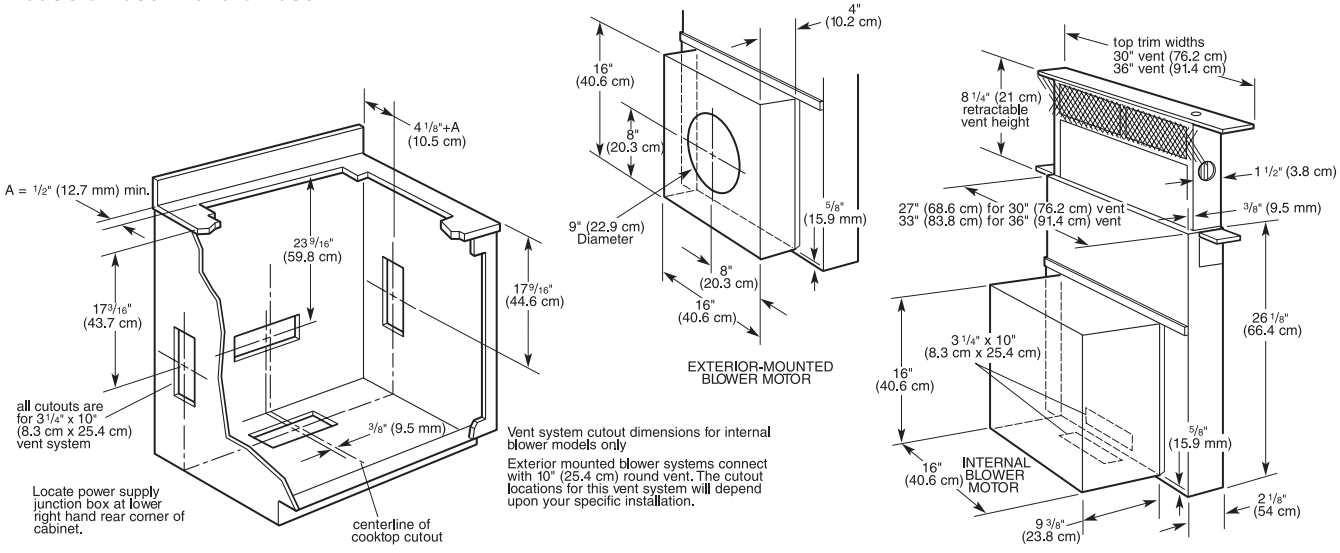
4 1/8"+A (10.5 cm)
A = 1/2" (12.7 mm) min.
23 9/16" (59.8 cm)
17 3/16" (43.7 cm)
17 9/16" (44.6 cm)
all cutouts are for 3 1/4" x 10" (8.3 cm x 25.4 cm) vent system
3/8" (9.5 mm)
Locate power supply junction box at lower right hand rear corner of cabinet.
centerline of cooktop cutout
4" (10.2 cm)
16" (40.6 cm)
8" (20.3 cm)
9" (22.9 cm) Diameter
5/8" (15.9 mm)
8" (20.3 cm)
16" (40.6 cm)
EXTERIOR-MOUNTED BLOWER MOTOR
Vent system cutout dimensions for internal blower models only
Exterior mounted blower systems connect with 10" (25.4 cm) round vent. The cutout locations for this vent system will depend upon your specific installation.
top trim widths 30" vent (76.2 cm) 36" vent (91.4 cm)
8 1/4" (21 cm) retractable vent height
1 1/2" (3.8 cm)
27" (68.6 cm) for 30" (76.2 cm) vent
33" (83.8 cm) for 36" (91.4 cm) vent
3/8" (9.5 mm)
26 1/8" (66.4 cm)
3 1/4" x 10" (8.3 cm x 25.4 cm)
16" (40.6 cm)
5/8" (15.9 mm)
16" (40.6 cm)
INTERNAL BLOWER MOTOR
2 1/8" (54 cm)
9 3/8" (23.8 cm)

VENTILATION SYSTEMS FEATURES & SPECIFICATIONS

	Wall Canopy	Pop-Up Downdraft	High Performance		
Model No. (36")	**GZ9736XS**	**GZ7936XH**	**UXT5536AD**	**UXT5436AD**	**UXT5336AA**
Type	Convertible	Vented	Convertible	Convertible	Convertible
Duct Type 6" Round 7" Round 3¼" x 10" Rectangular	 Yes — —	 — — Yes	 Yes — Yes	 Yes — Yes	 — — Yes
Washable Grease Filter	Yes	Yes	Yes	Yes	Yes
Vertical CFM 6" Round 7" Round 3¼" x 10" Rectangular	 370 — —	 — — 600	 400 — 400	 400 — 400	 — — 360
Horizontal CFM 3¼" x 10" Rectangular	—	—	400	400	350
Vertical Sones 6" Round 7" Round 3¼" x 10" Rectangular	 7.0 — —	 — — 6.5	 8.2 — 8.2	 5.5 — 5.5	 — — 5.5
Horizontal Sones	—	—	8.0	5.5	6.0
Control	3-Speed Slide	Variable Speed Rotary Control	3-Speed Push Button	3-Speed Electronic Touch	Variable Speed Slide
Damper	Yes	Yes	Yes	Yes	Yes
Blower	Centrifugal Fan	Dual Centrifugal Fan	Centrifugal Fan	Centrifugal Fan	Dual Centrifugal Fan
Light††	Halogen	—	1-Level Halogen	1-Level Halogen	2-Level Incandescent
Dimensions (in.)	5 1⁄16" H (Hood) 32-46 1⁄8" Total Height x 19 5⁄8" D	26H (up)† 12 3⁄4" H (dw) x 11" D	9" H x 19 7⁄10" D	6" H x 22 1⁄4" D	9" H x 20" D
Approx. Shipping Weight (lbs.)	49	57	42	42	34
Color Availability*	S	S**	S	S	S

	Wall Canopy	Pop-Up Downdraft	High Performance		
Model No. (30")	**GZ9730XS**	**GZ7930XH**	**UXT5530AD**	**UXT5430AD**	**UXT5330AA**
Type	Convertible	Vented	Convertible	Convertible	Convertible
Duct Type 6" Round 7" Round 3¼" x 10" Rectangular	 Yes — —	 — — Yes	 Yes — Yes	 Yes — Yes	 — — Yes
Washable Grease Filter	Yes	Yes	Yes	Yes	Yes
Vertical CFM 6" Round 7" Round 3¼" x 10" Rectangular	 370 — —	 — — 600	 400 — 400	 400 — 400	 — — 360
Horizontal CFM 3¼" x 10" Rectangular	—	—	400	400	350
Vertical Sones 6" Round 7" Round 3¼" x 10" Rectangular	 7.0 — —	 — — 6.5	 8.2 — 8.2	 5.5 — 5.5	 — — 5.5
Horizontal Sones	—	—	8.0	5.5	6.0
Control	3-Speed Slide	Variable Speed Rotary Control	3-Speed Push Button	3-Speed Electronic Touch	Variable Speed Slide
Damper	Yes	Yes	Yes	Yes	Yes
Blower	Centrifugal Fan	Dual Centrifugal Fan	Centrifugal Fan	Centrifugal Fan	Dual Centrifugal Fan
Light††	Halogen	—	1-Level Halogen	1-Level Halogen	2-Level Incandescent
Dimensions (in.)	5 1⁄16" H (Hood) 32-46 1⁄8" Total Height x 19 5⁄8" D	26H (up)† 12 3⁄4" H (dw) x 11" D	9" H x 19 7⁄10" D	6" H x 22 1⁄4" D	9" H x 20" D
Approx. Shipping Weight (lbs.)	46	54	37	36	32
Color Availability*	S	S**	S	W, B, S	S

* W – White, Q – Biscuit, B – Black and S – Stainless Steel

** S – Stainless Steel with Brushed Aluminum Trim

† Raised height from cooktop 8 1⁄4.

†† Some models light bulbs to be purchased separately.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

VENTILATION SYSTEMS FEATURES & SPECIFICATIONS

	Under Cabinet/ Traditional Canopy					
Model No. (36")	**UXT5236AD**	**UXT4836AA**	**UXT4236AA**	**UXT4036AA**	**UXT3036AA**	**UXT2036AA**
Type	Convertible	Convertible	Convertible	Non-Vented	Vented	Vented
Duct Type 6" Round 7" Round 3¼" x 10" Rectangular	 Yes — Yes	 — Yes Yes	 — Yes Yes	 — — —	 — — Yes	 — Yes —
Washable Grease Filter	Yes	Yes	Yes	Yes	Yes	Yes
Vertical CFM 6" Round 7" Round 3¼" x 10" Rectangular	 250 — 250	 — 220 200	 — 220 190	 — — —	 — — 190	 — 190 —
Horizontal CFM 3¼" x 10" Rectangular	250	170	160	—	160	—
Vertical Sones 6" Round 7" Round 3¼" x 10" Rectangular	 3.0 — 4.0	 — 4.5 4.5	 — 8.0 7.0	 — — —	 — — 6.5	 — 6.0 —
Horizontal Sones	4.0	4.5	7.0	—	6.5	—
Control	3-Speed Slide	Variable Speed Rotary Control	Variable Speed Rotary Control	2-Speed Rocker Switch	2-Speed Rocker Switch	2-Speed Rocker Switch
Damper	Yes	Yes	Yes	—	Yes	—
Blower	Centrifugal Fan	Axial Fan	Axial Fan	Axial Fan	Axial Fan	Axial Fan
Light††	1-Level Incandescent	2-Level Incandescent	2-Level Incandescent	1-Level Incandescent	1-Level Incandescent	1-Level Incandescent
Dimensions (in.)	6" H x 22¼" D	6" H x 17½" D	6" H x 17½" D	6" H x 17½" D	6" H x 17½" D	6" H x 17½" D
Approx. Shipping Weight (lbs.)	23	17	15	14	13	12
Color Availability*	W, B, S	W, B, S	W, Q, B, S	W, B	W, B	W, B

	Under Cabinet/ Traditional Canopy					
Model No. (30")	**UXT5230AD**	**UXT4830AA**	**UXT4230AA**	**UXT4030AA**	**UXT3030AA**	**UXT2030AA**
Type	Convertible	Convertible	Convertible	Non-Vented	Vented	Vented
Duct Type 6" Round 7" Round 3¼" x 10" Rectangular	 Yes — Yes	 — Yes Yes	 — Yes Yes	 — — —	 — — Yes	 — Yes —
Washable Grease Filter	Yes	Yes	Yes	Yes	Yes	Yes
Vertical CFM 6" Round 7" Round 3¼" x 10" Rectangular	 250 — 250	 — 220 200	 — 220 190	 — — —	 — — 190	 — 190 —
Horizontal CFM 3¼" x 10" Rectangular	250	170	160	—	160	—
Vertical Sones 6" Round 7" Round 3¼" x 10" Rectangular	 3.0 — 4.0	 — 4.5 4.5	 — 8.0 7.0	 — — —	 — — 6.5	 — 6.0 —
Horizontal Sones	4.0	4.5	7.0	—	6.5	—
Control	3-Speed Slide	Variable Speed Rotary Control	Variable Speed Rotary Control	2-Speed Rocker Switch	2-Speed Rocker Switch	2-Speed Rocker Switch
Damper	Yes	Yes	Yes	—	Yes	—
Blower	Centrifugal Fan	Axial Fan	Axial Fan	Axial Fan	Axial Fan	Axial Fan
Light††	1-Level Incandescent	2-Level Incandescent	2-Level Incandescent	1-Level Incandescent	1-Level Incandescent	1-Level Incandescent
Dimensions (in.)	6" H x 22¼" D	6" H x 17½" D	6" H x 17½" D	6" H x 17½" D	6" H x 17½" D	6" H x 17½" D
Approx. Shipping Weight (lbs.)	22	16	13	11	12	12
Color Availability*	W, Q, B, S	W, B, S	W, Q, B, S	W, Q, B, S	W, Q, B	W, B

* W – White, Q – Biscuit, B – Black and S – Stainless Steel
** S – Stainless Steel with Brushed Aluminum Trim

† Raised height from cooktop 8¼.
†† Some models light bulbs to be purchased separately.

HOOD AND VENT PRODUCT DIMENSIONS

Models GZ9736XS (36") and GZ9730XS (30")

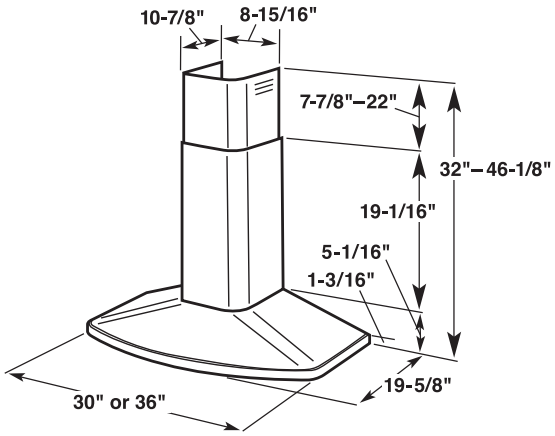

Models UXT5536AA (36") and UXT5530AA (30")

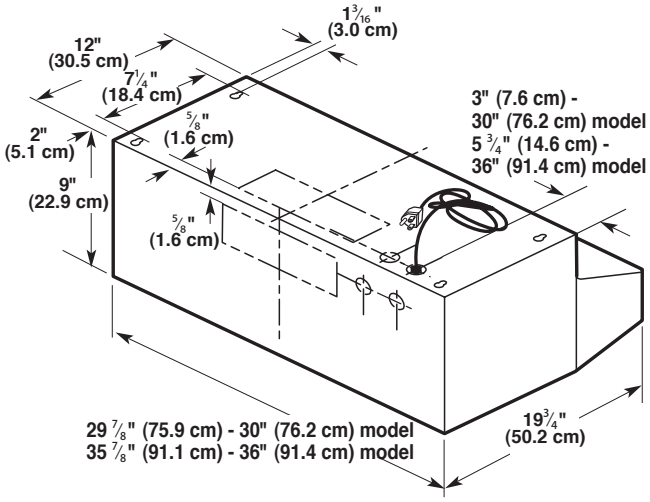

Models UXT5336AD (36") and UXT5330AD (30")

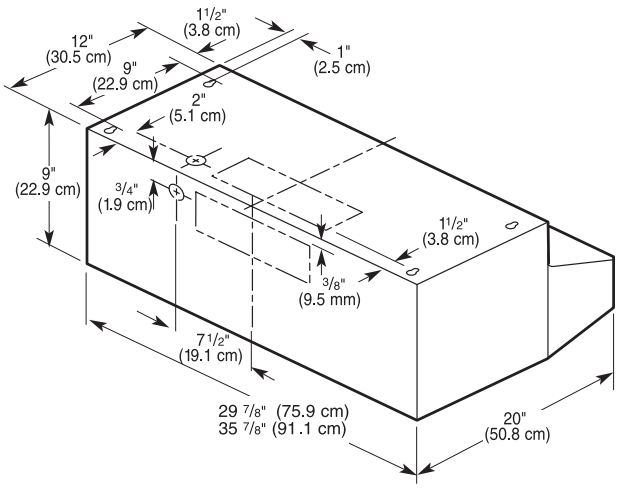

Models UXT5236AD (36"), UXT5230AD (30"), UXT5436AD (36") and UXT5430 (30")

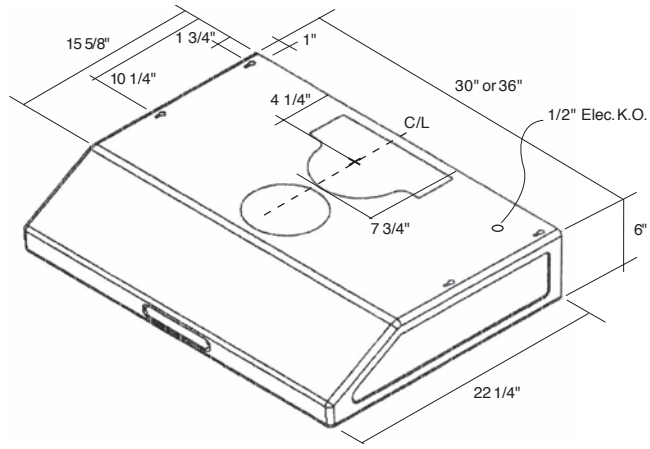

Models UXT4836AA (36") and UXT4830AA (30")

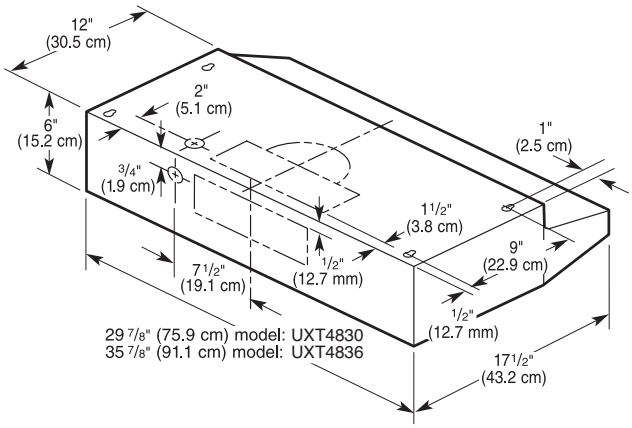

Models UXT4236AA (36") and UXT4230AA (30")

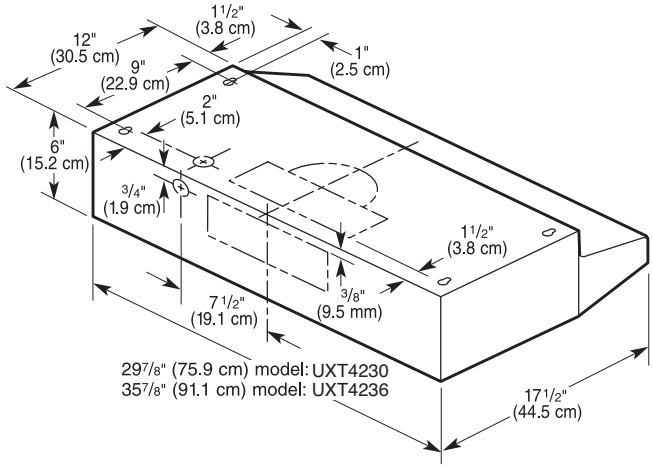

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

HOOD AND VENT PRODUCT DIMENSIONS

UXT4036AA (36"), UXT4030AA (30"), UXT3036AA (36") and UXT3030AA (30")

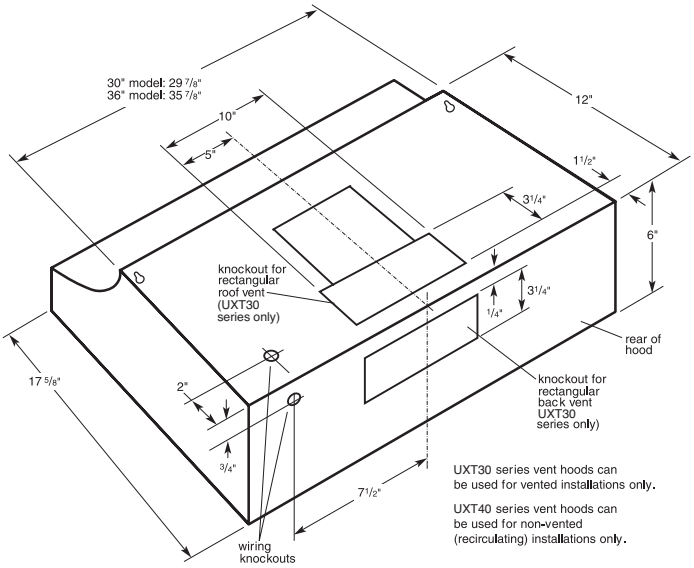

Models UXT2036AA (36") and UXT2030AA (30")

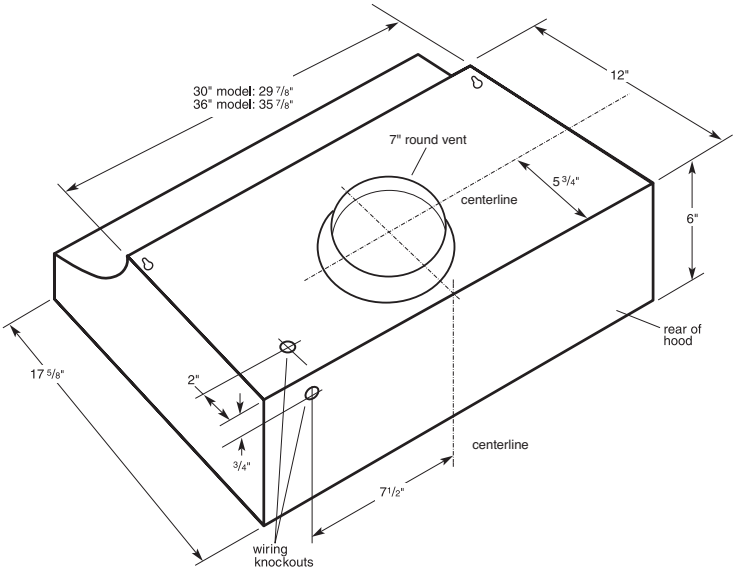

FREESTANDING ELECTRIC RANGE FEATURES & SPECIFICATIONS

	Whirlpool Gold®								
Model No.	**Double Oven GGE350LW**	**GFE471LV**	**GFE461LV**	**WFE381LV**	**WFE371LV**	**WFE366LV**	**WFE361LV**	**WFE321LW**	**WFE301LV**
Capacity (cu. ft.)	2.0/4.3	5.3	5.3	5.3	5.3	5.3	4.8	5.3	4.8
Control system	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic	Electronic
Cooktop									
Ceramic Glass CleanTop® System	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
6" Radiant Element	2	2	2	2	2	2	2	2	2
8" Radiant Element	—	—	—	—	—	—	—	1	2
9" Radiant Element	1	—	—	—	—	—	1	—	—
12" Radiant Element	—	—	—	—	1	1	—	1	—
6"/9" Dual Radiant Element	—	1	1	1	1	1	1	—	—
9"/12" Dual Radiant Element	1	—	1	1	—	—	—	—	—
6"/9"/12" Dual Radiant Element	—	1	—	—	—	—	—	—	—
6" Warm Zone Element	Yes	Yes	Yes	Yes	Yes	—	—	—	—
Oven									
Steam Clean Option	—	Yes	Yes	Yes	Yes	—	—	Yes	—
Hidden Bake Element	—	Yes	Yes	Yes	Yes	Yes	—	Yes	—
TimeSavor™ Convection Cooking System	—	Plus	Plus	Yes	—	—	—	—	—
AccuBake® Temperature Management System	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	—
Rapid Preheat	Yes	Yes	Yes	—	—	—	—	—	—
Control Bake	—	Yes	Yes	—	—	—	—	—	—
Delay Bake	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	—
Oven Hold Warm	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	—
Custom Broil	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Sabbath Mode	Yes	Yes	Yes	—	—	—	—	—	—
Control Lockout	Yes	Yes	Yes	Yes	Yes	Yes	—	Yes	—
Clock & Timer	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Automatic Oven Light	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	—
Racks	3	2 Adjustable, 1 Split	3 Adjustable	2 Adjustable	2 Adjustable	2 Adjustable	2 Adjustable	2 Adjustable	2 Adjustable
Oven Window	EasyView™	EasyView™	EasyView™	EasyView™	EasyView™	EasyView™	EasyView™	EasyView™	EasyView™
Full-Width Storage Drawer	—	Warming	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Self-Cleaning System	Precise Clean™	Precise Clean™	Precise Clean™	Yes	Yes	Yes	Yes	Yes	—
Overall Features									
Energy Save Mode	—	Yes	Yes	—	—	—	—	—	—
Metal Handle	S	S	S	S	S	S	S	S	S
Color Availability*	Q, B, S	Q, B, S	Q, T, B, S	Q, B, S	Q, B, S	Q, T, B, S	Q, T, B, S, D	Q, B, S	Q, B, S

* Q – White, T – Biscuit, B – Black, S – Stainless Steel and D – Universal Silver

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

FREESTANDING ELECTRIC RANGE FEATURES & SPECIFICATIONS

Model No.	RF264LXS	RF263LXT	WFE114LW	RF114PXS	RF111PXS	RF110AXS	RF301OXT
Capacity (cu. ft.)	4.8	4.8	4.8	4.8	4.8	4.8	4.3
Controls	Electronic	Electronic	Electronic	Electronic	Knob	Knob	Knob
Cooktop							
6" High-Speed Coil Element (1,500 Watts)	2	—	—	—	—	—	—
8" High-Speed Coil Element (2,600 Watts)	2	2	—	2	—	—	—
6" Coil Element (1,500 Watts)	—	2	2	2	3	3	3
8" Coil Element (2,100 Watts)	—	—	2	—	1	1	1
Upswept, Porcelain-on-Steel SpillGuard™ Cooktop	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Drip Pans	Chrome	Chrome	Chrome	Chrome	Chrome	Chrome	Chrome
Cooktop "On" Indicator Light	Yes	Yes	Yes	Yes	Yes	Yes	—
Oven							
AccuBake® Temperature Management System	Yes	—	Yes	—	—	—	—
Delay Bake	Yes	Yes	—	—	—	—	—
Custom Broil	Yes	Yes	Yes	Yes	—	—	—
Clock and Timer	Yes	Yes	Yes	Yes	—	—	—
Control Lockout	Yes	Yes	Yes	—	—	—	—
Oven Light	Automatic	Automatic	Automatic	Automatic	Manual	Manual	Manual
Oven Window	EasyView™	EasyView™	EasyView™	Yes	Yes	—	—
2 Adjustable Racks	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Self-Cleaning System	Yes	Yes	—	—	—	—	—
Overall Features							
Full-Width Storage Drawer	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Approx. Shipping Weight (lbs.)	136	138	138	141	155	155	160
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 14.1 Kw 10.7 kw	 14.1 Kw 10.7 kw	 10.1 Kw 7.7 Kw	 11.7 Kw 8.9 Kw	 9.3 Kw 7.1 Kw	 9.3 Kw 7.1 Kw	 8.8 Kw 7.9 Kw
Color Availability*	Q, B	Q, B, T, S	S	Q, B, T	Q	Q	W

* Q – White, T – Biscuit, B – Black, S – Stainless Steel and W – White with Black

FREESTANDING ELECTRIC RANGE DIMENSIONS

Models GGE350LW, GG350LW, GFE471LV, GFE461LV, WFE381LV, WFE371LV, WFE366LV, WFE361LV, WFE321LW, WFE301LV, RF264LXS, RF263LXT, WFE114LW, RF114PXS*, RF111PXS* and RF110AXS*

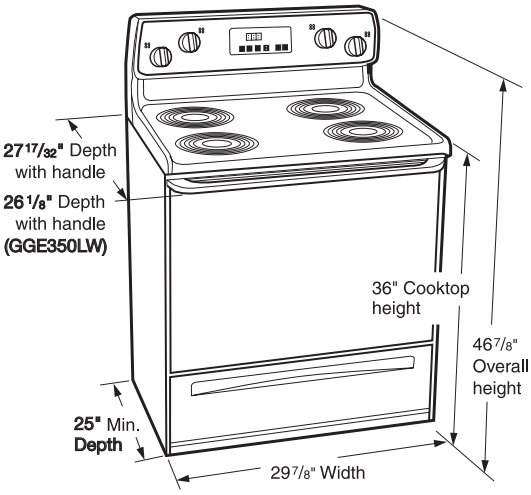

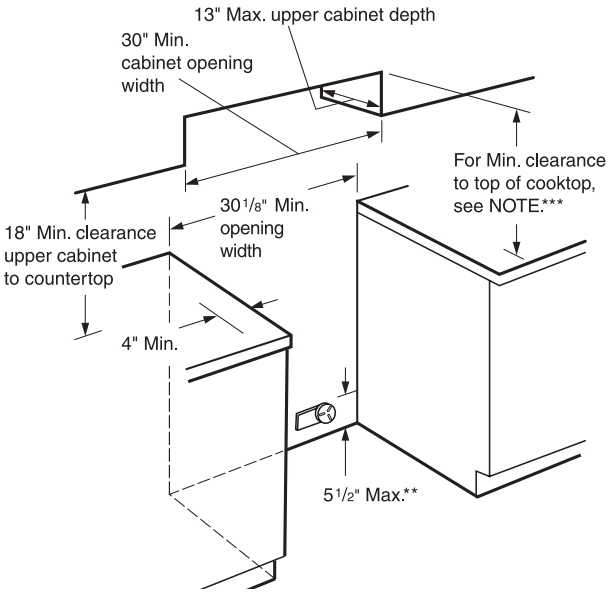
13" Max. upper cabinet depth
30" Min. cabinet opening width
For Min. clearance to top of cooktop, see NOTE.***
30 1/8" Min. opening width
18" Min. clearance upper cabinet to countertop
4" Min.
5 1/2" Max.**

* Models RF114PXS, RF111PXS and RF110AXS
  - Do not seal range to the side cabinets.
  - **If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" minimum.**
  - **These are not flush-to-cabinet models.**

Do not pinch the power supply cord between the range and the wall.

** Wall receptacle - 8" to 22" from either cabinet, 5 1/2" Max. from floor. Position receptacle as shown.

*** NOTE: 24" Min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" Min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Model RF301OXT

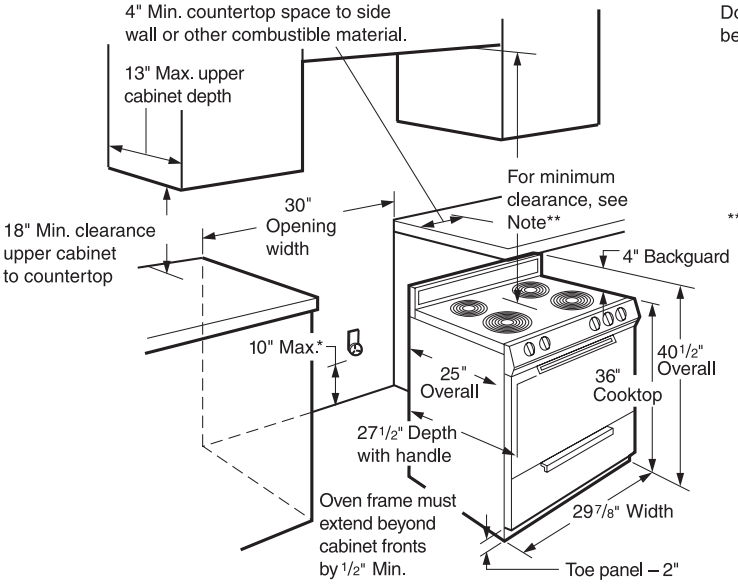
4" Min. countertop space to side wall or other combustible material.
13" Max. upper cabinet depth
For minimum clearance, see Note**
30" Opening width
18" Min. clearance upper cabinet to countertop
4" Backguard
10" Max.*
25" Overall
36" Cooktop
40 1/2" Overall
27 1/2" Depth with handle
Oven frame must extend beyond cabinet fronts by 1/2" Min.
29 7/8" Width
Toe panel – 2"

Do not pinch the power supply cord between the range and the wall.

* Wall receptacle - 5 1/2" Max. from right or left of center of range 10" Max. from floor. Position receptacle as shown.

** NOTE: 24" Min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" Min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

FREESTANDING GAS RANGE FEATURES & SPECIFICATIONS

	Whirlpool Gold®			
Model No.	**GFG471LV**	**GFG461LV**	**WFG381LV**	**WFG371LV**
Capacity (cu. ft.)	5.0	5.0	5.0	5.0
Control System	Electronic	Electronic	Electronic	Electronic
Cooktop				
Recessed Cooktop	Full Sump	Full Sump	Full Sump	Full Sump
Upswept, Porcelain SpillGuard™ Cooktop	Yes	Yes	Yes	Yes
Grates	Full-Width, Cast-Iron	Full-Width, Cast-Iron	Full-Width, In-Sump Cast-Iron	Full-Width, In-Sump Cast-Iron
Sealed Burners	Yes	Yes	Yes	Yes
5,000 BTU AccuSimmer® Burner	1	1	1	1
7,000 BTU Burner	—	—	—	—
7,500 BTU Fish Burner	—	—	—	—
8,000 BTU Burner	—	—	—	—
9,000 BTU Burner	—	—	—	—
9,500 BTU Burner	1	1	1	1
11,500 BTU Burner	—	—	—	—
13,500 BTU Power™ Burner	—	—	—	—
15,000 BTU Power™ Burner	—	—	—	—
15,500 BTU Power™ Burner	1	1	2	2
17,000 BTU Power™ Burner	1	1	—	—
8,000 BTU Middle Burner	1–Fish	1	1	—
Center Griddle	—	—	—	—
Oven				
TimeSavor™ Convection Cooking System	Yes	Yes	—	—
AccuBake® Temperature Management System	Yes	Yes	Yes	Yes
Rapid Preheat	Yes	Yes	—	—
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500	10,000/16,500	10,000/16,500	10,000/16,500
Delay Bake	Yes	Yes	Yes	Yes
Oven Hold Warm	Yes	Yes	Yes	Yes
Custom Broil	Yes	Yes	Yes	Yes
Sabbath Mode	Yes	Yes	—	—
Control Lock	Yes	Yes	Yes	Yes
Clock and Timer	Yes	Yes	Yes	Yes
Oven Light	Automatic	Automatic	Yes	Automatic
Adjustable Racks	2	2	2	2
Adjustable Split Rack	1	—	—	—
Oven Window	EasyView™	EasyView™	EasyView™	EasyView™
Drawer	Warming	Storage	Storage	Storage
Self-Cleaning System	Precise Clean™	Precise Clean™	Adjustable Time	Adjustable Time
Overall Features				
Metal Handle	S	S	S	S
Colors Available*	Q, B, S	Q, T, B, S	Q, B, S	Q, B, S

* Q – White, T – Biscuit, B – Black, S – Stainless Steel, W – White with Black and D – Universal Silver

FREESTANDING GAS RANGE FEATURES & SPECIFICATIONS

Model No.	WFG361LV	WFG231LV	WFG114SV	WFG111SV	WFG110AV
Capacity (cu. ft.)	5.0	4.4	4.4	4.4	4.4
Control System	Electronic	Electronic	Electronic	Knob	Knob
Cooktop					
Recessed Cooktop	—	—	—	—	—
Upswept, Porcelain SpillGuard™ Cooktop	Yes	Yes	Yes	Yes	Yes
Grates	Cast-Iron	Cast-Iron	Steel	Steel	Steel
Sealed Burners	Yes	Semi Sealed	Yes	—	—
5,000 BTU AccuSimmer® Burner	1	—	—	—	—
7,000 BTU Burner	—	3	—	—	—
7,500 BTU Fish Burner	—	1	—	—	—
8,000 BTU Burner	—	1	—	—	—
9,000 BTU Burner	—	—	—	—	—
9,500 BTU Burner	2	—	3	4	4
11,500 BTU Burner	—	—	1	—	—
13,500 BTU Power™ Burner	1	—	—	—	—
15,000 BTU Power™ Burner	—	—	—	—	—
15,500 BTU Power™ Burner	—	—	—	—	—
17,000 BTU Power™ Burner	—	—	—	—	—
8,000 BTU Middle Burner	—	—	—	—	—
Center Griddle	—	Yes	—	—	—
Oven					
TimeSavor™ Convection Cooking System	—	—	—	—	—
AccuBake® Temperature Management System	Yes	—	—	—	—
Rapid Preheat	—	—	—	—	—
Broiler/Bake Burner BTU/Hr. Rating	10,000/16,500	10,000/16,500	10,000/16,500	10,000/16,500	10,000/16,500
Delay Bake	Yes	—	—	—	—
Oven Hold Warm	Yes	—	—	—	—
Custom Broil	Yes	—	—	—	—
Sabbath Mode	—	—	—	—	—
Control Lock	Yes	—	—	—	—
Clock and Timer	Yes	—	—	—	—
Oven Light	Automatic	Manual	Automatic	Manual	—
Adjustable Racks	2	2	2	2	2
Adjustable Split Rack	—	—	—	—	—
Oven Window	EasyView™	EasyView™	Yes	Yes	—
Drawer	Storage	Broiler	Broiler	Broiler Compartment	Broiler Compartment
Self-Cleaning System	Adjustable Time	—	—	—	—
Overall Features					
Metal Handle	S	—	—	—	—
Colors Available*	Q, T, B, S, D	Q, B, S	Q, W, T, B	Q	Q

* Q – White, T – Biscuit, B – Black, S – Stainless Steel, W – White with Black and D – Universal Silver

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

FREESTANDING GAS RANGE DIMENSIONS

Models GFG471LV, GFG461LV, WFG381LV, WFG371LV, WFG361LV

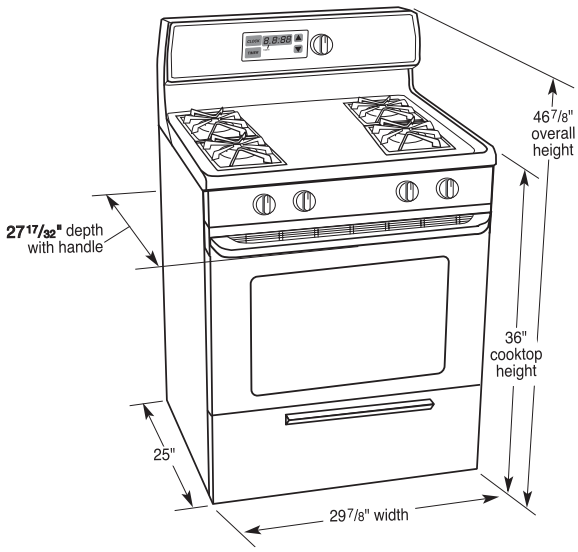

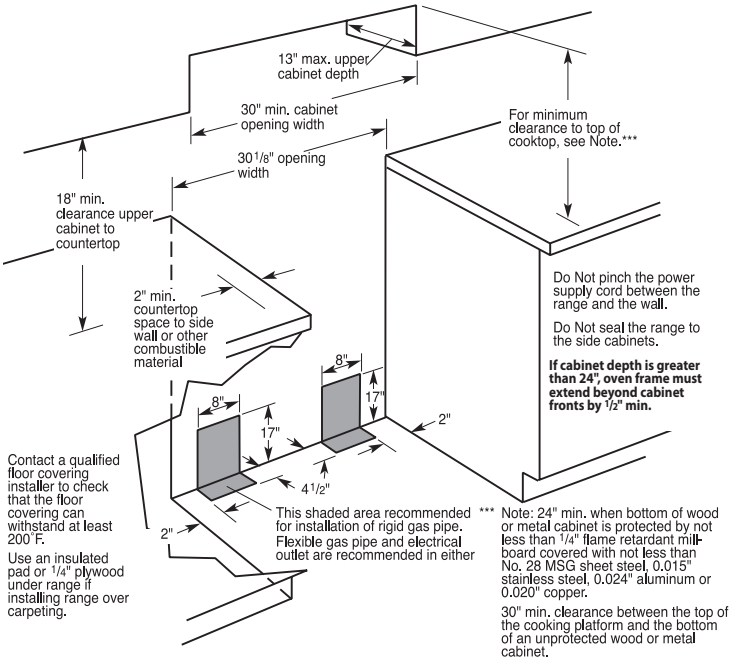
13" max. upper cabinet depth
30" min. cabinet opening width
30 1/8" opening width
For minimum clearance to top of cooktop, see Note.***
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
Do Not pinch the power supply cord between the range and the wall.
Do Not seal the range to the side cabinets.
If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" min.
8"
17"
2"
4 1/2"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200˚F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.
This shaded area recommended for installation of rigid gas pipe. Flexible gas pipe and electrical outlet are recommended in either

*** Note: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Models WFG231LV, WFG114SV, WFG111SV, WFG110AV
(WFG110AV does not have a window)
These are not flush-to-cabinet models.

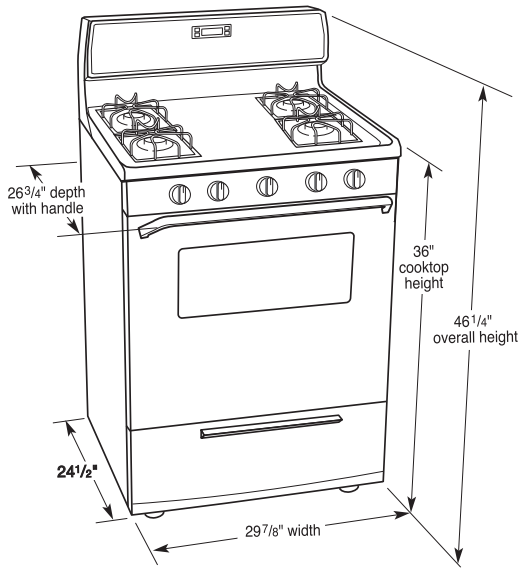

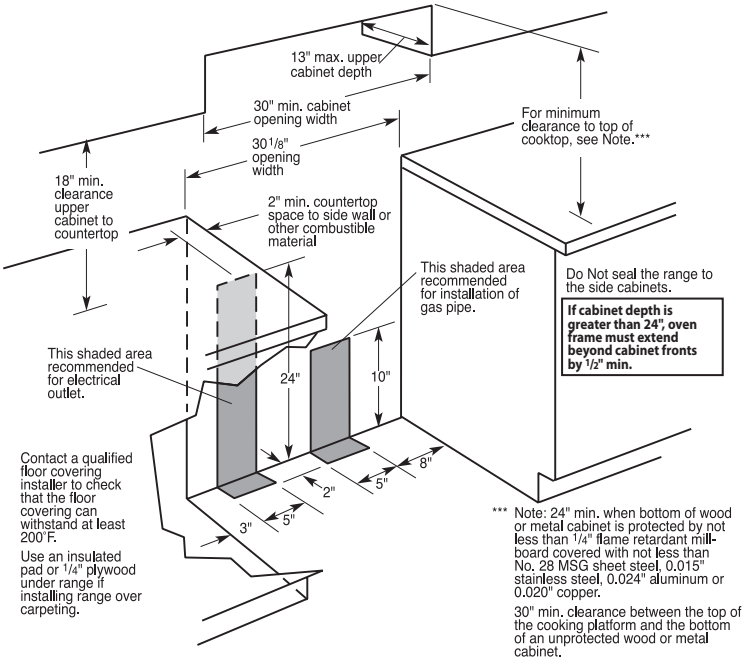
13" max. upper cabinet depth
30" min. cabinet opening width
30 1/8" opening width
For minimum clearance to top of cooktop, see Note.***
18" min. clearance upper cabinet to countertop
2" min. countertop space to side wall or other combustible material
This shaded area recommended for installation of gas pipe.
Do Not seal the range to the side cabinets.
If cabinet depth is greater than 24", oven frame must extend beyond cabinet fronts by 1/2" min.
This shaded area recommended for electrical outlet.
24"
10"
8"
5"
2"
3"
Contact a qualified floor covering installer to check that the floor covering can withstand at least 200˚F.
Use an insulated pad or 1/4" plywood under range if installing range over carpeting.

*** Note: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.

30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

SLIDE-IN GAS RANGE FEATURES & SPECIFICATIONS

	Whirlpool Gold®	
Model No.	**GW399LXU**	**GW397LXU**
Oven		
Temperature Management System	AccuBake®	AccuBake®
Capacity (cu. ft.)	4.5	4.5
TimeSavor™ Convection Cooking System	Yes	—
Cleaning System	Self-Clean	Self-Clean
Automatic Light	Yes	Yes
Light Switch	Touch-Pad	Touch-Pad
Adjustable Racks	2 Full-Width/1 Split	2 Full-Width
Rack Guides	5	5
Sabbath Mode	Yes	Yes
Broiler	Waist-High	Waist-High
Glass Door	Yes	Yes
Window	Extra Large	Extra Large
Bake Burner BTU/hr. Rating (Nat./LP)	15,500/15,500	15,500/15,500
Broil Burner BTU/hr. Rating (Nat./LP)	10,000/9,000	10,000/9,000
Cooktop		
Porcelain-on-Steel SpillGuard™	Yes	Yes
Burner Type	Sealed	Sealed
Ignition	Electronic	Electronic
Surface Burner BTU/hr. Rating (Nat./LP): Left Rear AccuSimmer® Burner	5,000	5,000
Right Front	16,000	14,000
Left Front	12,500	9,200
Right Rear	9,200	9,200
Total Load Gas BTU (Nat./LP):	65,000/58,500	65,000/58,500
Burner Grates	2-Piece Porcelain-Coated-Full-Width Cast-Iron Q — Grey B/S — Black	2-Piece Porcelain-Coated-Full-Width Cast-Iron B/S — Black Q, T — Grey
Non-Turn Grates	Yes	Yes
Lift-Off Control Knobs	Yes	Yes
Controls		
Controls	Electronic	Electronic
General Information		
Storage Drawer	Yes	Yes
Anti-Tip Brackets	Yes	Yes
Approx. Shipping Weight (lbs.)	239	239
Color Availability*	Q, B, S	Q, T, B, S

* Q – White, T – Biscuit, B – Black and S – Stainless Steel

SLIDE-IN GAS RANGE REQUIREMENTS

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

* When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2 ½" (6.4 cm) beyond 24" (61 cm) base cabinet.

** NOTE: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

SLIDE-IN GAS RANGE DIMENSIONS

Models GW399LXU and GW397LXU

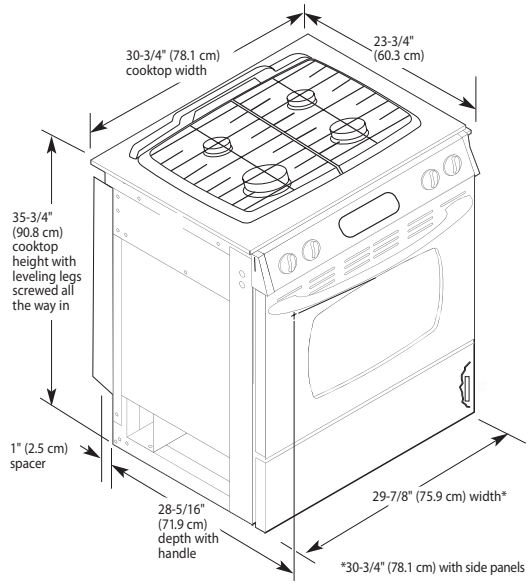
30-3/4" (78.1 cm) cooktop width
23-3/4" (60.3 cm)
35-3/4" (90.8 cm) cooktop height with leveling legs screwed all the way in
1" (2.5 cm) spacer
28-5/16" (71.9 cm) depth with handle
29-7/8" (75.9 cm) width*
*30-3/4" (78.1 cm) with side panels

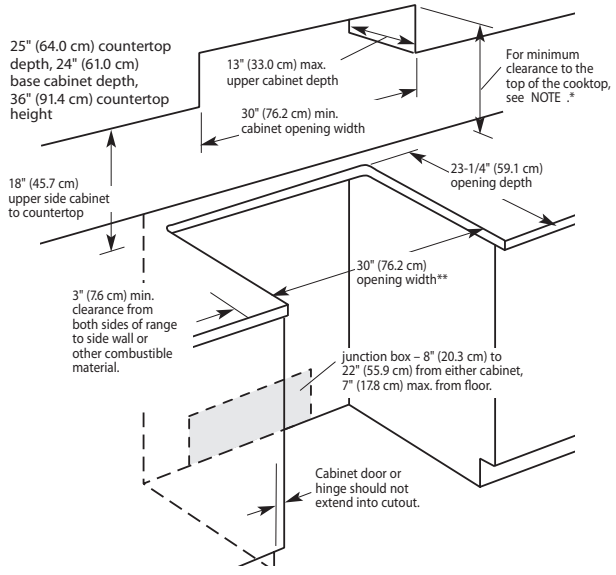
25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth, 36" (91.4 cm) countertop height
13" (33.0 cm) max. upper cabinet depth
For minimum clearance to the top of the cooktop, see NOTE .*
30" (76.2 cm) min. cabinet opening width
18" (45.7 cm) upper side cabinet to countertop
23-1/4" (59.1 cm) opening depth
30" (76.2 cm) opening width**
3" (7.6 cm) min. clearance from both sides of range to side wall or other combustible material.
junction box – 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
Cabinet door or hinge should not extend into cutout.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

SLIDE-IN ELECTRIC RANGE FEATURES & SPECIFICATIONS

	Whirlpool Gold®		
Model No.	**GY399LXU**	**GY397LXU**	**RY160LXT**
Oven			
Convection	TimeSavor™ Plus	—	—
Temperature Management System	AccuBake®	AccuBake®	—
Delay Bake	Yes	Yes	Yes
Capacity (cu. ft.)	4.5	4.5	4.3
Hidden Bake	Yes	—	—
Sabbath Mode	Yes	Yes	—
Cleaning System	Self-Clean	Self-Clean	Self-Clean
Auto Self-Clean Latch	Yes	Yes	—
Automatic Light	Yes	Yes	—
Light Switch	Touch-Pad	Touch-Pad	Rocker
Adjustable Racks	2 Full-Width/ 1 Split	2 Full-Width	2 Full-Width
Rack Guides	5	5	5
Glass Door	Yes	Yes	Yes
Window	Extra Large	Extra Large	Extra Large
Cooktop			
Ceramic-Glass CleanTop®	Yes	Yes	—
Porcelain-on-Steel Cooktop	—	—	Yes
Surface Elements	(2) 6", (1) 6/9", (1) 9/12" Radiant	(2) 6", (2) 6/9" Radiant	(2) 6", (2) 8" Coil
Drip Bowls	—	—	Chrome
Surface Unit Indicator Lights	Yes	Yes	—
General Information			
Storage Drawer	Yes	Yes	Yes
Approx. Shipping Weight (lbs.)	200	200	200
Color Availability*	Q, B, S	Q, T, B, S	Q, B, S

* Q – White, T – Biscuit, B – Black and S – Stainless Steel

SLIDE-IN ELECTRIC RANGE REQUIREMENTS

Do not pinch the power supply cord between the range and the wall.

Do not seal the range to the side cabinets.

25" countertop depth.

24" base cabinet depth.

36" countertop height.

When installed in a 24" (61 cm) base cabinet with 25" (63.5 cm) countertop, front of oven door protrudes 2 ½" (6.4 cm) beyond 24" (61 cm) base cabinet.

* Note: 24" (61 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame-retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum, or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

Contact a qualified floor covering installer to check that the floor covering can withstand at least 200° F.

Use an insulated pad or ¼" plywood under range if installing range over carpeting.

SLIDE-IN ELECTRIC RANGE DIMENSIONS

Models GY399LXU, GY397LXU and RY160LXT

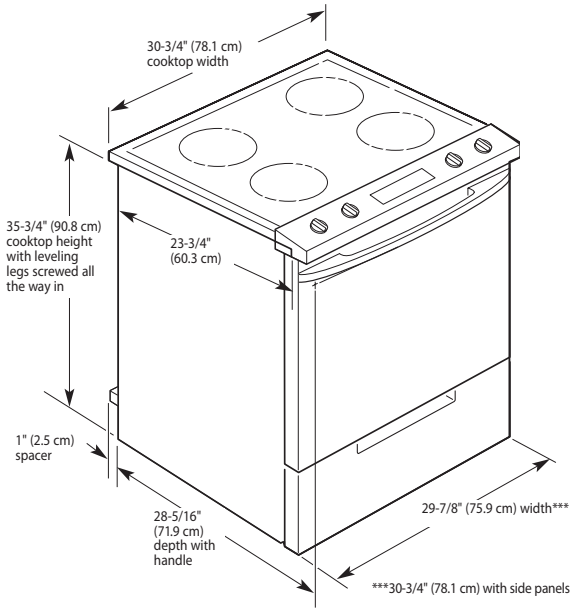
30-3/4" (78.1 cm) cooktop width
35-3/4" (90.8 cm) cooktop height with leveling legs screwed all the way in
23-3/4" (60.3 cm)
1" (2.5 cm) spacer
28-5/16" (71.9 cm) depth with handle
29-7/8" (75.9 cm) width***
***30-3/4" (78.1 cm) with side panels

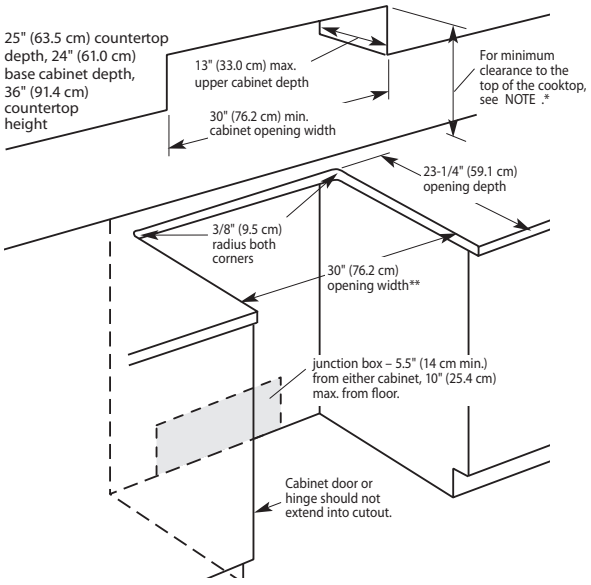
25" (63.5 cm) countertop depth, 24" (61.0 cm) base cabinet depth, 36" (91.4 cm) countertop height
13" (33.0 cm) max. upper cabinet depth
For minimum clearance to the top of the cooktop, see NOTE .*
30" (76.2 cm) min. cabinet opening width
23-1/4" (59.1 cm) opening depth
3/8" (9.5 cm) radius both corners
30" (76.2 cm) opening width**
junction box – 5.5" (14 cm min.) from either cabinet, 10" (25.4 cm) max. from floor.
Cabinet door or hinge should not extend into cutout.

Cabinet opening dimensions shown are for 25" (64 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

DROP-IN ELECTRIC RANGE FEATURES & SPECIFICATIONS

Model No.	WDE350LV	WDE150LV	WDE101LV
Oven			
Temperature Management System	AccuBake®	AccuBake®	—
Capacity (cu. ft.)	4.5	4.5	4.5
Cleaning System	Self-Clean	Self-Clean	Standard
Automatic Light	Yes	Yes	—
Light Switch	Rocker	Rocker	Rocker
Adjustable Racks	2 Full-Width	2 Full-Width	2 Full-Width
EasyView™ Extra Large Window	Yes	Yes	Yes
Cooktop			
Ceramic-Glass CleanTop®	Yes	—	—
Porcelain-on-Steel SpillGuard™	—	Yes	Yes
Elements	(2) 6" and (2) 6"/9" Radiant	(2) 6", (2) 8" High-Speed Coil	(2) 6", (2) 8" Coil
Drip Bowls	—	Chrome	Chrome
Controls			
Controls	Electronic	Electronic	Electronic
Custom Broil	Yes	Yes	Yes
General Information			
Total Connected Load (kw) @ 240 Volts @ 208 Volts	 10.8 kw 9.4 kw	 9.7 kw 8.4 kw	 9.1 kw 7.9 kw
Approx. Shipping Weight (lbs.)	182	160	160
Color Availability*	Q, B, S	Q, T, B, S	Q

* Q – White, T – Biscuit, B – Black and S – Stainless Steel

OPTIONAL ACCESSORIES

(Do not ship with ranges)

6" Backsplash Kits	
Stainless Steel	UXA9107AAS
Black	UXA9107AAB
White	UXA9107AAW
Biscuit	UXA9107AAQ
Filler Kits	
Black	FILL52 BLK
White	FILL52 WHT
Biscuit	FILL52 BIS

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

DROP-IN ELECTRIC RANGE DIMENSIONS

Models WDE350LV, WDE150LV and WDE101LV

Product Dimensions

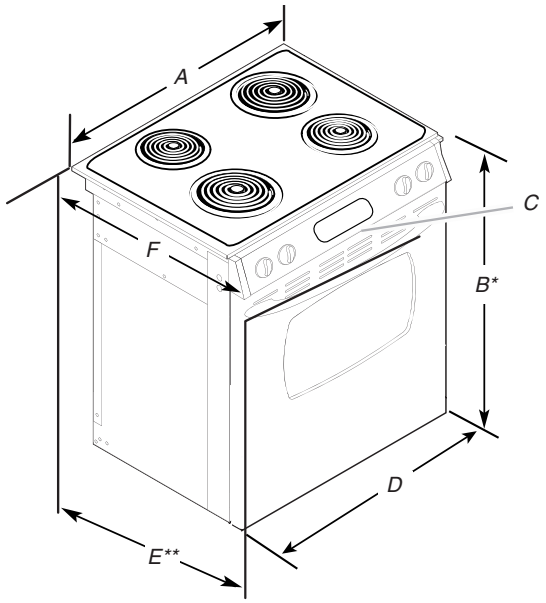

A. 30¾" (78 cm)
*B. 27½" (69.9 cm) height to underside of cooktop edge with leveling legs screwed all the way in**
C. Model/serial number plate (located below the electronic control on oven frame)
D. 29⅞" (75.9 cm)
*E. 28⁵⁄₁₆" (71.9 cm) from handle to standoff at back of range***
F. 23¾" (60.3 cm) countertop notch to rear of cooktop

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**When installed in a 24" (61.0 cm) base cabinet with 25" (63.5 cm) countertop; front of oven door protrudes 2½" (6.4 cm) beyond 24" (61.0 cm) base cabinet.

Counter Top Preparation

The cooktop sides of the drop-in range fit over the cutout edge of your countertop.

If you have a square finish (flat) countertop and the opening width is 30" (76.2 cm), no countertop preparation is required.

Formed front-edged countertops must have molded edge shaved flat ⅜" (1.0 cm) from each front corner of opening.

Tile countertops may need trim cut back ⅜" (1.0 cm) from each front corner and/or rounded edge flattened.

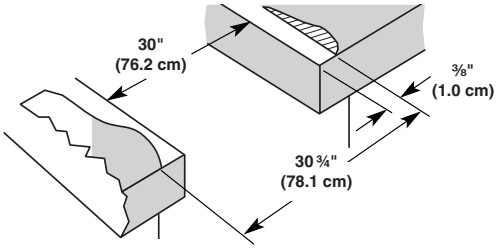

If countertop opening width is greater than 30" (76.2 cm), adjust the ⅜" (1.0 cm) dimension.

Countertop must be level. Check levelness by placing level on countertop, first side to side, then front to back.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

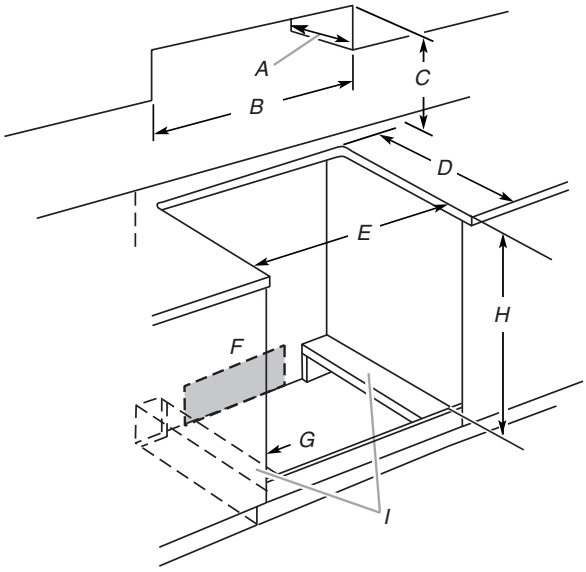

A. 13" (33 cm) upper cabinet depth
B. 30" (76.2 cm) min. opening width
C. For minimum clearance to the top of the cooktop, see NOTE.*
D. 23¼" (58.1 cm) opening depth
E. 30" (76.2 cm) min. opening width
F. Junction box - 5.5" (14 cm) min. from either cabinet, 8¼" (21 cm) max. from floor
G. Cabinet door or hinge should not extend into cutout.
H. 27½" (69.9 cm) top of countertop to support slats
I. 6" (15.2 cm) wide support slat on each side of cutout

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is protected by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.

MICROWAVE/HOODS FEATURES & SPECIFICATIONS

	Whirlpool Gold®			
	SpeedCook Appliances	Microwave/Hood Combinations		
Model No.	**GH7208XR**	**GMH6185XV**	**GMH5205XV**	**GMH5184XV**
Microwave				
Capacity (cu. ft.)	2.0	1.8	2.0	1.8
Cooking Power (watts)	1200	1100	1100	1000
Cooking Functions				
g2Max® SpeedCook Technology	Yes	—	—	—
TimeSavor™ Plus Convection System	Yes	Yes	—	—
Grilling Function	Yes	—	—	Yes
AccuWave® System	Yes	—	Yes	—
6th Sense™ Cooking System	Yes	Yes	Yes	Yes
Add 30 Seconds	Yes	Yes	Yes	Yes
Programmed Cooking	4-Stage	3-Stage	3-Stage	3-Stage
Variable Power Levels	10	10	10	10
Warm Hold	Yes	Yes	Yes	Yes
Personal Choice (Most Used)	Yes	—	—	—
Cycles				
AccuSimmer® Cycle	Yes	Yes	Yes	Yes
Kids Menu	Yes	Yes	Yes	—
Steam Cooking	Yes	Yes	Yes	Yes
Soften/Melt	Yes	Yes	Yes	Yes
Dinner Plate	Yes	Yes	Yes	Yes
Popcorn	Yes	Yes	Yes	Yes
Baked Potato	Yes	Yes	Yes	Yes
Beverage	Yes	Yes	Yes	Yes
Convenience				
Silver Metallic CleanRelease® Interior	Yes**	Yes	Yes	Yes
Recessed Glass Turntable	Stoppable	Stoppable	Stoppable	Stoppable
Rack	Grill Rack	Convection Rack	Cooking Rack	Grill Rack
Crisper Pan with Handle	Yes	—	—	—
SureMist® Steamer	Yes	Yes	Optional	Optional
Child Lockout	Yes	Yes	Yes	Yes
Hood				
TruCapture® Ventilation System	Yes	—	—	—
Exhaust Fan	4-Speed	4-Speed	4-Speed	4-Speed
EZ-Vue™ Cooktop Lighting	Yes	Yes	Yes	Yes
Odor Removal Filter (Charcoal)	Yes	Yes	Yes	Yes
Dishwasher Safe Grease Filter(s)	Yes	Yes	Yes	Yes
Filter Change Indicator	—	Yes	Yes	Yes
General Information				
Exterior Dimensions (in.) W x H x D	29 7/8" W x 15 1/2" H x 16" D (front of door) 18 1/4" D (front of handle)	29 15/16" W x 17 1/4" H x 16" D (front of door) 18" D (front of handle)	29 15/16" W x 17 1/4" H x 16" D (front of door) 18" D (front of handle)	29 15/16" W x 17 1/4" H x 16" D (front of door) 18" D (front of handle)
Convertible for Vented or Non-Vented Use	Yes	Yes	Yes	Yes
Approx. Shipping Weight (lbs)	96	62	61	72
Stainless Steel Finish Handle†	—	Yes	Yes	Yes
Hidden Vent	Yes	Yes	Yes	Yes
Color Availability*	Q, B, S, Y	Q, B, S	Q, T, B, S	Q, T, B, S

* Q – White, T – Biscuit, B – Black, S – Stainless Steel, Y – Monochromatic Stainless Steel and D – Universal Silver
** GH7208XR-Velos maintains current CleanRelease® interior color
† Only on Stainless Steel models

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

MICROWAVE/HOODS FEATURES & SPECIFICATIONS

Microwave/Hood Combinations			
WMH3205XV	**WMH2205XV**	**WMH2175XV**	**WMH1162XV**
2.0	2.0	1.7	1.6
1000	1000	1000	950
—	—	—	—
—	—	—	—
—	—	—	—
—	—	—	—
Yes	Yes	Yes	—
Yes	Yes	Yes	Yes
3-Stage	3-Stage	3-Stage	2-Stage
10	10	10	10
Yes	Yes	Yes	—
—	—	—	—
Yes	—	—	—
—	—	—	—
Yes	Yes	—	—
Yes	Yes	—	—
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	—
Yes	—	—	—
Stoppable	Stoppable	Stoppable	Yes
Cooking Rack	Cooking Rack	Cooking Rack	—
—	—	—	—
Optional	Optional	—	—
Yes	Yes	Yes	Yes
—	—	—	—
3-Speed	3-Speed	2-Speed	2-Speed
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
29 15/16" W x 17 1/4" H x 16" D (front of door) 18" D (front of handle)	29 15/16" W x 17 1/4" H x 16" D (front of door) 18" D (front of handle)	29 15/16" W x 17 1/4" H x 16" D (front of door) 17 3/4" D (front of handle)	29 15/16" W x 17 1/4" H x 15 7/16" D (front of door) 17 3/4" D (front of handle)
Yes	Yes	Yes	Yes
74	74	72	72
Yes	Yes	Yes	Yes
Yes	Yes	Yes	Yes
Q, B, S	Q, B, S	Q, T, B, S	Q, B, S, D

MHC DIMENSIONS

Note: There must be at least one wall stud within cabinet opening.

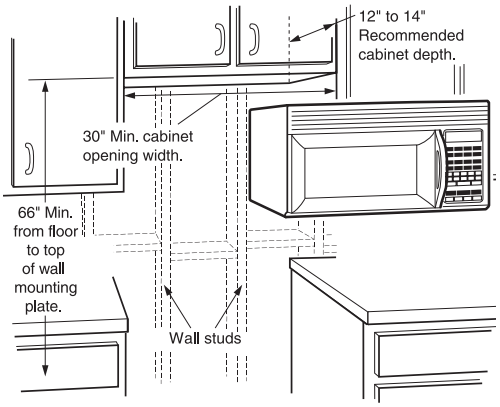

COUNTERTOP MICROWAVE FEATURES & SPECIFICATIONS

Model No.	Whirlpool Gold® GT4175SP	MT4155SP	MT4110SP	MT4078SP
Microwave				
Capacity (cu. ft.)	1.7	1.5	1.1	0.7
Cooking Power (watts)	1200	1200	1100	700
Cooking Functions				
Sensor Cooking	Yes	Yes	—	—
MaxWave™ Microwave System	Yes	Yes	Yes	—
Programmed Cooking	4-Stage	4-Stage	4-Stage	4-Stage
EZ-Choice® Cycles	Yes	Yes	Yes	Yes
Variable Power Levels	10	10	10	10
Add Minute/ Add 30 Sec.	Add 30 Sec.	Add 30 Sec.	Add 30 Sec.	Add Minute
Warm/Hold	Yes	Yes	Yes	Yes
Personal Choice	Yes	Yes	Yes	—
Cycles				
Baked Potato	Yes — Sensor	Yes — Sensor	Yes	Yes
Dinner Plate	Yes — Sensor	Yes — Sensor	Yes	Yes
Beverage	—	—	Yes	Yes
Frozen Entree	Yes — Sensor	Yes — Sensor	Yes	Yes
Defrost	Yes	Yes	Yes	Yes
Reheat	Yes — Sensor**	Yes	Yes	—
Cook	Yes — Sensor**	Yes — Sensor**	Yes	—
Casserole	Yes — Sensor	Yes — Sensor	Yes	Yes
Popcorn	Yes — Sensor	Yes — Sensor	Yes	Yes
Vegetable	Yes — Sensor	Yes — Sensor	Yes	Yes
Convenience				
Glass Turntable	Yes — Sunken	Yes — Sunken	Yes — Sunken	Yes — Sunken
Child Lockout	Yes	Yes	Yes	Yes
General Information				
Cavity Dimensions (in.) (W x H x D)	16" W x 10" H x 15" D	15 17/25" W x 9 17/25" H x 15 14/25" D	13" W x 8" H x 14" D	13" W x 8" H x 14" D
Exterior Dimensions (in.) (W x H x D)	22 19/32" W x 13 17/32" H x 17 5/16" D	21 7/8" W x 12 1/2" H x 17 1/8" D	20 1/8" W x 11 7/8" H x 15 1/8" D	18" W x 11" H x 12 3/8" D
Under-the-Cabinet Kit†	—	—	—	Included
Approx. Shipping Weight (lbs.)	47	39	38	38
Color Availability*	Q, T, B, S	Q, T, B, S	Q, B	Q, B

* Q – White-on-White, T – Biscuit-on-Biscuit, B – Black-on-Black and S – Stainless Steel
** Certain Food Classes
† Under-the-Cabinet Kit included with model MT4078SP

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

COUNTERTOP MICROWAVE DIMENSIONS

CUTOUT DIMENSIONS

Models	Microwave Oven A Width	Microwave Oven B Height (min.)	Microwave Oven C Depth	Lower Oven D Width	Lower Oven E Height (min.)	Lower Oven F Height	Lower Oven G Depth
Above 30" Single Oven							
1.7 cu. ft.	28 ½	16 ¾	21	28 ½	3	27 ¾	23 ¼
1.5 cu. ft.	28 ½	15 ¾	18 ½	28 ½	3	27 ¾	23 ¼
Above 27" Single Oven							
1.7 cu. ft.	25 ½	16 ¾	21	25 ½	3	27 ¾	23 ¼
1.5 cu. ft.	25 ½	15 ¾	18 ½	25 ½	3	27 ¾	23 ¼
Above 24" Single Oven							
1.5 cu. ft.	22 ½	15 ¾	18 ½	22 ½	3	27 ¾	23 ¼
Not Approved for Over Heat Source							
0.7 cu. ft.	22 ½	15 ¾	15	—	—	—	—

All dimensions are shown in inches.

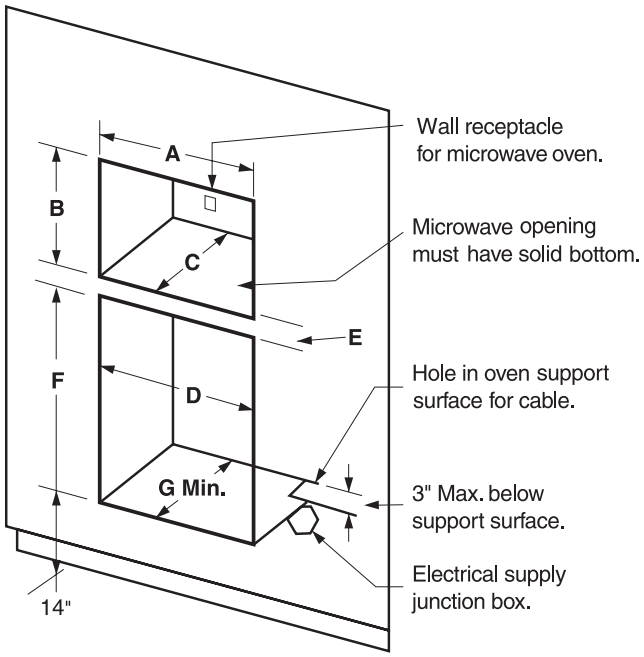

Cutout dimensions (shown in inches) for installing Whirlpool® microwave ovens above Whirlpool® ovens using MK series kits.

UTC (UNDER-THE-CABINET) MOUNTING KIT

Microwave Model No.	UTC Kit Part No.
MT4078SP	Packed with Product

Note: Space between countertop and mounted microwave must be at least 7 ⅞". For mounting and dismounting ease, allow adequate space (approx. 2 9⁄16") between unit and adjacent wall or appliance.

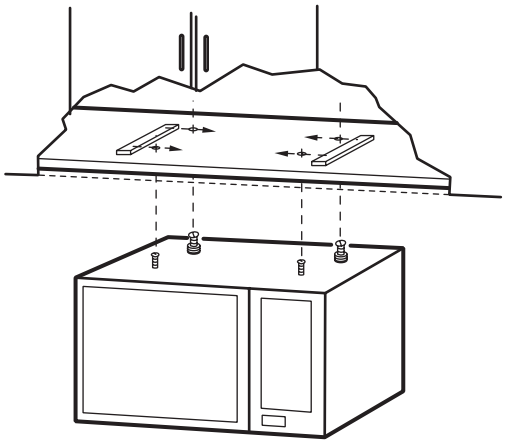

TRIM KITS

Microwave Model No.	30" Trim Kit	Exterior Dim. (W x H)	Interior Dim. (W x H)	27" Trim Kit	Exterior Dim. (W x H)	Interior Dim. (W x H)	24" Trim Kit	Exterior Dim. (W x H)	Interior Dim. (W x H)
Built-In Applications Over a Heat Source									
GT4175SP	MK1170XP	29 25⁄32 x 19 1⁄64	24 x 12 ⅞	MK1177XP	26 27⁄32 x 19 1⁄64	24 x 12 ⅞	—	—	—
MT4155SP	MK1150XV	29 25⁄32 x 18 1⁄32	22 1⁄16 x 11 ⅞	MK1157XV	26 27⁄32 x 18 1⁄32	22 1⁄16 x 11 ⅞	MK1154XV	23 25⁄32 x 18 1⁄32	22 1⁄16 x 11 ⅞

All dimensions are shown in inches.